

PCB 0

MCPCB. 96-48 8-4 24

025. 020

25


PCB

PCB

Material	FR-4	Thickness	0.1-5mm
Surface Finish	OSP / HASL	Plating	0.2mm
Drill Tolerance	±0.05mm	Annular Ring	0.2mm
ISO9001	UL / SGS	Lead Time	10 days
Q / Design	10PCS-100PCS	Price	\$ 0.1 - \$ 10

Lead Time

Lead Time	16 days
Lead Time	7-12days

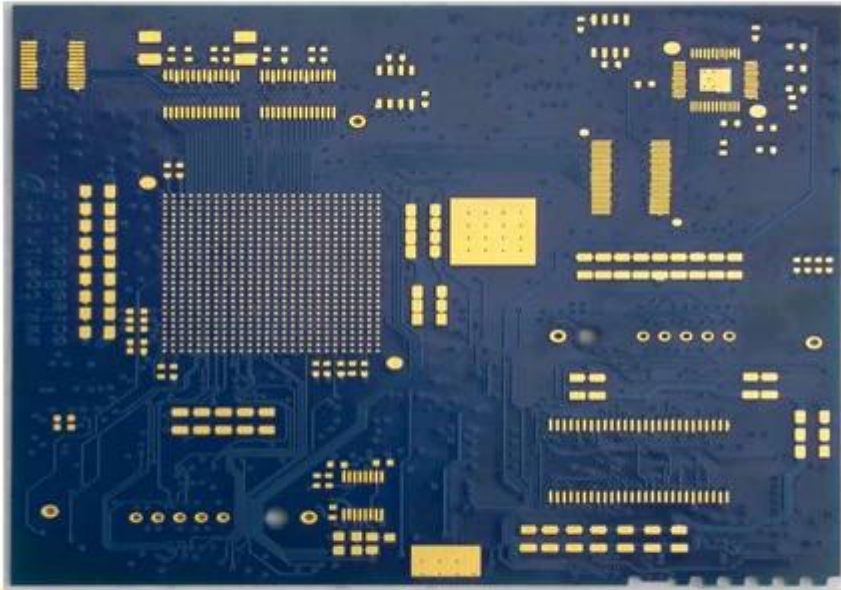

www.o-leading.com

□□□□□□

MDI PCB □□□□ □□□□□□□□ □□□□□□□□□□ □□□□□□ □□□□□□ **Bare** □□□□□□□□ □□□□□□ □□□□□□

□□□□□□ □□□

16 □□□□□□ □□□□ □□□□□□□□ □□□□□□□□ □□□□□□ □□□□□□ □□□□□□

□□□□	2014		2015 ~ 2016		2017 ~ 2018	
	□□□□□□	□□□□□□	□□□□□□	□□□□□□	□□□□□□	□□□□□□
□□□□□□□□ □□□□	32	42	38	44	42	48
□□□□□□□□) □□□□□□□□ / □□□□□□ □□□□□□□□)	50/50	40/45	40/45	40/40	35/40	35/35
□□□□□□ □□□□□□ □□□□ (□□□□□□□□)	0.15	0.10	0.15	0.10	0.15	0.10
□□□□□□ □□□□□□ □□□ PTH	14: 1	16: 1	16: 1	18: 1	18: 1	20: 1
N + C + N	4 + C + 4	5 + C + 5	5 + C + 5	6 + C + 6	5 + C + 5	6 + C + 6
□□□□□□ □□□□□□ □□□	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6
□□□□ □□□□□□□□ □□□□	□□□□□□ □□□□	-	□□□□□□ □□□□	-	□□□□□□ □□□□	-
□□□□□□□□□□) □□□□□□□□□□ □□□□□□□□□□□□ □□□□□□□□□□) (□□□□□□□□□□)	50	40	40	30	40	30
□□□□□□□□□□) □□□□□□□□□□ □□□□□□□□□□□□	75	65	65	50	50	40
□□□□ □□□□□□ □□□□ □□□□ □□□□□□□□ / □□□□	□□□□□□ □□□□	-	□□□□□□ □□□□	-	□□□□□□ □□□□	-
□□□□□□	FR4 □ Megtron □ Nelco □ Rogers □ □□□□ □ □□□□□□□ □□□□□□□□.					
□□□□□□□□□□ □□□□□□ □□ □□□□□□ □□ □□□□□□ □□□□□□□□ □□□□□□	□□□□□□ □□□□	-	□□□□□□ □□□□	-	□□□□□□ □□□□	-

□□□□ □□□□	□□□□□ □□ □□□□ hasl □ enig □ osp □ □ □□□□ □□□□□□□ □ □□□□ □□□□□ □ □□□□□□□ □□□□ □□□ □□□□ □ □□□□ □□□□ □□□□ □ □□□ □□□□ □□□□ □□□□ Peelable □ □□□□□□□ □□□□
-----------	---







QUALITY MANAGEMENT SYSTEM CERTIFICATE

Certificate No.: 16118Q10347R05

We hereby certify that

O-LEADING SUPPLY CHAIN(HK) CO.,LIMITED
 Credit No.: 61691591-000-07-17-2
 Registration Add: ROOM 603D 6/F HANG PONG COMMERCIAL BUILDING,31
 TONKIN ST,CHEUNG SHA WAN,KL, HK
 Business Add:1313 Floor 13,Fortune Building,DanShui Town,Huiyang District,
 Huizhou, Guangdong,China

Has implemented and maintains a **Quality Management System**
 Which fulfills the requirements of the following standards
 GB/T19001-2016 idt ISO9001:2015

Scope of certification
 Sales of printed circuit boards

Initial Issuance period: February 27, 2018
 This certificate is valid during: February 27, 2018 -- February 26, 2021
 This certificate is invalid without CICC qualified label in the following period

First supervision and audit	Qualified mark	Second supervision and audit	Qualified mark
-----------------------------	----------------	------------------------------	----------------

The certification registration scope doesn't include the production services scope which fail to be covered by the relevant effective administrative permission and qualification permission required by the state. The effectiveness of this certificate shall be evaluated by annual surveillance audit of CICC. The certificate shall be valid when used together with the surveillance audit conclusion. The related information of this certification can be searched at the public website of company www.cicc.com.cn.

ZPMV2.E490354
Wiring, Printed - Component

For enhanced search functionality, please visit UL's [online family of databases](#).
 Click on a product designation for complete information.
[Page Bottom](#)

Wiring, Printed - Component

[See General Information for Wiring, Printed - Components](#)

O-LEADING SUPPLY CHAIN CO LIMITED 4190354
 Fortune Building, Nanheng West Road
 Room 1313
 Huizhou, Guangdong 516211, CHINA

	Cond Width			SS/ DS/ DS0	Area	Solder Limits	Dper	Temp	Flame	RoHS	C
	Min	Max	Max								
	Min	Cond	SS/ DS/ DS0	Area	Solder Limits	Dper	Temp	Flame	RoHS	C	
	Edge	Thk	DS/ DS0	Diam	Temp	Class	DSR	I			
Multi-layer (mass laminate) printed wiring boards.											
D-LEADING-401											
	0.2 (0.004)	0.3 (0.012)	34 (1.34)	D6	12.7 (0.5)	260	10	130	V-0	-	-
D-LEADING-407											
	0.08 (0.003)	0.2 (0.008)	17 (0.67)	D5	9.7 (0.4)	260	10	170	V-0	NI	-
Multi-layer printed wiring boards.											
D-LEADING-408											
	0.125 (0.005)	0.125 (0.005)	12 (0.47) (1:1.35)	D6	50.8 (2.0)	280	20	130	V-0	NI	*
Single layer printed wiring boards.											
D-LEADING-002											
	0.76 (0.015)	1.14 (0.045)	34 (1.34)	S5	19.1 (0.8)	260	10	105	V-0	NI	-
D-LEADING-003											
	0.38 (0.015)	1.14 (0.045)	34 (1.34)	S5	19.1 (0.8)	260	10	130	V-0	▲	-
D-LEADING-033											
	0.15 (0.006)	0.3 (0.012)	34 (1.34)	S5	25.4 (1.0)	260	10	120	V-0	NI	-
D-LEADING-205											
	0.1 (0.004)	0.3 (0.012)	34 (1.34)	D6	69.6 (2.7)	260	10	130	V-0	NI	-
D-LEADING-206											
	0.15 (0.006)	0.33 (0.013)	17 (0.67)	D5	69.6 (2.7)	260	10	130	V-0	NI	-

* - CTI marking is optional and may be marked on the printed wiring board.

Marking: Company name or file number and type designation. May be followed by a suffix to denote factory identification or burning test classification.
 Last updated on 2017-01-27

Questions? [Print this page](#) [Terms of Use](#) [Page Top](#)



Test Report No. CAVEC1805164701 Date: 03 Apr 2018 Page 2 of 8

Test Results:

Test Part Description:

Specimen No. **SGS Sample ID Description**
 SN1 CAN18-051647.001 Green "PCB"

Remarks:

- (1) 1 mg/kg = 1 ppm = 0.0001%
- (2) MDL = Method Detection Limit
- (3) ND = Not Detected (< MDL)
- (4) "-" = Not Regulated

RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU

Test Method: With reference to IEC 62321-4:2014+A1:2017, IEC 62321-5:2013, IEC 62321-7-2:2017, IEC 62321-6:2015 and IEC 62321-8:2017, analyzed by ICP-OES, UV-Vis and GC-MS

Test Item(s)	Limit	Unit	MCL	DET
Cadmium (Cd)	100	mg/kg	2	ND
Lead (Pb)	1,000	mg/kg	2	9
Mercury (Hg)	1,000	mg/kg	2	ND
Hexavalent Chromium (CrVI)	1,000	mg/kg	8	ND
Sum of PBBs	1,000	mg/kg	-	ND
Mono-bromobiphenyl	-	mg/kg	5	ND
Dibromobiphenyl	-	mg/kg	5	ND
Tribromobiphenyl	-	mg/kg	5	ND
Tetrabromobiphenyl	-	mg/kg	5	ND
Pentabromobiphenyl	-	mg/kg	5	ND
Hexabromobiphenyl	-	mg/kg	5	ND
Heptabromobiphenyl	-	mg/kg	5	ND
Octabromobiphenyl	-	mg/kg	5	ND
Nonabromobiphenyl	-	mg/kg	5	ND
Decabromobiphenyl	-	mg/kg	5	ND
Sum of PBDEs	1,000	mg/kg	-	ND
Mono-bromodiphenyl ether	-	mg/kg	5	ND
Dibromodiphenyl ether	-	mg/kg	5	ND
Tribromodiphenyl ether	-	mg/kg	5	ND
Tetrabromodiphenyl ether	-	mg/kg	5	ND
Pentabromodiphenyl ether	-	mg/kg	5	ND



SGS is pleased to announce the addition of the following services to its current range of services. SGS is pleased to announce the addition of the following services to its current range of services. SGS is pleased to announce the addition of the following services to its current range of services.

3. what 材料 種類 種類 o- 種類 種類

FR4 種類 種類 TG 種類 種類 種類 種類 種類 種類 Arlon 種類 Telfon 種類 種類 種類 種類 / 種類 種類 種類 PI 種類 種類.

4. 種類 種類 種類 種類 種類 種類 種類 種類 種類 種類 種類 種類 種類 種類 種類 種類

種類 種類 種類 種類 種類 Gerber 274-X. 種類 種類 種類 種類 種類 種類 種類 Cam350 種類 CAD 種類 Protel 99se 種類 PADS 種類 DXP 種類 Eagle.

5. 種類 種類 種類 種類 種類 種類 種類 種類 種類 種類 種類 種類 種類 種類 種類 種類

種類 種類 ← 種類 種類 種類 ← 種類 種類 種類 ← AOI 種類 種類 種類 種類 ← 種類 種類 種類 ← 種類 種類 種類 ← 種類 種類 種類 ← PTH ← ← 種類 種類 種類 ← 種類 種類 種類 ← 種類 種類 種類 ← 種類 種類 種類 ← 種類 種類 種類 種類 ← 種類 種類 種類 種類 ← 種類 種類 種類 ← E / T ← 種類 種類 種類.