

O-Leading

10 年 專業 製造 各種 PCB 產品。 包括 - 銅板, 鋁板, 銅 PCB, 鋁 PCB 及 MCPCB。 我們 48-96 小時 提供 24 小時 4-8 小時 4-8 小時 專業 製造 各種 印刷 電路 板。

表面 粗糙度 0.025 AVG, .020 min .. 專業 製造 各種 印刷 電路 板。

專業 製造 各種 印刷 電路 板, 25 年 / 專業 製造, 專業 製造 各種 印刷 電路 板。

專業 製造

專業 製造

地點	Guang Dong, China (中國)	產品	o-leading.
材料	FR-4, 銅板	厚度	0.5oz-5oz.
厚度	0.2mm.	公差	0.2mm.
表面處理	銅板, OSP, 各種 HASL.	價格	\$ 0.1- \$ 10.
其他	LED, 各種, 各種, 各種	產品	各種 PCB
認證	ISO9001, UL, RoHS, SGS.	Q / CTN.	10pcs-100pcs.
重量	0.01kg -5kg.	MOQ	10pcs.
其他	各種 PCB 各種 PCBA 各種	厚度	0.1-5mm.
其他	各種, 各種, 各種, 各種	公差	0.2mm.
design 各種	各種 各種	其他	0.01m3-10m3.

專業 製造


專業 製造 :	16 年 專業 OEM PCB 專業 製造
專業 製造 :	7-12 年

專業 製造 PCB 各種

項目	2014 年		2015 ~ 2016.		2017 ~ 2018.	
	項目	項目	項目	項目	項目	項目
厚度	32.	42.	38.	44.	42.	48.
厚度 / 公差 (µm)	50/50.	40/45.	40/45.	40/40.	35/40.	35/35.
Min Drill Hole. (mm)	0.15.	0.10.	0.15.	0.10.	0.15.	0.10.
其他	14 : 1.	16 : 1.	16 : 1.	18 : 1.	18 : 1.	20 : 1.
N + C + N.	4 + C + 4.	5 + C + 5.	5 + C + 5.	6 + C + 6.	5 + C + 5.	6 + C + 6.
其他	5 + 2 + 5.	6 + 2 + 6.	5 + 2 + 5.	6 + 2 + 6.	5 + 2 + 5.	6 + 2 + 6.
其他	-	-	-	-	-	-
公差 (µm)	50	40.	40.	30.	40.	30.
公差 (µm)	75.	65.	65.	50	50	40.
其他	-	-	-	-	-	-
材料	FR4, Megtron, Nelco, Rogers, 各種					
其他 PCB.	-	-	-	-	-	-

<p>PCB 制程</p>	<p>HASL, ENIG, OSP, 沉金, 沉锡, 沉镍, 沉铜, 电镀, 蚀刻, 钻孔, 铣孔, 磨孔, 喷锡, 喷油, 喷粉, 喷胶, 喷漆, 喷膜, 喷布, 喷纸, 喷布, 喷纸, 喷布, 喷纸</p>
---------------	--

O-LEADING
To Be Reliable, To Be Valuable

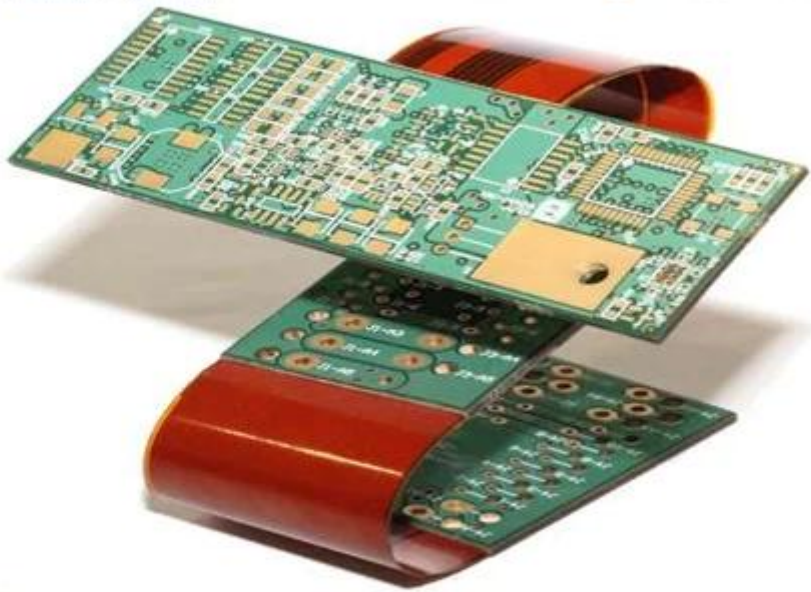









201726 201VZL430354 - Wiring, Printed - Component



ZPMV2.E490354
Wiring, Printed - Component

For enhanced search functionality, please visit UL's [online family of databases](#).
Click on a product designation for complete information.

Page Bottom

Wiring, Printed - Component

See General Information for Wiring, Printed - Components

O-LEADING SUPPLY CHAIN CO LIMITED

E490354

Fortune Building, Nanheng West Road
Room 1313
Huizhou, Guangdong 516211, CHINA

Type	Cond Width			SS/ DS/	Area Diam	Solder		Flame	RoHS	C
	Min	Max	Min			Max	Temp			
Hub/Bayer (mass laminate) printed wiring boards.										
D-LEADING-401										
	0.2 (0.004)	0.3 (0.012)	34 (1.34)	D6	12.7 (0.5)	260	10	130	V-0	-
D-LEADING-407										
	0.08 (0.003)	0.2 (0.008)	17 (0.67)	D5	9.2 (0.4)	260	10	170	V-0	NI
Hub/Bayer printed wiring boards.										
D-LEADING-408										
	0.125 (0.005)	0.125 (0.005)	12 (0.47) min:1.35	D6	50.8 (2.0)	260	20	130	V-0	NI
Single layer printed wiring boards.										
D-LEADING-002										
	0.76 (0.015)	1.14 (0.045)	34 (1.34)	S5	19.1 (0.8)	260	10	105	V-0	NI
D-LEADING-003										
	0.38 (0.015)	1.14 (0.045)	34 (1.34)	S5	19.1 (0.8)	260	10	130	V-0	▲
D-LEADING-033										
	0.15 (0.006)	0.3 (0.012)	34 (1.34)	S5	25.4 (1.0)	260	10	120	V-0	NI
D-LEADING-205										
	0.1 (0.004)	0.3 (0.012)	34 (1.34)	D6	69.6 (2.7)	260	10	130	V-0	NI
D-LEADING-206										
	0.15 (0.006)	0.33 (0.013)	17 (0.67)	D5	69.6 (2.7)	260	10	130	V-0	NI

* - CTI marking is optional and may be marked on the printed wiring board.

Marking: Company name or file number and type designation. May be followed by a suffix to denote factory identification or burning test classification.
Last updated on 2017-01-27

Questions? [Print this page](#) [Terms of Use](#) [Page Top](#)

http://www.ul.com/onlinecertifications/UL60718RMS/ewg/ul/Prod/ZPMV2.E490354/cond/Wiring,Printed-Component/10



Test Report

No. CANEC1805164701

Date: 03 Apr 2018

Page 2 of 8

Test Results:

Test Part Description:

Specimen No. **SGS Sample ID** **Description**
SN1 CAN18-051647.001 Green "PCB"

Remarks:

- (1) 1 mg/kg = 1 ppm = 0.0001%
- (2) MDL = Method Detection Limit
- (3) ND = Not Detected (< MDL)
- (4) "-" = Not Regulated

RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU

Test Method: With reference to IEC 62321-4:2014+A1:2017, IEC62321-5:2013, IEC62321-7-2:2017, IEC 62321-6:2015 and IEC62321-8:2017, analyzed by ICP-OES, UV-Vis and GC-MS.

Test Item(s)	Limit	Unit	MDL	Det
Cadmium (Cd)	100	mg/kg	2	ND
Lead (Pb)	1,000	mg/kg	2	9
Mercury (Hg)	1,000	mg/kg	2	ND
Hexavalent Chromium (CrVI)	1,000	mg/kg	8	ND
Sum of PBBs	1,000	mg/kg	-	ND
Monobromobiphenyl	-	mg/kg	5	ND
Dibromobiphenyl	-	mg/kg	5	ND
Tribromobiphenyl	-	mg/kg	5	ND
Tetrabromobiphenyl	-	mg/kg	5	ND
Pentabromobiphenyl	-	mg/kg	5	ND
Hexabromobiphenyl	-	mg/kg	5	ND
Heptabromobiphenyl	-	mg/kg	5	ND
Octabromobiphenyl	-	mg/kg	5	ND
Nonabromobiphenyl	-	mg/kg	5	ND
Decabromobiphenyl	-	mg/kg	5	ND
Sum of PBDEs	1,000	mg/kg	-	ND
Monobromodiphenyl ether	-	mg/kg	5	ND
Dibromodiphenyl ether	-	mg/kg	5	ND
Tribromodiphenyl ether	-	mg/kg	5	ND
Tetrabromodiphenyl ether	-	mg/kg	5	ND
Pentabromodiphenyl ether	-	mg/kg	5	ND



SGS is pleased to announce the launch of its new online certification platform, which provides a secure and efficient way for clients to manage their certification needs. The platform offers a range of services, including the issuance of certificates, the management of certificates, and the provision of technical support. For more information, please visit [www.sgs.com](#).

Member of the SGS Group (SGS SA)

00 00 00	16 0 00 OEM PCB 00 0000
00 00 00	7-12 0



1. O-Leading 000 000 000000?

000 000 000 000 00 000000.

1.The 000000 ISO 9001 : 2008 0000 0000 000000.

2. 00 000 0000 0 000000 000 0000 0

3. 0000 000 00 0 00. 00 00, 000 000, X 0 00, AOI (00 00 000) 0 ICT (0 - 00 000).

00 00 00 000 00 4.Dedicated 00 00 0

5. 0000 00 00 0 00

2. O-Leading 000 0000 000000?

00 10 0 00, 00 000 (0 : 00, 00 00)0 000 0 00 0 00 000000. 00 00 RMB0 00 00 00 31 %0 0000. 0000 000 00 00 000000. 0000 O-Leading0 000 00 000 00 000000. 0000 0000 00 00, 0000 000 0000 000000 0 0000 00 00 0000. 0000 000 000 00 0000 000000 00 0000 000000.

0000 0000 00 000000 000000. 0000 000000 0000 0000 000000 00 0 0 0000 00 0000 0 000000.

3. 00 000 000 000000 00 0 0 00000?

00000 FR4, High-TG 0 0000 00 00, 0000, Arlon, Telfon, 00000 / 00 00 00, PI 0

4. PCB 0000 0000 000000 000000?

Gerber 274-X 00000 00000 00000 00 00 00000. 00 CAM350, CAD, Protel 99SE, Pads, DXP 0 Eagle0 00 0 00

□□□□.

5. □□ □□ PCB□ □□□□ □□□□ □□ □□□□□?

□□ □□ → □□ □□□ □□ → □□ □□ → □□ AOI → □□ □□ → □□□□ □□ → □□□□ → PTH → □□ □□ → □□ □□ □□ → □□ □□ → □□ □□ → □□ AOI → □□ □□□ → □□ □□ □□ → □□ □□ → □□□□ → E / T → □□□□ □□.