



COPPER PLATE HOLES MINIMUM .025 AVG, .020 MIN.. HOLES MAY NOT BE PLUGGED  
Special requirement:ENIG, Impedance: Tol: +/-7%, Press fit hole

Pack with colorless transparent bubble film ,25 PCS/ bag, put desiccant in flank, put humidity indicator card on top side

Layer structure

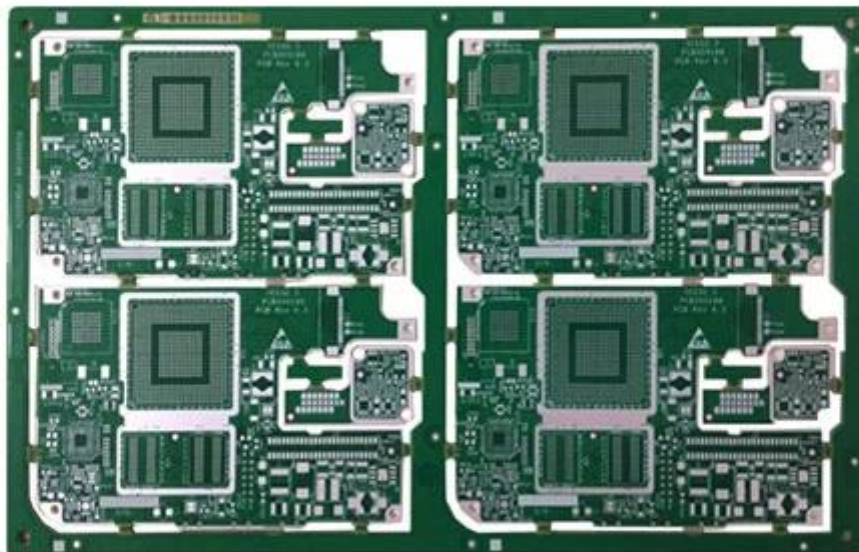

[www.o-leading.com](http://www.o-leading.com)

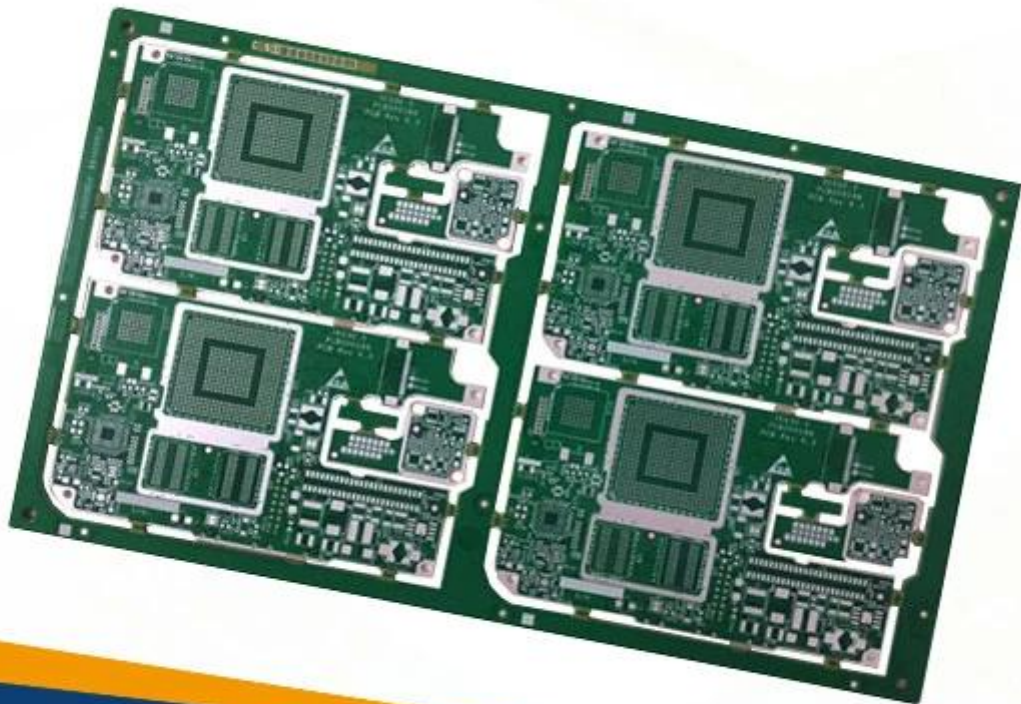

[www.o-leading.com](http://www.o-leading.com)



[www.o-leading.com](http://www.o-leading.com)

[Printed circuit board company, PCB with impedance control, Small volume pcb manufacturer](#)