


COPPER PLATE HOLES MINIMUM .025 AVG, .020 MIN.. HOLES MAY NOT BE PLUGGED


This PN required 10% impedance, 8mil laser drill, POFV, stacked via, laser blind via drill thru 6mil dielectric and plug and plating flat via

Pack with colorless transparent bubble film ,25 PCS/ bag, put desiccant in flank, put humidity indicator card on top side

Layer structure

Custom Info	Lyr	Image	Foil	Name
COMP			0.5oz	Foil 1/2oz(RTF)
				R-5670K 1080 RC64%
6+/-0.9mil				R-5670K 1080 RC64%
			0.5oz	Foil 1/2oz(RTF)
L2				R-5670K 3313 RC54%
3.9+/-0.7mil			0.5oz	R-5775K 0.200mm H/H 42.5"49"(3313*2)(RTF)
L3				R-5670K 1080 RC64%
L4			0.5oz	R-5670K 3313 RC54%
				R-5670K 1080 RC64%
6.9+/-1.5mil			0.5oz	R-5775K 0.100mm H/H 42.5"49"(3313*1)(RTF)
L5				R-5670K 3313 RC54%
L6			0.5oz	R-5670K 1080 RC64%
				R-5670K 3313 RC54%
6.9+/-1.5mil			0.5oz	R-5775K 0.200mm H/H 42.5"49"(3313*2)(RTF)
L7				R-5670K 3313 RC54%
L8			0.5oz	R-5670K 1080 RC64%
				R-5670K 3313 RC54%
3.9+/-0.7mil			0.5oz	Foil 1/2oz(RTF)
L9				R-5670K 1080 RC64%
			0.5oz	R-5670K 1080 RC64%
6+/-0.9mil				R-5670K 1080 RC64%
SOLD			0.5oz	Foil 1/2oz(RTF)

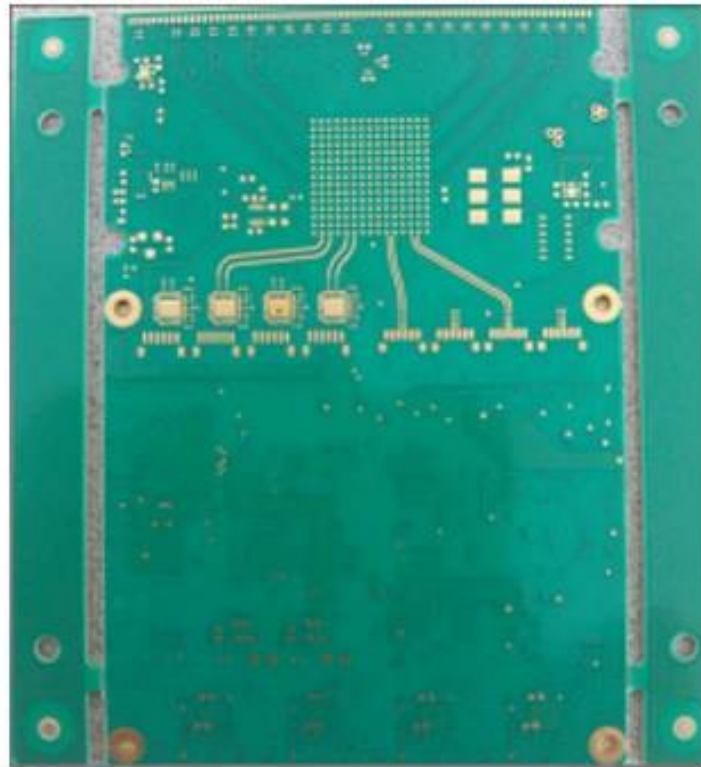

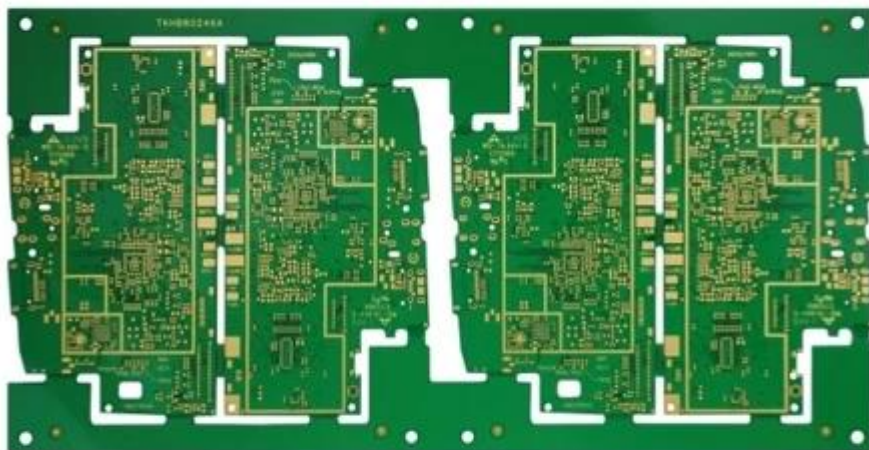

www.o-leading.com

[Quick turn pcb Printed circuit board, Pcb design in china, HDI pcb Printed circuit board](#)