

PCB Specifications

General Information

Material	FR-4 (Standard))	Thickness	0.50Z-50Z
Surface Finish	OSP / HASL	Plating Thickness	0.1-5mm
Drill Hole	0.2mm	Microvia	0.2mm
Plating	OSP / HASL	Microvia	0.1-5mm
Process	ISO9001 / UL / SGS	Q / Control	10PCS-100PCS
Weight	0.01kg -5kg	Quantity	10
PCBA	PCBA	Thickness	0.2mm
Price	\$ 0.1 - \$ 10		
design			0.01m3-10m3

Lead Time & Delivery


Lead Time	16 days (oem)
Delivery	7-12days

Notes

16 Standard Specifications

Item	2014		2015 ~ 2016		2017 ~ 2018	
	Value 1	Value 2	Value 1	Value 2	Value 1	Value 2
Material	32	42	38	44	42	48
Thickness / Plating (µm)	50/50	40/45	40/45	40/40	35/40	35/35
Plating Thickness (µm)	0.15	0.10	0.15	0.10	0.15	0.10
PTH	14: 1	16: 1	16: 1	18: 1	18: 1	20: 1
N + C + N	4 + C + 4	5 + C + 5	5 + C + 5	6 + C + 6	5 + C + 5	6 + C + 6
Microvia	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6
Microvia	-	-	-	-	-	-
Microvia (µm)	50	40	40	30	40	30
Microvia (µm)	75	65	65	50	50	40
Microvia	-	-	-	-	-	-
Material	FR4 / Megtron / Nelco / Rogers / Heavy Copper / etc.					

0000000 00000000 00000	0000 000 -	0000 000 -	0000 000 -
000000 000000	HASL 000000 00 000000 0 ENIG 0 OSP 0 000000 0000000 0 000000 000000 0 000000 000000 00 00000000 00000 0 000000 00000 0 000000 000000 000000 000 0 000000 00000 00000 00000		

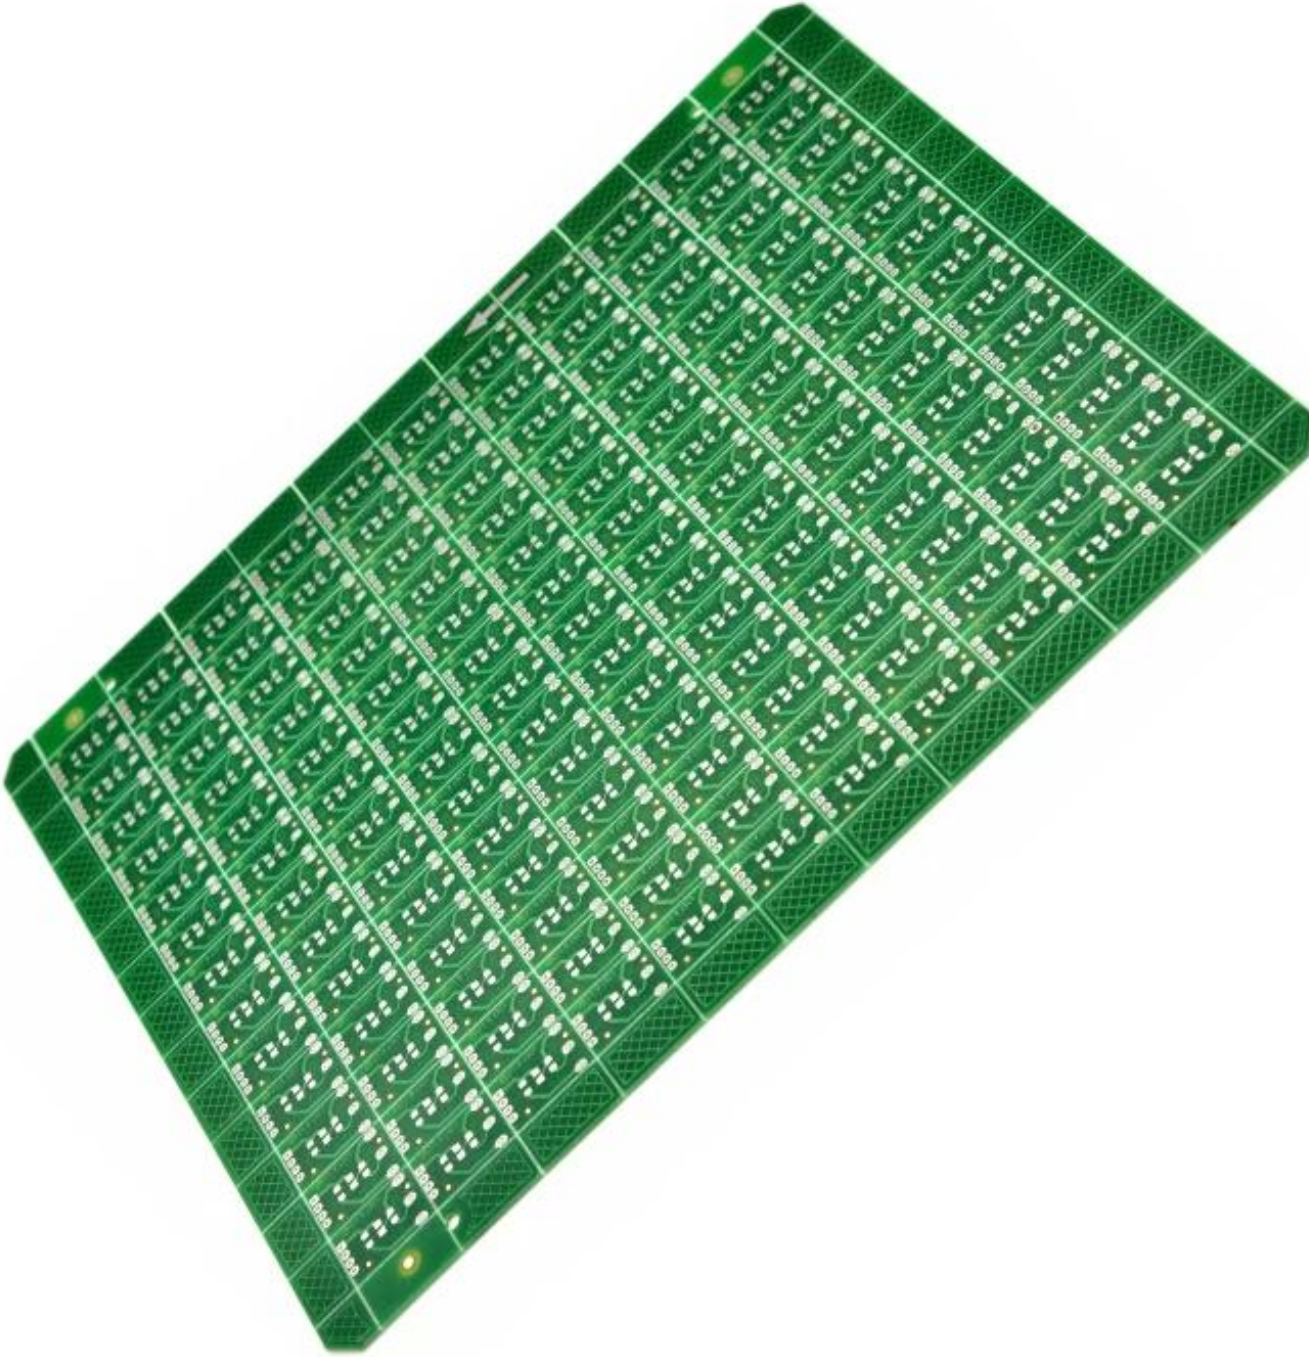

000000 000000 000000 00000000 000000 00000 00 0000000 0 PCB 0000000 000000000 00000000 0000000