

PCB 製造 専門 O-サービス

当社は O-Leading 企業向けに、高品質な PCB 製造サービスを提供。EMS による製造、組立、検査、梱包まで、お客様のニーズに合わせて提供。また、PCBA (PCB Assembly) の製造も承ります。お客様の要望に応じて、最適な製造方法をご提案いたします。

お客様の要望に応じて、最適な製造方法をご提案いたします。また、PCBA (PCB Assembly) の製造も承ります。お客様の要望に応じて、最適な製造方法をご提案いたします。

当社は、お客様の要望に応じて、最適な製造方法をご提案いたします。また、PCBA (PCB Assembly) の製造も承ります。お客様の要望に応じて、最適な製造方法をご提案いたします。


お問い合わせ: [SMT 製造](#) [PCBA 製造](#) [PCB 製造](#)

お問い合わせ

お問い合わせ:

H08R6x 製品は、高品質な PCB 製造サービスを提供。EMS による製造、組立、検査、梱包まで、お客様のニーズに合わせて提供。また、PCBA (PCB Assembly) の製造も承ります。お客様の要望に応じて、最適な製造方法をご提案いたします。

1. 製品は、高品質な PCB 製造サービスを提供。EMS による製造、組立、検査、梱包まで、お客様のニーズに合わせて提供。また、PCBA (PCB Assembly) の製造も承ります。お客様の要望に応じて、最適な製造方法をご提案いたします。

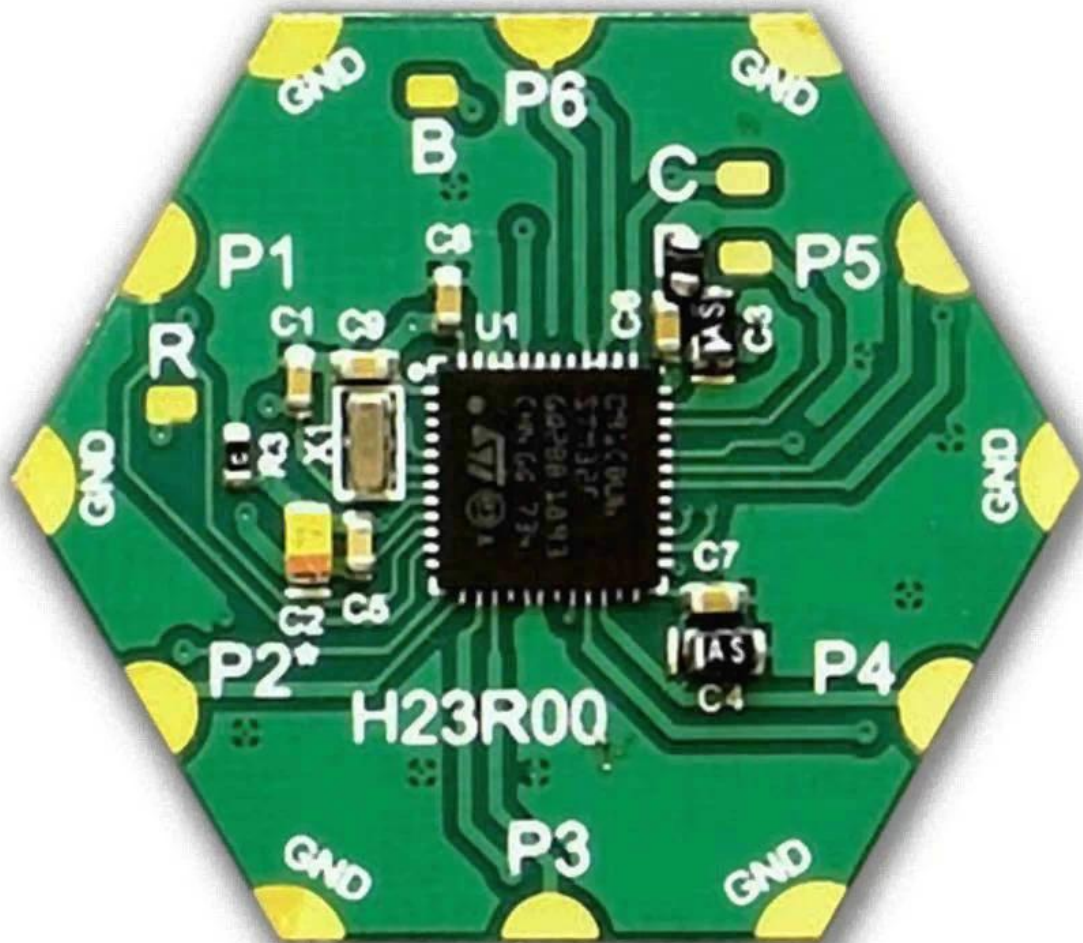

📌 重要資訊:

📌 重要資訊

- * 此模組僅供開發用途，請勿用於任何商業用途。
- * 此模組僅供開發用途，請勿用於任何商業用途。
- * 此模組僅供開發用途，請勿用於任何商業用途。
- * 此模組僅供開發用途，請勿用於任何商業用途。
- * 此模組僅供開發用途，請勿用於任何商業用途。
- * 此模組僅供開發用途，請勿用於任何商業用途。

📌 重要資訊


- * ST VL53L0X 模組僅供開發用途，請勿用於任何商業用途。
- * 此模組僅供開發用途，請勿用於任何商業用途。
- * 此模組僅供開發用途，請勿用於任何商業用途。
- * 此模組僅供開發用途，請勿用於任何商業用途。


📌 重要資訊

- * STM32F091CBU6 32 ARM Cortex-M0 MCU.
- * 8 pins.
- * 3.3 V (GND).
- * 6 pins xUART 2 xI2C SWD BOOT0 RESET.


Specifications	
MCU:	STM32F091CBU6
Frequency:	17.32 MHz 30 MHz
Voltage:	7.8 V
Current:	2 mA
Package:	QFN
Assembly:	ENIG (HASL-LF)



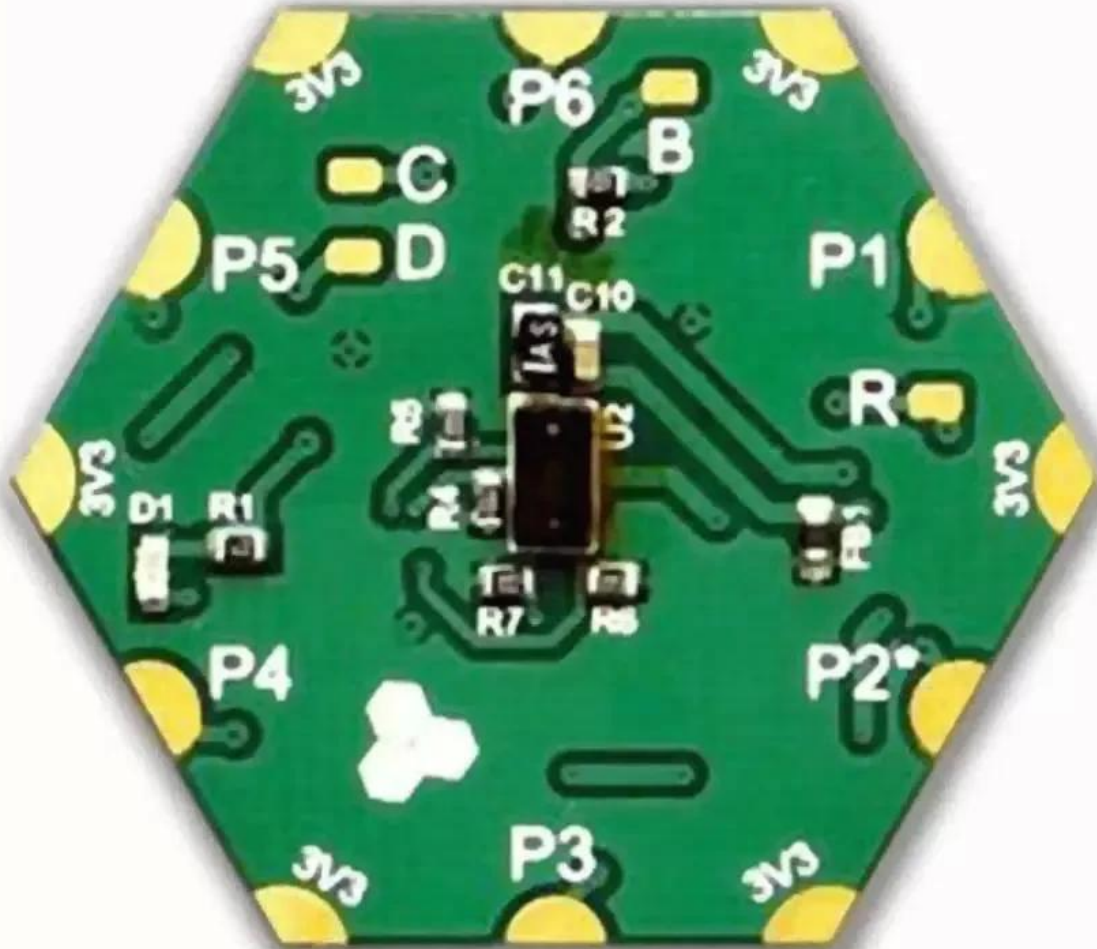

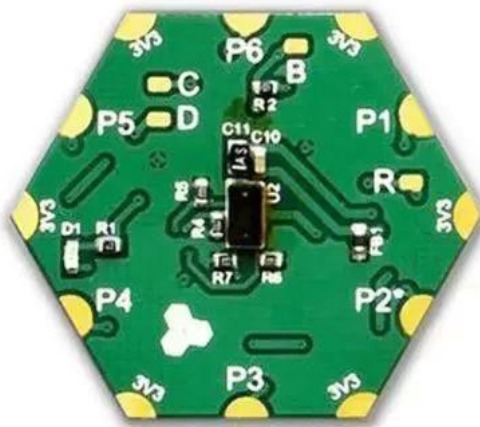

HEXABITZ QUICK START GUIDE


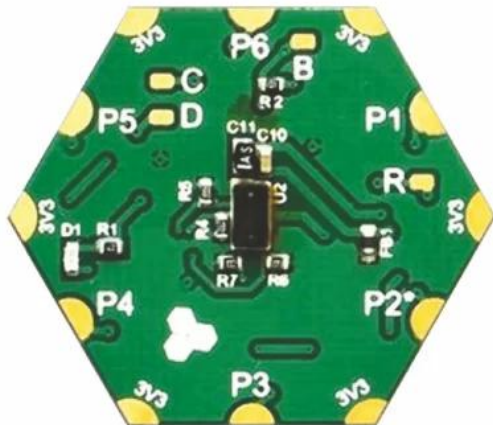



H08R6x Time-of-flight IR Sensor

link




Re-44-19

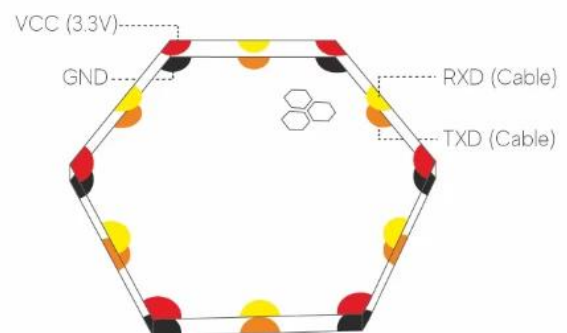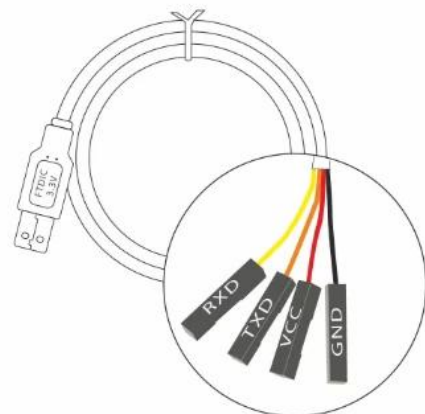


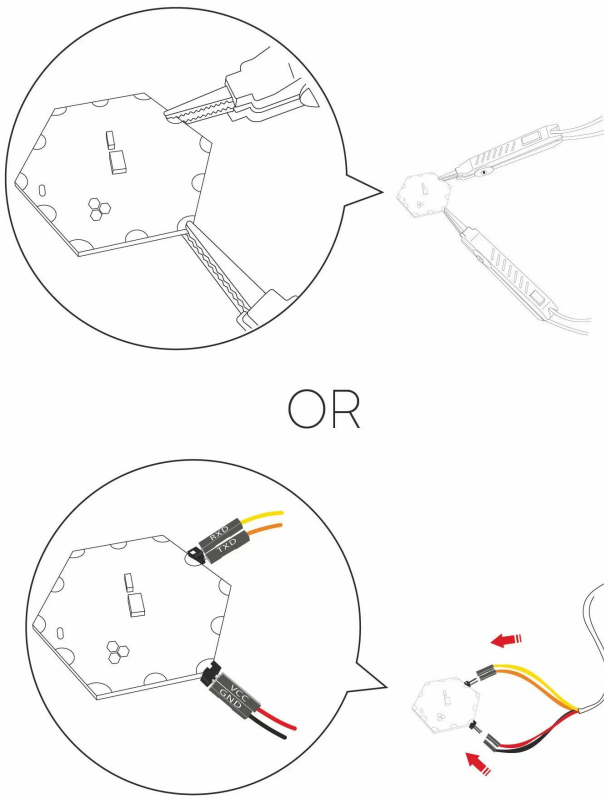

2

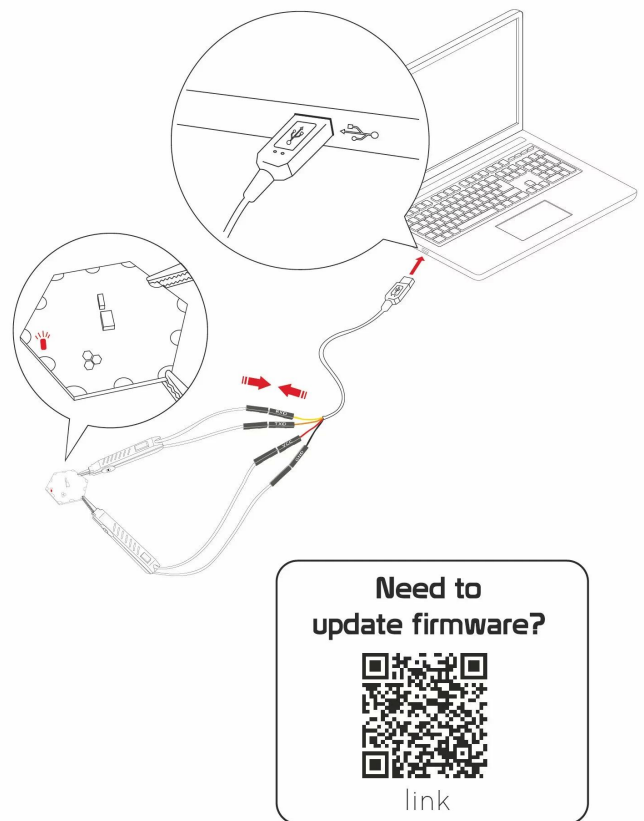

3

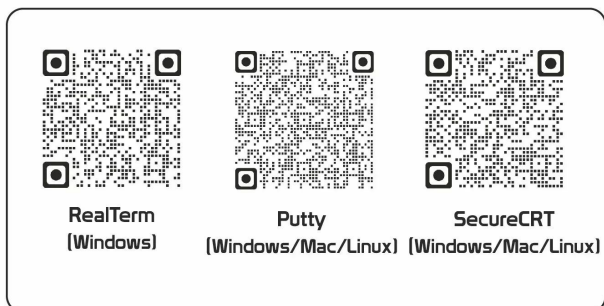

Use your favorite terminal software with these settings:

- Baudrate: 921600
- Display Format: Ansi
- Parity: none
- Data Bits: 8
- Stop Bit: 1
- Hardware Flow Control: none

Open the virtual COM port and hit the ENTER key.
Module will respond with a welcome message.

4



Try some CLI commands:

» ping

» sample

Distance (mm): 120

» units cm

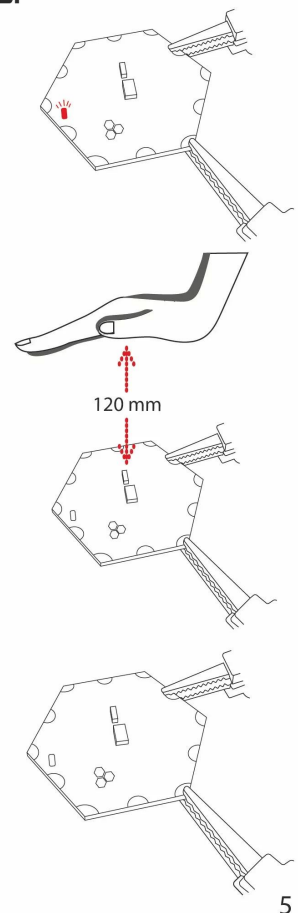



5

» stream 500 inf


Distance (cm): 20.2

Distance (cm): 20.7

Distance (cm): 24.5

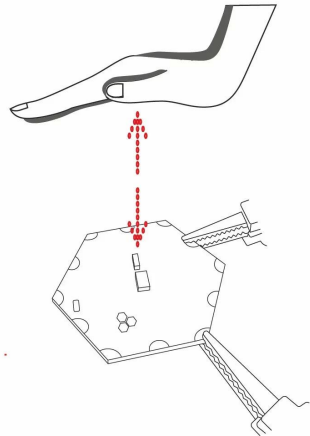

» stop (or ENTER key)



6

Type » help for more CLI commands.

Check module documentation, schematics, firmware and design files in the Resources tab.



Resources



Related Projects

7



فريقنا



Factory PCB



Automatic vacuum press machine



Drilling Machine



Pattern Plating Machine



Scrubbing Machine



Developing Machine



Routing Machine



High-speed flying probe machine



E-test Machine

Factory SMT





الشهادات





Test Report

No. SZXEC1900530401

Date: 30 Mar 2019

Page 1 of 6

O-LEADING SUPPLY CHAIN (HK) CO., LIMITED

1313.FLOOR 13, FORTUNE BUILDING, DANSHUI TOWN, HUIYANG DISTRICT, HUIZHOU, GUANGDONG, CHINA

The following sample(s) was/were submitted and identified on behalf of the clients as : OSP

SGS Job No. : RP19-005089 - SZ

Date of Sample Received : 22 Mar 2019

Testing Period : 22 Mar 2019 - 30 Mar 2019

Test Requested : Selected test(s) as requested by client.

Test Method : Please refer to next page(s).

Test Results : Please refer to next page(s).

Conclusion : Based on the performed tests on submitted sample(s), the results of Lead, Mercury, Cadmium, Hexavalent chromium, Polybrominated biphenyls (PBBs), Polybrominated diphenyl ethers (PBDEs) and Phthalates such as Bis(2-ethylhexyl) phthalate (DEHP) , Butyl benzyl phthalate (BBP), Dibutyl phthalate (DBP) , and Diisobutyl phthalate (DIBP) comply with the limits as set by RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU.

Signed for and on behalf of
SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Tina

Tina Fan
Approved Signatory



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/terms-and-conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/terms-and-conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions. If any, the Company's sole responsibility is to the Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

www.sgs.com/terms-and-conditions
SGS (Shenzhen) Standards Technical Services Co., Ltd. (hereinafter "SGS") is a member of the SGS Group (SGS SA).
中國·深圳·支那區新區中區430年工業區4樓405室 郵政編碼: 518129 電話: 755-25328888 傳真: 755-83106190 電子郵件: sgs.china@sgs.com

Member of the SGS Group (SGS SA)



Test Report

No. SZXEC1900530401

Date: 30 Mar 2019

Page 2 of 6

Test Results :

Test Part Description :

Specimen No.	SGS Sample ID	Description
SN1	SZX19-005304.001	Green"PCB"

Remarks :

- (1) 1 mg/kg = 1 ppm = 0.0001%
- (2) MDL = Method Detection Limit
- (3) ND = Not Detected (< MDL)
- (4) "-" = Not Regulated

RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU

Test Method : With reference to IEC 62321-4:2013+A1:2017, IEC 62321-5:2013, IEC 62321-7-2:2017, IEC 62321-6:2015 and IEC 62321-8:2017, analyzed by ICP-OES, UV-Vis and GC-MS.

Test item(s)	Limit	Unit	MDL	Q/Z
Cadmium (Cd)	100	mg/kg	2	ND
Lead (Pb)	1,000	mg/kg	2	8
Mercury (Hg)	1,000	mg/kg	2	ND
Hexavalent Chromium (Cr(VI))	1,000	mg/kg	8	ND
Sum of PBBs	1,000	mg/kg	-	ND
Monobromobiphenyl	-	mg/kg	5	ND
Dibromobiphenyl	-	mg/kg	5	ND
Tribromobiphenyl	-	mg/kg	5	ND
Tetrabromobiphenyl	-	mg/kg	5	ND
Pentabromobiphenyl	-	mg/kg	5	ND
Hexabromobiphenyl	-	mg/kg	5	ND
Heptabromobiphenyl	-	mg/kg	5	ND
Octabromobiphenyl	-	mg/kg	5	ND
Nonabromobiphenyl	-	mg/kg	5	ND
Decabromobiphenyl	-	mg/kg	5	ND
Sum of PBDEs	1,000	mg/kg	-	ND
Monobromodiphenyl ether	-	mg/kg	5	ND
Dibromodiphenyl ether	-	mg/kg	5	ND
Tribromodiphenyl ether	-	mg/kg	5	ND
Tetrabromodiphenyl ether	-	mg/kg	5	ND
Pentabromodiphenyl ether	-	mg/kg	5	ND



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/terms-and-conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/terms-and-conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions. If any, the Company's sole responsibility is to the Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

www.sgs.com/terms-and-conditions
SGS (Shenzhen) Standards Technical Services Co., Ltd. (hereinafter "SGS") is a member of the SGS Group (SGS SA).
中國·深圳·支那區新區中區430年工業區4樓405室 郵政編碼: 518129 電話: 755-25328888 傳真: 755-83106190 電子郵件: sgs.china@sgs.com

Member of the SGS Group (SGS SA)



ZPMV2.E490354 - WIRING, PRINTED - COMPONENT

Wiring, Printed - Component

See General Information for Wiring, Printed - Component

O-LEADING SUPPLY CHAIN (HK) CO LTD

E490354

ROOM 1205, 12/F
TAI SANG BANK BLDG
130-132 DES VOEUS ROAD
CENTRAL, HONG KONG

Type	Cond Width		Cond Thk mic(mil)	SS/ DS/ DSO	Max		Max		Meets UL796	C T	
	Min	Min			Area	Solder	Oper	Flame			
	mm(in)	mm(in)			Diam	Limits	Temp	Class			
Multilayer (mass laminate) printed wiring boards.											
O-LEADING-401	0.1 (0.004)	0.3 (0.012)	34 (1.34)	DS	12.7 (0.5)	260	10	130	V-0	-	-
O-LEADING-407	0.08 (0.003)	0.2 (0.008)	17 (0.67)	DS	9.7 (0.4)	260	10	130	V-0	All	-
Multilayer printed wiring boards.											
O-LEADING-408	0.125 (0.005)	0.125 (0.005)	12 (0.47) Int:136	DS	50.8 (2.0)	280	20	130	V-0	All	*
Single layer printed wiring boards.											
O-LEADING-002	0.38 (0.015)	1.14 (0.045)	34 (1.34)	SS	19.1 (0.8)	260	10	105	V-0	All	-
O-LEADING-003	0.38 (0.015)	1.14 (0.045)	34 (1.34)	SS	19.1 (0.8)	260	10	130	V-0	▲	-
O-LEADING-033	0.15 (0.006)	0.3 (0.012)	34 (1.34)	SS	25.4 (1.0)	260	10	120	V-0	All	-
O-LEADING-205	0.1 (0.004)	0.3 (0.012)	34 (1.34)	DS	69.6 (2.7)	260	10	130	V-0	All	-
O-LEADING-206	0.15 (0.006)	0.33 (0.013)	17 (0.67)	DS	69.6 (2.7)	260	10	130	V-0	All	-
O-LEADING-D01	0.14 (0.006)	0.15 (0.006)	33 (1.30)	DS	25.4 (1.0)	260	10	130	V-0	All	*
O-LEADING-S01	0.25 (0.010)	0.25 (0.010)	17 (0.67)	SS	25.4 (1.0)	260	4	130	V-0	All	*

WIRING, PRINTED - COMPONENT | UL Product iQ

O-LEADING-S02	0.2 (0.008)	0.2 (0.008)	17 (0.67)	SS	25.4 (1.0)	260	4	130	HB	▲
O-LEADING-S03	0.25 (0.010)	0.25 (0.010)	34 (1.34)	SS	25.4 (1.0)	260	4	130	V-0	All

* - CTI marking is optional and may be marked on the printed wiring board.

Marking: Company name or file number and type designation. May be followed by a suffix to denote factory identification or burning test classification.

并不是所有出现在本数据库中的公司名称和产品都满足了UL 跟踪检验服务的要求。只有带有 UL 标志的产品，才应该被视为经过UL认证，并满足UL 跟踪检验服务的要求。注意查看产品上的标志。

UL 允许在线认证目录中所含材料的复制遵循以下条件：1.指南信息、装配、构造、设计、系统和/或认证（文件）必须在不篡改任何数据（或图纸）的情况下完整且无误导性地呈现。2.“经 UL 允许从在线认证目录转载”声明必须出现在所摘取材料的邻近位置。此外，转载材料必须包含以下格式的版权声明：“© 2019 UL LLC”

القدرة العملية

PCB 板厚	1.0mm 32- 36mm
PCB 板厚公差	1 / 3oz-12oz
PCB 板厚公差 / 板厚公差公差	3.0mm 3.0 / 3mm
PCB 板厚公差 / 板厚公差公差	4.0mm 4.0 / 3mm
PCB 板厚公差公差	10: 1
PCB 板厚公差	0.2mm 5.0 - 3mm
PCB 板厚公差 (板厚公差公差)	635 * 1500mm
PCB 板厚公差公差	4mm
PCB 板厚公差 Plated	+/- 3mm
Blind / Buried Vias (板厚公差 AII)	3mm
PCB 板厚公差公差 (板厚公差公差)	3mm
PCB 板厚公差	FR-4 或 FR-4hg Tg. 板厚公差公差 或 Rogers 或 板厚公差公差 或 板厚公差公差 板厚公差公差 板厚公差公差
PCB 板厚公差公差	HASL 或 OSP 或 ENIG 或 HAL-LF 或 Immersion silver 板厚公差公差 或 板厚公差公差 或 板厚公差公差

□□□□ □□□□ SMT

[illegible]

التعبئة والتغليف والتسليم

Shipping service



Quick Turn Lead Time		
Layer Count:	Lead Tim	Special Requirement
1L/2L	2-3days	24 Hours,48 Hours
4L	3-4days	48 Hours
6L	4-5days	72 Hours
8L	5-6days	NA
10L	6-7days	NA
12L	7-8days	NA
14L	8-9days	NA

Standard Lead Time		
Layer Count:	Sample Lead Time	Volume order lead time
2L	4 days	10 days
4L	5 days	11 days
6L	6 days	12 days
8L	8 days	14 days
10L	10 days	16 days
12L	12 days	18 days
14L	14 days	20 days
16-32L	18 days	24 days

التعليمات

1. اختبار فحص O-Leading

.اختبار فحص O-Leading هو اختبار فحص الجودة الذي يتم إجراؤه على المنتجات الإلكترونية.

اختبار فحص O-Leading هو اختبار فحص الجودة الذي يتم إجراؤه على المنتجات الإلكترونية 1.1 ISO 9001: 2008.

1.2 اختبار فحص O-Leading هو اختبار فحص الجودة الذي يتم إجراؤه على المنتجات الإلكترونية.

اختبار فحص O-Leading هو اختبار فحص الجودة الذي يتم إجراؤه على المنتجات الإلكترونية 1.3 AOI

(.اختبار فحص O-Leading هو اختبار فحص الجودة الذي يتم إجراؤه على المنتجات الإلكترونية)

اختبار فحص O-Leading هو اختبار فحص الجودة الذي يتم إجراؤه على المنتجات الإلكترونية 1.4

اختبار فحص O-Leading هو اختبار فحص الجودة الذي يتم إجراؤه على المنتجات الإلكترونية 1.5

2 O-Leading اختبار فحص O-Leading

اختبار فحص O-Leading هو اختبار فحص الجودة الذي يتم إجراؤه على المنتجات الإلكترونية

.اختبار فحص O-Leading هو اختبار فحص الجودة الذي يتم إجراؤه على المنتجات الإلكترونية 31

.اختبار فحص O-Leading هو اختبار فحص الجودة الذي يتم إجراؤه على المنتجات الإلكترونية

اختبار فحص O-Leading هو اختبار فحص الجودة الذي يتم إجراؤه على المنتجات الإلكترونية

.اختبار فحص O-Leading هو اختبار فحص الجودة الذي يتم إجراؤه على المنتجات الإلكترونية

اختبار فحص O-Leading هو اختبار فحص الجودة الذي يتم إجراؤه على المنتجات الإلكترونية

.اختبار فحص O-Leading

03 O-Leading

FR4 PCB TG Rogers Arlon Telfon / PI .

04

4.1 4.2 PCB Gerber.

4.3 PCB PCBA.

4.4 .

4.5

05

AOI PTH E / T

06 HDI

VCP LDI

LDI Screen Hitachi

07

ENIG OSP LF-HASL BGA PAD 0.3

08 FPC O-Leading SMT

8 2000mm * 240mm "Flex Flexability" SMT

09

10 PCB PWB FPC

PWB Wire Wire Board FPC

11 PCB

Tg CTE 250

.000000 000 00000 50 0000

000 00000 000000 / 000000 00000 000 0000 0000000 000 0 00000000000 0000000 000 0000000 0 000 000000
00000000 0000000000 0000000000 000000000 00000000 00000000 0 0000000 00000 0000000 000000 00000000 000000
0000000 0000000 00000000 000000 000000 00000000 0000000 0000000 000000 00000000 000000
.00000000

0000000 000000 000000000 000000 000000 00 00 **.12 ridid-flex** 0000000

000000 PCB 00 0000000 000000 O-00 00 00000000 00000000 FPC 0 PCB 0 0000000000 0000 00 0000000000 00000 00000
0 0000000 0000000000 00000000 000000 00 000000 00 00000 0 0000 000000 000000 000000 00000 000000000 0000
.00000000 00000000 00000000 0000 00000000

00000000000 000000 00000 0000 **.13**

0000000000 000000 0000 00000000000 0000000000 00 00000000 00000 000000 0000 0 SI6000 soft 00000000 CITS 500s 00
POLAR INSTRUMENTS.

0000000000 000000 00000 00000000 00000000 00000 0000000000 00000000 000000 000000 00000000 0000000 00000.