

# Popis výrobku

## 8 " Kiosk pro rozpoznávání obličeje a měření teploty

Model: KMT-0080U-3CAW

8 " Kiosk pro rozpoznávání obličeje a měření teploty Pravidelné informace	
Pracovní vlhkost	0 □ 90% relativní vlhkost, bez kondenzace
Solný sprej	Úroveň Rp6 nebo vyšší
Antistatická vlastnost	Kontakt ± 6KV, vzduch ± 8KV
Napájení	DC12V / 2A, 20 W (MAX)
Sloupová clona	36 mm
Velikost zařízení	252 (L) * 136 (W) * 26 (T) mm
Velikost obrazovky	8 palců IPS HD obrazovka
Hmotnost	1,7 kg
Režimy balení	Baleno ve třech kartonech
Místo původu	Čína

**Podrobné obrázky:**

[Teplota poplachu bez dotykové horečky](#)

# 8" Facial Recognition and Temperature Measurement Kiosk



IP 65 waterproof  
& dustproof




Infrared temperature  
measurement



Alarming  
system



Linux  
Operating system



Accurate face  
recognition



Large-capacity  
face database

# Contactless Infrared temperature detection



Temperature tolerance:  $\pm 0.3^{\circ}\text{C}$

Temperature measurement range:  $16^{\circ}\text{C} - 40^{\circ}\text{C}$


Detection distance:  $\leq 30\text{cm}$

## Rapid face Recognition: less than 1s

8-inch IPS full-view high-definition display, no image smearing, no delay.

Automatic gain, automatic white balance, make the true color of the image naturally restore.

Built-in black level sensor for video surveillance, low-light recognition is more accurate.

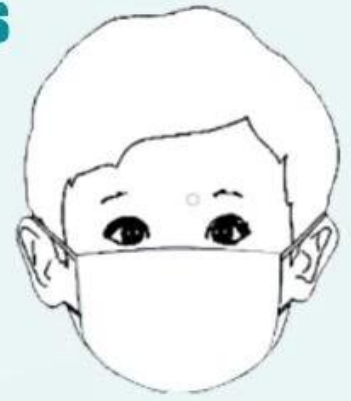




1s

**large storage capacity to meet places  
with large traffic.**

**24,000 face database**

Support 24000+ face comparison data and 160,000 recognition records.



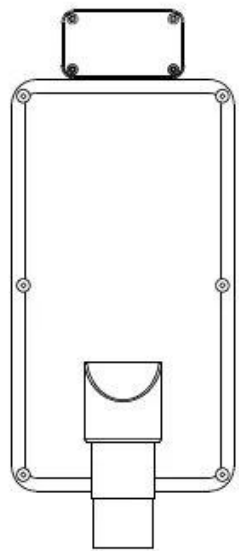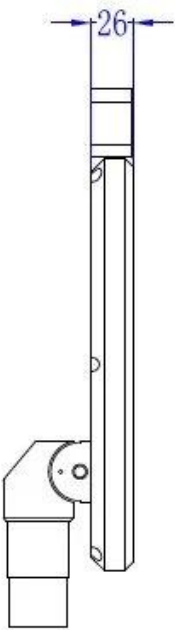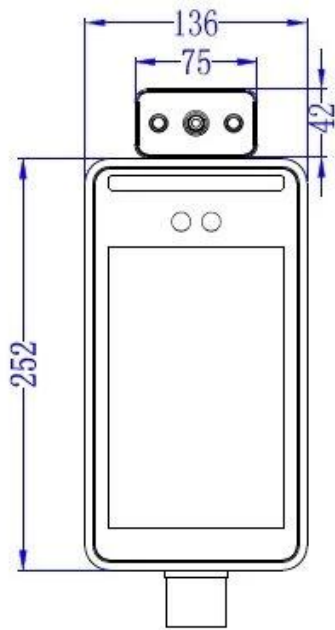

# Alarm system for temperature measurement and entry management



Normal temperature: pass

abnormal temperature: can't pass



- Stranger
- Temperature measurement
- No entry



Infrared temperature detection module

Binocular wide dynamic camera



Speaker

60cm/100cm pillar for your option.

2USB



# Flexible installation

Desktop



turnstile



wall mounted



Tripod



Pillar



# Application

Bus, supermarket, school, government, hospital, factory




## customized multiple interfaces



**Podrobné obrázky**





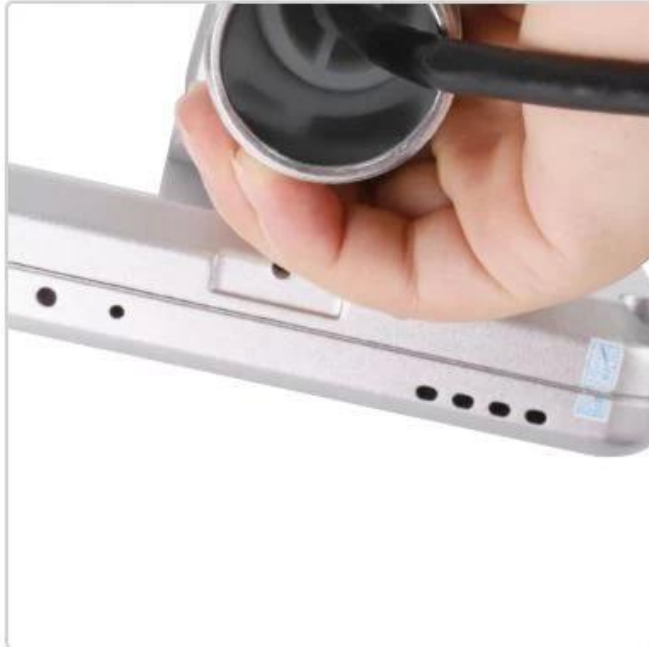













Model	KMT-0080U-3CAW
<b>Hardware</b>	
Processor	Dual Core Processor+ 1G memory + 16G flash
Operating system	Linux Operating system
Storage	Support TF card storage
Viewing angle	Vertical viewing angle: 30°; Horizontal viewing angle: 30°
Sensor	1/2.8" Progressive Scan CMOS(IMX307)
Lens	6mm
Communication	Support 4G \ WIFI \ bluetooth ; can be customized
Speaker	voice playback content can be customized
Temperature measurement performance	Please find the notes on last page
Measurement range	16℃ - 40℃ (Indoor without wind)
Temperature measurement	European original lens
Sensors type	Medical grade European imported sensors
Measurement accuracy	±0.3℃
Temperature resolution	0.1℃
Temperature detection distance	≤30cm
Measurement response time	300ms
<b>Performance</b>	
Recognition	1.2~2.2 meters, angle adjustable
Recognition distance	0.3~1.5 meters, depends on lens
Recognition time	<0.5s
Storage capacity	160,000 capture records
Face capacity	24000pcs
Screen brightness	≥400 cd/m2
<b>Interface</b>	
Switching output	1 way switch output, other GPIO port can be customized
Network interface	1 RJ45 10M / 100M adaptive Ethernet port, Gigabit Ethernet port can be customized
Wiegand interface	1 Wiegand interface input/output
Communication interface	1 RS485 interface
USB interface	1 USB interface
<b>Camera</b>	
Camera	Dual cameras, visible and near infrared, support live detection
Effective pixels	2MP, 1920*1080
Min Illumination	Color 0.01Lux @F1.2(ICR);B/W 0.001Lux @F1.2 (ICR)
SNR	≥50db(AGC OFF)
WDR	120db, ISP algorithm face partial exposure
<b>Function</b>	
Web side configuration	support
remote upgrade	support
LAN/ WAN	support
<b>Regular</b>	
Working humidity	0~90% relative humidity, no condensation
Salt spray	level Rp6 or above
Antistatic	contact ±6KV, air ±8KV
Power	DC12V/2A , 20W(MAX)
Column aperture	36mm
Equipment size	252(L) * 136 (W) * 26 (T) mm
Screen size	8 inches IPS HD screen
Weight	1.7 kg

# Balení a doprava

## Balení a dodání

Prodej jednotek	Jedna položka			
Velikost jednoho balení	25,3 x 14,5 x 14,5 cm			
Jedna hrubá hmotnost	1 500 kg			
<b>typ balíčku</b>				
box pro zobrazení	430 x 170 x 115 mm, hmotnost: 2,1 kg.			
karton k zobrazení	500 x 195 * 425 mm, 3ks na karton, G.W: 8,8 kg.			
Držák na kartony	305 x 51 x 290 mm, G.W: 0,3 kg.			
Velikost kartonu pro držák	327 * 340 * 317 mm, 6ks na karton, G.W: 18 kg.			
Velikost stojanu 0,6 m	630 x 132 x 124 mm, G.W: 0,3 kg.			
Velikost kartonu 0,6 m	650 x 280 x 260 mm, 4ks na karton, G.W: 15 kg.			
Velikost stojanu 1,1 m	1130 x 132 x 124 mm, G.W: 0,5 kg.			
Velikost kartonu 1,1 m	650 x 280 x 260 mm, 4ks na karton, G.W: 19,8 kg.			
<b>Dodací lhůta</b>				
Množství (ks)	1-100	101-500	501-1000	> 1000
Est. Čas (dny)	3	5	7	Bude vyjednáno

## FAQ

Q: Co mohu získat cenu?

Odpověď: Obvykle nabízíme do 24 hodin od obdržení vašeho dotazu. Pokud jste velmi naléhavě potřební získat cenu, sdělte nám to ve svém e-mailu, abychom váš dotaz považovali za prioritu.

Otázka: Jaký je váš obchodní dodací termín?

Odpověď: Přijímáme cílový port EXW, FOB Shenzhen nebo CIF. Můžete si vybrat ten, který je nejvhodnější nebo nákladově efektivní pro vás.

Otázka: A co čas na hromadnou výrobu?

A: Upřímně, záleží na množství objednávky a ročním období, kdy jste objednávku zadali. Ukázka objednávky je do 2 dnů. OEM / OEM objednávka bude potřebovat více času.