### **Produktbeschreibung**

#### 8 " Kiosk zur Gesichtserkennung und Temperaturmessung

Modell: KMT-0080U-3CAW

8 '' Kiosk zur Gesichtserkennung und Temperaturmessung Regelmäßige Infos				
Arbeitsfeuchtigkeit	0 🛮 90% relative Luftfeuchtigkeit, keine Kondensation			
Salz Spray	Level Rp6 oder höher			
Antistatische Eigenschaft	Kontakt ± 6 kV, Luft ± 8 kV			
Leistung	DC12V / 2A, 20 W (MAX)			
Säulenöffnung	36mm			
Gerätegröße	252 (L) * 136 (B) * 26 (T) mm			
Bildschirmgröße	8 Zoll IPS HD-Bildschirm			
Gewicht	1,7 kg			
Verpackungsarten	In drei Kartons verpackt			
Herkunftsort	China			

#### **Detaillierte Bilder:**

Berührungsfieber-Alarmtemperatur









Linux Operating system



Infrared temperature measurement



Accurate face recognition



Alarming system



Large-capacity face database




**Rapid face Recognition: less than 1s** 


8-inch IPS full-view high-definition display, no image smearing, no delay.


Automatic gain, automatic white balance, make the true color of the image naturally restore.

Built-in black level sensor for video surveillance, low-light recognition is more accurate.





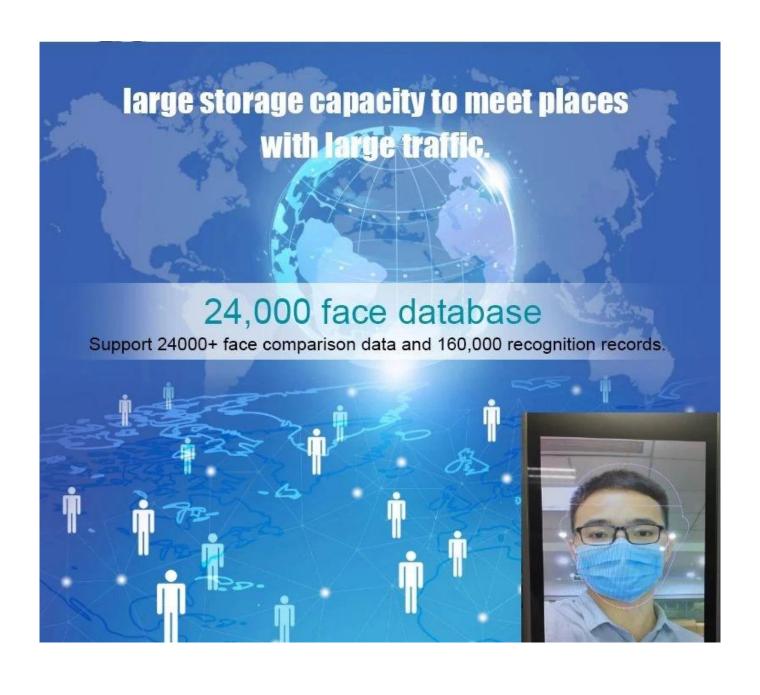

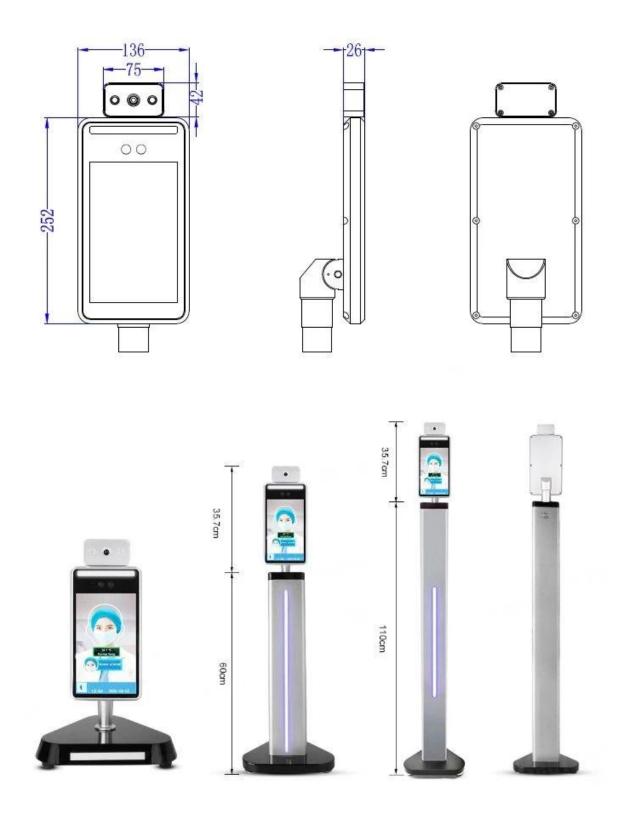


# Alarm system for temperature measurement and entry management



Normal temperature: pass

abnormal temperature: can't pass



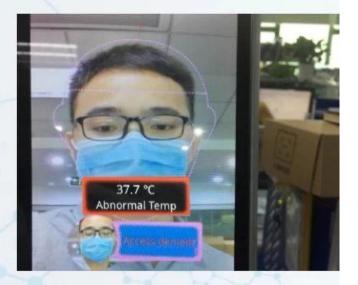


Stranger



No entry



### **Flexible installation**

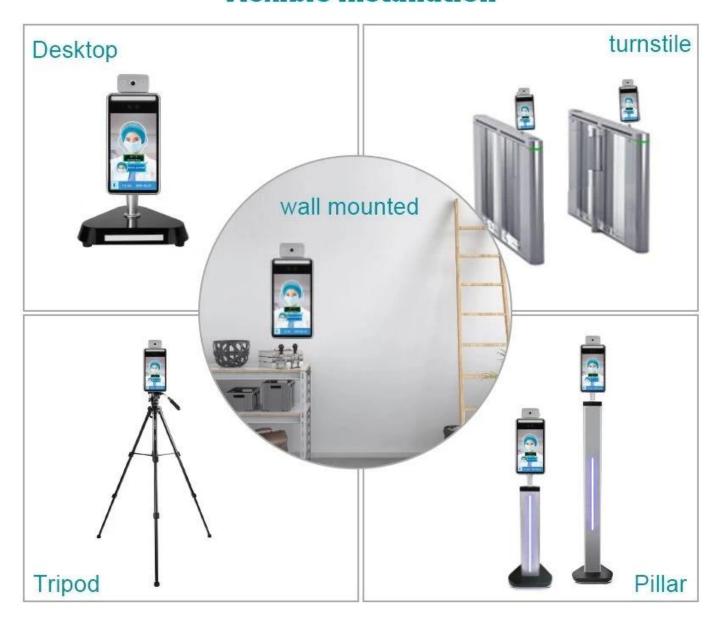

### **Application**

Bus, supermarket ,school, government, hospital, factory



## customized multiple interfaces





#### **Detaillierte Bilder**

















Model	KMT-0080U-3CAW		
Hardware	100 H109/PGA(H1 - 15-109/201)		
Processor	Dual Core Processor+ 1G memory + 16G flash		
Operating system	Linux Operating system		
Storage	Support TF card storage		
Viewing angle	Vertical viewing angle: 30°; Horizontal viewing angle: 30°		
Sensor	1/2.8" Progressive Scan CMOS(IMX307)		
Lens	6mm		
Communication	\$7550000		
Speaker	Support 4G \ WIFI \ bluetooth ; can be customized		
Temperature measurement	voice playback content can be customized		
performance	Please find the notes on last page		
Measurement range	16°C - 40°C (Indoor without wind)		
Temperature measurement	European original lens		
Sensors type	Medical grade European imported sensors		
Measurement accuracy	±0.3℃		
Temperature resolution	0.1℃		
Temperature detection distance	≤30cm		
Measurement response time	300ms		
Performance			
Recognition	1.2~2.2 meters, angle adjustable		
Recognition distance	0.3~1.5 meters, depends on lens		
Recognition time	<0.5s		
Storage capacity	160,000 capture records		
Face capacity	24000pcs		
Screen brightness	≥400 cd/m2		
Interface			
Switching output	1 way switch output, other GPIO port can be customized		
Network interface	1 RJ45 10M / 100M adaptive Ethernet port, Gigabit Ethernet port can be customized		
Wiegand interface	1 Wiegand interface input/output		
Communication interface	1 RS485 interface		
USB interface	1 USB interface		
Camera			
Camera	Dual cameras, visible and near infrared, support live detection		
Effective pixels	2MP, 1920*1080		
Min Illumination	Color 0.01Lux @F1.2(CR);B/W 0.001Lux @F1.2 (ICR)		
SNR	≥50db(AGC OFF)		
WDR	120db, ISP algorithm face partial exposure		
Function			
Web side configuration	support		
remote upgrade	support		
LAN/ WAN	support		
Regular			
Working humidity	$0{\sim}90\%$ relative humidity, no condensation		
Salt spray	level Rp6 or above		
Antistatic	contact ±6KV, air ±8KV		
Power	DC12V/2A , 20W(MAX)		
Column aperture	36mm		
Equipment size	252(L) * 136 (W) * 26 (T) mm		
Screen size	8 inches IPS HD screen		
Weight	1.7 kg		

### **Verpackung & Versand**

#### Verpackung & Lieferung

Einheiten verkaufen				Einzelexemplar			
Einzelpackungsgröße				25,3 x 14,5 x 14,5 cm			
Einzelbruttogewicht				1.500 kg			
Pakettyp							
Feld für die Anzeige				430 * 170 * 115 mm, Gewicht: 2,1 kg.			
Karton zur Anzeige				500 * 195 * 425 mm, 3 Stück pro Karton, GW: 8,8 kg.			
Kartonhalterung				305 * 51 * 290 mm, GW: 0,3 kg.			
Kartongröße für Halterung				327 * 340 * 317 mm, 6 Stück pro Karton, GW: 18 kg.			
0,6 m Standboxgröße				630 * 132 * 124 mm, GW: 0,3 kg.			
0,6 m Standkartongröße				650 * 280 * 260 mm, 4 Stück pro Karton, GW: 15 kg.			
1,1 m Standgröße				1130 * 132 * 124 mm, GW: 0,5 kg.			
1,1 m Standkartongröße				650 * 280 * 260 mm, 4 Stück pro Karton, GW: 19,8 kg.			
Vorlaufzeit							
Menge (Stück)	1-100	101-500	501-1000	> 1000			
Europäische Sommerzeit. Zeit (Tage)	3	5	7	Verhandelt werden			

#### **FAQ**

Q.: Was kann ich den Preis bekommen?

A: Wir zitieren normalerweise innerhalb von 24 Stunden, nachdem wir Ihre Anfrage erhalten haben. Wenn Sie dringend den Preis erhalten möchten, teilen Sie uns dies bitte in Ihrer E-Mail mit, damit wir Ihre Anfrage als Priorität betrachten.

F: Was ist Ihre Handelslieferzeit?

A: Wir akzeptieren den Zielhafen EXW, FOB Shenzhen oder CIF. Sie können diejenige auswählen, die die istam bequemsten oder kostengünstigsten für Sie.

F: Was ist mit der Vorlaufzeit für die Massenproduktion?

A: Ehrlich gesagt hängt es von der Bestellmenge und der Jahreszeit ab, in der Sie die Bestellung aufgeben. Die Musterbestellung erfolgt innerhalb von 2 Tagen. OEM / OEM-Bestellungen benötigen zusätzliche Zeit.