

Produktbeschreibung

8 " Kiosk zur Gesichtserkennung und Temperaturmessung

Modell: KMT-0080U-3CAW

8 " Kiosk zur Gesichtserkennung und Temperaturmessung Regelmäßige Infos	
Arbeitsfeuchtigkeit	0 □ 90% relative Luftfeuchtigkeit, keine Kondensation
Salz Spray	Level Rp6 oder höher
Antistatische Eigenschaft	Kontakt ± 6 kV, Luft ± 8 kV
Leistung	DC12V / 2A, 20 W (MAX)
Säulenöffnung	36mm
Gerätegröße	252 (L) * 136 (B) * 26 (T) mm
Bildschirmgröße	8 Zoll IPS HD-Bildschirm
Gewicht	1,7 kg
Verpackungsarten	In drei Kartons verpackt
Herkunftsort	China

Detaillierte Bilder:

[Berührungsfieber-Alarmtemperatur](#)

8" Facial Recognition and Temperature Measurement Kiosk



IP 65 waterproof
& dustproof




Infrared temperature
measurement



Alarming
system



Linux
Operating system



Accurate face
recognition



Large-capacity
face database

Contactless Infrared temperature detection



Temperature tolerance: $\pm 0.3^{\circ}\text{C}$

Temperature measurement range: $16^{\circ}\text{C} - 40^{\circ}\text{C}$


Detection distance: $\leq 30\text{cm}$

Rapid face Recognition: less than 1s

8-inch IPS full-view high-definition display, no image smearing, no delay.

Automatic gain, automatic white balance, make the true color of the image naturally restore.

Built-in black level sensor for video surveillance, low-light recognition is more accurate.

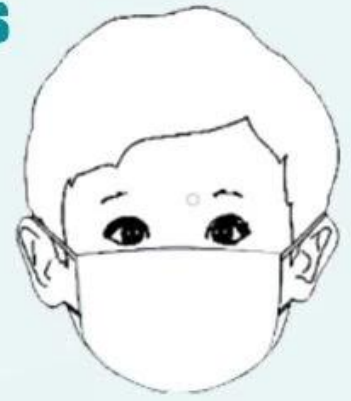






1s

**large storage capacity to meet places
with large traffic.**

24,000 face database

Support 24000+ face comparison data and 160,000 recognition records.



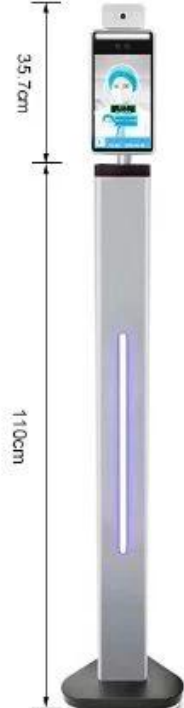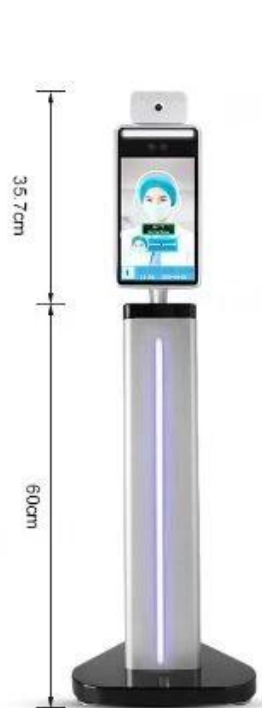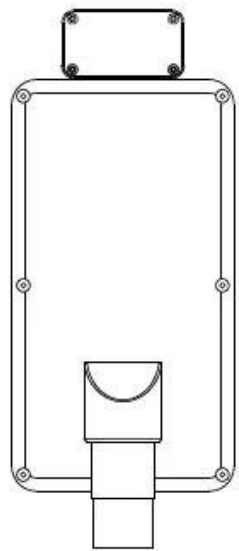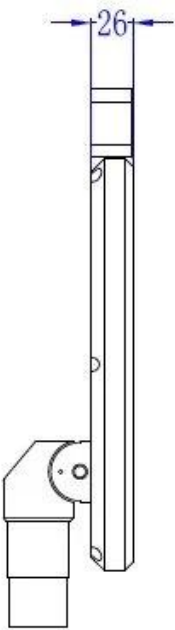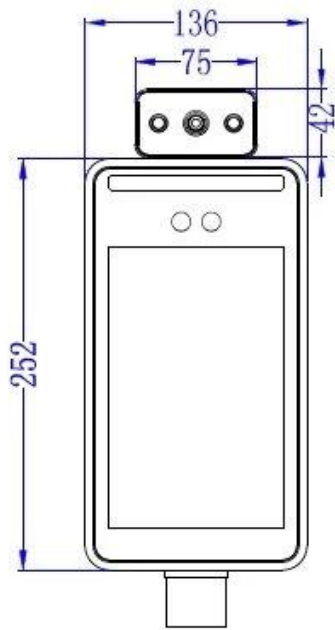

Alarm system for temperature measurement and entry management



Normal temperature: pass

abnormal temperature: can't pass



- Stranger
- Temperature measurement
- No entry



Infrared temperature detection module

Binocular wide dynamic camera



Speaker

60cm/100cm pillar for your option.

2USB

Flexible installation

Desktop



turnstile



wall mounted



Tripod



Pillar

Application

Bus, supermarket, school, government, hospital, factory



customized multiple interfaces



Detallierte Bilder

















Model	KMT-0080U-3CAW
Hardware	
Processor	Dual Core Processor+ 1G memory + 16G flash
Operating system	Linux Operating system
Storage	Support TF card storage
Viewing angle	Vertical viewing angle: 30°; Horizontal viewing angle: 30°
Sensor	1/2.8" Progressive Scan CMOS(IMX307)
Lens	6mm
Communication	Support 4G \ WIFI \ bluetooth ; can be customized
Speaker	voice playback content can be customized
Temperature measurement performance	Please find the notes on last page
Measurement range	16℃ - 40℃ (Indoor without wind)
Temperature measurement	European original lens
Sensors type	Medical grade European imported sensors
Measurement accuracy	±0.3℃
Temperature resolution	0.1℃
Temperature detection distance	≤30cm
Measurement response time	300ms
Performance	
Recognition	1.2~2.2 meters, angle adjustable
Recognition distance	0.3~1.5 meters, depends on lens
Recognition time	<0.5s
Storage capacity	160,000 capture records
Face capacity	24000pcs
Screen brightness	≥400 cd/m2
Interface	
Switching output	1 way switch output, other GPIO port can be customized
Network interface	1 RJ45 10M / 100M adaptive Ethernet port, Gigabit Ethernet port can be customized
Wiegand interface	1 Wiegand interface input/output
Communication interface	1 RS485 interface
USB interface	1 USB interface
Camera	
Camera	Dual cameras, visible and near infrared, support live detection
Effective pixels	2MP, 1920*1080
Min Illumination	Color 0.01Lux @F1.2(ICR);B/W 0.001Lux @F1.2 (ICR)
SNR	≥50db(AGC OFF)
WDR	120db, ISP algorithm face partial exposure
Function	
Web side configuration	support
remote upgrade	support
LAN/ WAN	support
Regular	
Working humidity	0~90% relative humidity, no condensation
Salt spray	level Rp6 or above
Antistatic	contact ±6KV, air ±8KV
Power	DC12V/2A , 20W(MAX)
Column aperture	36mm
Equipment size	252(L) * 136 (W) * 26 (T) mm
Screen size	8 inches IPS HD screen
Weight	1.7 kg

Verpackung & Versand

Verpackung & Lieferung

Einheiten verkaufen	Einzelexemplar			
Einzelpackungsgröße	25,3 x 14,5 x 14,5 cm			
Einzelbruttogewicht	1.500 kg			
Pakettyp				
Feld für die Anzeige	430 * 170 * 115 mm, Gewicht: 2,1 kg.			
Karton zur Anzeige	500 * 195 * 425 mm, 3 Stück pro Karton, GW: 8,8 kg.			
Kartonhalterung	305 * 51 * 290 mm, GW: 0,3 kg.			
Kartongröße für Halterung	327 * 340 * 317 mm, 6 Stück pro Karton, GW: 18 kg.			
0,6 m Standboxgröße	630 * 132 * 124 mm, GW: 0,3 kg.			
0,6 m Standkartongröße	650 * 280 * 260 mm, 4 Stück pro Karton, GW: 15 kg.			
1,1 m Standgröße	1130 * 132 * 124 mm, GW: 0,5 kg.			
1,1 m Standkartongröße	650 * 280 * 260 mm, 4 Stück pro Karton, GW: 19,8 kg.			
Vorlaufzeit				
Menge (Stück)	1-100	101-500	501-1000	> 1000
Europäische Sommerzeit. Zeit (Tage)	3	5	7	Verhandelt werden

FAQ

Q.: Was kann ich den Preis bekommen?

A: Wir zitieren normalerweise innerhalb von 24 Stunden, nachdem wir Ihre Anfrage erhalten haben. Wenn Sie dringend den Preis erhalten möchten, teilen Sie uns dies bitte in Ihrer E-Mail mit, damit wir

Ihre Anfrage als Priorität betrachten.

F: Was ist Ihre Handelslieferzeit?

A: Wir akzeptieren den Zielhafen EXW, FOB Shenzhen oder CIF. Sie können diejenige auswählen, die die istam bequemsten oder kostengünstigsten für Sie.

F: Was ist mit der Vorlaufzeit für die Massenproduktion?

A: Ehrlich gesagt hängt es von der Bestellmenge und der Jahreszeit ab, in der Sie die Bestellung aufgeben. Die Musterbestellung erfolgt innerhalb von 2 Tagen. OEM / OEM-Bestellungen benötigen zusätzliche Zeit.