


Copper Plate holes Minimum .025 AVG,. 020 min. Löcher dürfen nicht eingesteckt werden

Pack mit colorless transparent Bubble Film, 25 Stk/Tasche, Put desiccant in Flanke, Put feuchte Indikator-Karte auf der Oberseite

Layer-Struktur

Lyr	残制率(%)	Image	Foil	最终厚度	
COMP	69.7308		0.5oz	1.8336	
L2	83.0595		0.5oz	0.6	
					6.9893
L3	75.15		0.5oz	0.6	
L4	81.9895		0.5oz	0.6	
					6.9931
L5	76.856		0.5oz	0.6	
SOLD	77.924		0.5oz	1.8336	

O-LEADING
To Be Reliable, To Be Valuable

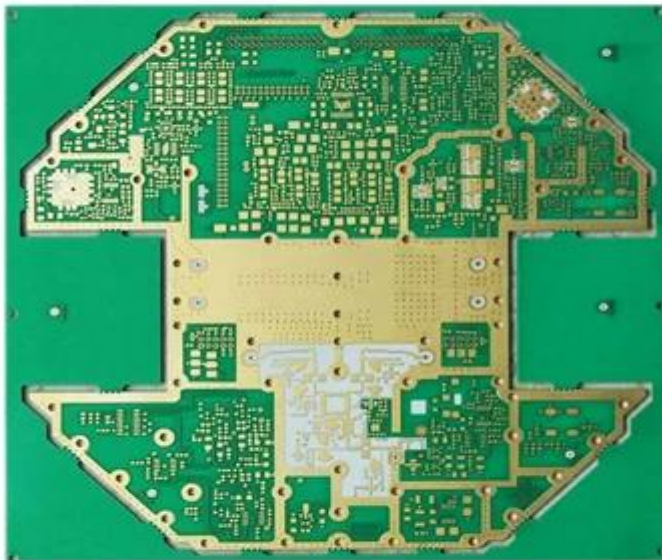

www.o-leading.com

Hochwertige PCB-Großhandel, Small Volume PCB-Hersteller