

# Tuotteen Kuvaus

## 8 "Kasvojen tunnistus ja lämpötilan mittaus Kioski

Malli: KMT-0080U-3CAW

8 "Kasvojen tunnistus ja lämpötilan mittaus Kioski Säännöllinen info	
Kosteus	0 ~ 90% suhteellinen kosteus, ei kondensaatiota
Suolapussi	Taso RP6 tai enemmän
Anti-staattinen omaisuus	Yhteystiedot $\pm 6$ kv, ilma $\pm 8$ kv
Teho	DC12V / 2A, 20W (max)
Sarakkeiden aukko	36mm
Laitteiden koko	252 (L) * 136 (W) * 26 (T) mm
Näytön koko	8 tuumaa IPS HD-näyttö
Paino	1,7 kg
Pakkaustilat	Pakattu kolmeen kartonkiin
Lähtöisin	Kiina

[Kasvojen lämpötilan mittaus kävele kasvojen tunnistuslämpötilan avulla](#)

**Yksityiskohtaiset kuvakkeet:**

# 8" Facial Recognition and Temperature Measurement Kiosk



IP 65 waterproof  
& dustproof




Infrared temperature  
measurement



Alarming  
system



Linux  
Operating system



Accurate face  
recognition



Large-capacity  
face database

# Contactless Infrared temperature detection



Temperature tolerance:  $\pm 0.3^{\circ}\text{C}$

Temperature measurement range:  $16^{\circ}\text{C} - 40^{\circ}\text{C}$

Detection distance:  $\leq 30\text{cm}$




## Rapid face Recognition: less than 1s

8-inch IPS full-view high-definition display, no image smearing, no delay.

Automatic gain, automatic white balance, make the true color of the image naturally restore.

Built-in black level sensor for video surveillance, low-light recognition is more accurate.

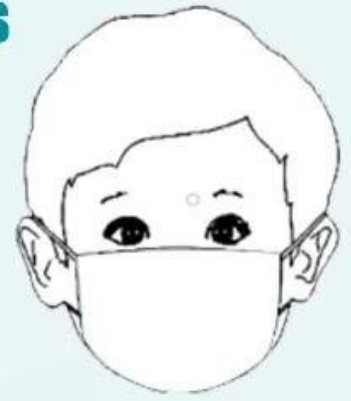






# 1s

**large storage capacity to meet places  
with large traffic.**

**24,000 face database**

Support 24000+ face comparison data and 160,000 recognition records.



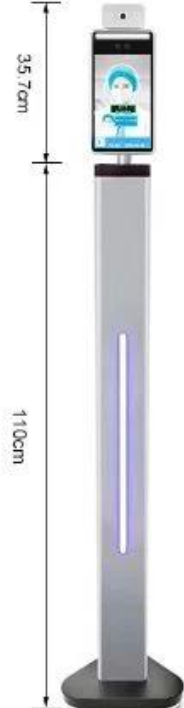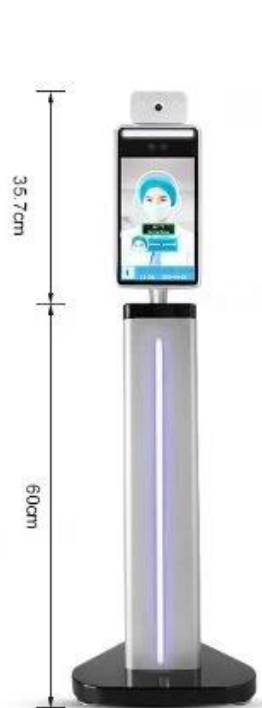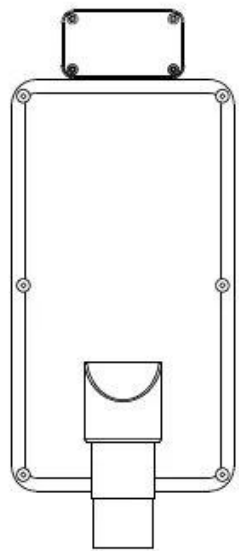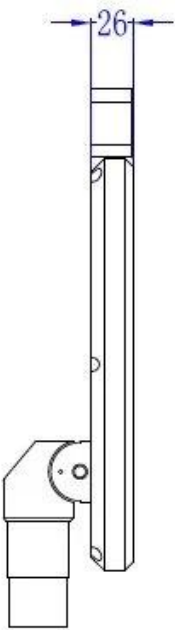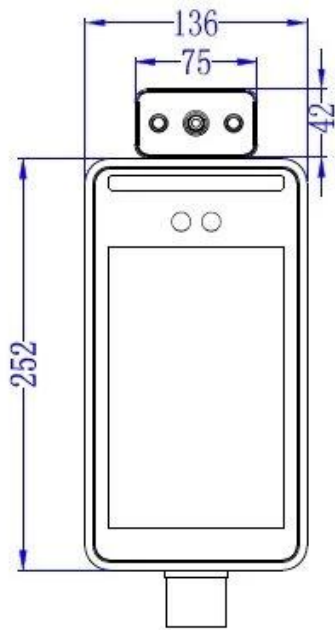



# Alarm system for temperature measurement and entry management



Normal temperature: pass

abnormal temperature: can't pass



- Stranger
- Temperature measurement
- No entry



Infrared temperature detection module

Binocular wide dynamic camera



Speaker

60cm/100cm pillar for your option.

2USB



# Flexible installation

Desktop



turnstile



wall mounted



Tripod



Pillar

# Application

Bus, supermarket, school, government, hospital, factory



## customized multiple interfaces



**Yksityiskohtaiset kuvat**





















Model	KMT-0080U-3CAW
<b>Hardware</b>	
Processor	Dual Core Processor+ 1G memory + 16G flash
Operating system	Linux Operating system
Storage	Support TF card storage
Viewing angle	Vertical viewing angle: 30°; Horizontal viewing angle: 30°
Sensor	1/2.8" Progressive Scan CMOS(IMX307)
Lens	6mm
Communication	Support 4G \ WIFI \ bluetooth ; can be customized
Speaker	voice playback content can be customized
Temperature measurement performance	Please find the notes on last page
Measurement range	16℃ - 40℃ (Indoor without wind)
Temperature measurement	European original lens
Sensors type	Medical grade European imported sensors
Measurement accuracy	±0.3℃
Temperature resolution	0.1℃
Temperature detection distance	≤30cm
Measurement response time	300ms
<b>Performance</b>	
Recognition	1.2~2.2 meters, angle adjustable
Recognition distance	0.3~1.5 meters, depends on lens
Recognition time	<0.5s
Storage capacity	160,000 capture records
Face capacity	24000pcs
Screen brightness	≥400 cd/m2
<b>Interface</b>	
Switching output	1 way switch output, other GPIO port can be customized
Network interface	1 RJ45 10M / 100M adaptive Ethernet port, Gigabit Ethernet port can be customized
Wiegand interface	1 Wiegand interface input/output
Communication interface	1 RS485 interface
USB interface	1 USB interface
<b>Camera</b>	
Camera	Dual cameras, visible and near infrared, support live detection
Effective pixels	2MP, 1920*1080
Min Illumination	Color 0.01Lux @F1.2(ICR);B/W 0.001Lux @F1.2 (ICR)
SNR	≥50db(AGC OFF)
WDR	120db, ISP algorithm face partial exposure
<b>Function</b>	
Web side configuration	support
remote upgrade	support
LAN/ WAN	support
<b>Regular</b>	
Working humidity	0~90% relative humidity, no condensation
Salt spray	level Rp6 or above
Antistatic	contact ±6KV, air ±8KV
Power	DC12V/2A , 20W(MAX)
Column aperture	36mm
Equipment size	252(L) * 136 (W) * 26 (T) mm
Screen size	8 inches IPS HD screen
Weight	1.7 kg



# Pakkaus ja toimitus

## Pakkaus ja toimitus

Myyntiyksiköt	Yksi tuote			
Yksittäinen pakkauksen koko	25,3x14,5x14,5 cm			
Yksi bruttopaino	1,500 kg			
<b>Pakkaustyyppi</b>				
Laatikko näytölle	430 * 170 * 115 mm, paino: 2.1kg.			
kartonki	500 * 195 * 425mm, 3PCS per kartonki, G.W: 8,8 kg.			
Bracket Carton Box	305 * 51 * 290mm, G.W: 0.3kg.			
Kartonki koko kannattimeen	327 * 340 * 317mm, 6kpl kartonki, G.W: 18kg.			
0.6m Stand Box Koko	630 * 132 * 124mm, G.W: 0.3kg.			
0.6m seisopakkakoko	650 * 280 * 260mm, 4kpl kartonki, G.W: 15kg.			
1.1m Stand koko	1130 * 132 * 124mm, G.W: 0.5kg.			
1.1m Stand pakkauskoko	650 * 280 * 260mm, 4kpl kartonki, G.W: 19.8kg.			
<b>Lyijyaika</b>				
Määrä (kappaleet)	1-100	101-500	501-1000	> 1000
Est. Aika (päivät)	3	5	7	Neuvotella

## FAQ

Q: Mitä voin saada hinnan?

V: Me yleensä lainata 24 tunnin kuluessa siitä, kun saamme kyselyn. Jos olet erittäin kiireellinen saadaksesi hinnan, kerro meille sähköpostissasi niin, että pidämme kyselysi ensisijaisesti.

K: Mikä on kaupankäynnin toimikausi?

V: Hyväksymme Exw, FOB Shenzhen tai CIF-kohdeportti. Voit valita sen, joka onkätevin tai kustannustehokas sinulle.

K: Entä massatuotannon lyijyaika?

V: Rehellisesti, se riippuu tilauksen määrästä ja kaudesta, jonka asetit tilauksen. Näytteen järjestys on 2 päivän kuluessa. OEM / OEM-tilaus tarvitsee lisääaikaa.

Ymmärrä enemmän:[\*\*Ei koskettaa kuume hälytyslämpötila tukku\*\*](#)