



FINISH: THIS BOARD SHALL BE IMMERSION GOLD PLATED ACCORDING TO IPC-6012.  
 THICKNESS SHALL BE .050uM OVER 3-6uM NICKEL.  
 COPPER PLATE HOLES MINIMUM .025 AVG, .020 MIN.. HOLES MAY NOT BE PLUGGED

Pack with colorless transparent bubble film ,25 PCS/ bag, put desiccant in flank, put humidity indicator card on top side

Layer structure

Lyr	残铜率(%)	Image	Foil	最终厚度	Ilame
COMP	91.2163		0.5oz	2.1748	RO4350B 0.510mm H/H
L2	91.2163		0.5oz	0.6	IT180A 2116 RC56% ①
				9.56966	IT180A 2116 RC56% ②
L3	87.06		0.5oz	0.6	IT180A 0.800mm H/H 41*43"
L4	0			9.7	IT180A 2116 RC56% ①
					IT180A 2116 RC56% ②
L5	0		0.5oz	2.1748	IT180A 0.510mm H/H 41*43"
SOLD	96.96				

**O-LEADING**  
 To Be Reliable, To Be Valuable

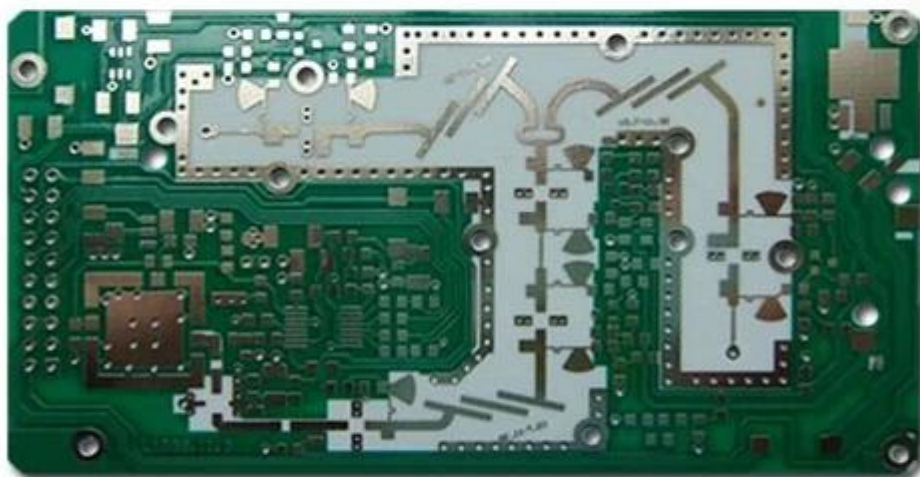

[www.o-leading.com](http://www.o-leading.com)

[Cheapest PCB makers china, Quick turn PCB Printed Circuit Board Manufacturer](#)