


FINISH: THIS BOARD SHALL BE IMMERSION GOLD PLATED ACCORDING TO IPC-6012.
 THICKNESS SHALL BE .050uM OVER 3-6uM NICKEL.
 COPPER PLATE HOLES MINIMUM .025 AVG, .020 MIN.. HOLES MAY NOT BE PLUGGED

Pack with colorless transparent bubble film ,25 PCS/ bag, put desiccant in flank, put humidity indicator card on top side

Layer structure

| Lyr | 残制率(%) | Image | Foil | 最终厚度 | Ilame |
|------|---------|-------|-------|---------|---------------------------------|
| COMP | 91.2163 | | 0.5oz | 2.1748 | RO4350B 0.510mm H/H |
| L2 | 91.2163 | | 0.5oz | 0.6 | |
| | | | | 9.56966 | IT180A 2116 RC56% ① |
| | | | | | IT180A 2116 RC56% ② |
| L3 | 87.06 | | 0.5oz | 0.6 | IT180A 0.800mm H/H 41*43 |
| L4 | 0 | | | 9.7 | IT180A 2116 RC56% ① |
| | | | | | IT180A 2116 RC56% ② |
| L5 | 0 | | 0.5oz | 2.1748 | IT180A 0.510mm H/H 41*43 |
| SOLD | 96.96 | | | | |

O-LEADING
 To Be Reliable. To Be Valuable

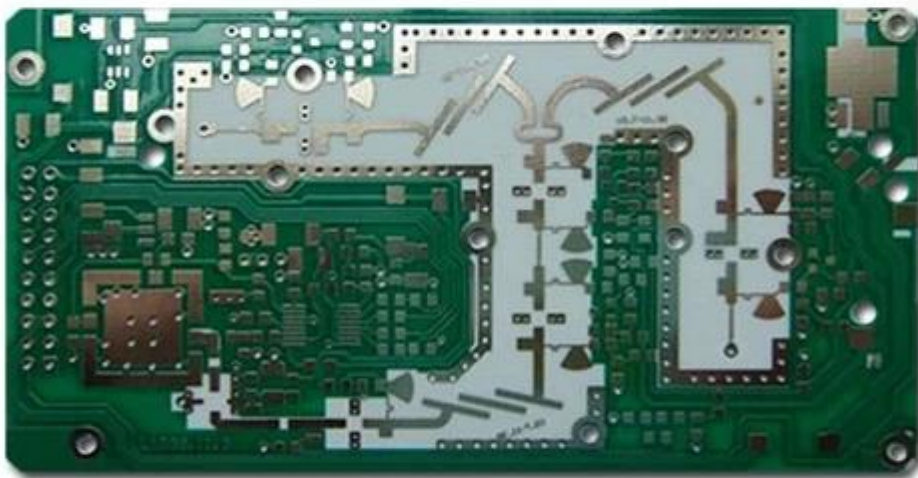

www.o-leading.com

[Cheapest PCB makers china, Quick turn PCB Printed Circuit Board Manufacturer](#)