

# Bienvenue chez O-Leading

O-Leading s'efforce d'être votre partenaire de solution unique dans la chaîne d'approvisionnement EMS, y compris la conception de PCB, la fabrication de PCB et l'assemblage de PCB (PCBA). Nous fournissons certaines des technologies de PCB les plus avancées, y compris les PCB HDI, les PCB multicouches, les PCB rigides et flexibles. Nous pouvons prendre en charge du prototype à virage rapide à la production moyenne et en masse. [Entreprise imprimée PCB multicouche](#)

En général, nos clients mondiaux sont très impressionnés par nos services: réponse rapide, prix compétitif et engagement de qualité.

En regardant vers l'avenir, O-leader se concentrera sur l'innovation et le développement de la technologie de fabrication électronique comme toujours, et déploiera des efforts persistants sur le service unique PCB & PCBA pour fournir des services de première classe et créer plus de valeur pour nos clients.

Nous sommes un fabricant professionnel de PCB avec plus de dix ans d'expérience. Gamme de produits - PCB simple face, double face, multicouche, PCB flexible et MCPCB. Nous pouvons fournir un service de prototypage rapide - S / S en 24 heures, 4-8 couches en 48-96 heures de travail. [Chine PCB multicouche fabricant](#)


PLAQUES DE CUIVRE TROUS MINIMUM .025 AVG, .020 MIN .. LES TROUS NE PEUVENT PAS ÊTRE PLUGGÉS


Pack avec film à bulles transparent incolore, 25 PCS / sac, mettre le dessiccant sur le flanc, mettre la carte d'indicateur d'humidité sur le dessus

## Description du produit

- [Grossistes de circuits imprimés de haute qualité](#)

|                                    |                                                    |
|------------------------------------|----------------------------------------------------|
| PCB P / N                          | Masque de soudure noir pcb avec trou semi-plaqué   |
| Nombre de couches                  | 4L                                                 |
| Matériel                           | FR-4 TG170                                         |
| Board thk                          | 1,6 mm                                             |
| cuiivre thk                        | 1/1/1 / 1oz                                        |
| Taille de trou la plus petite      | 0,3 mm                                             |
| Nombre de trous (pcs)              | 98                                                 |
| ligne w / s                        | 5 / 5mil                                           |
| Contrôle d'impédance. O / N (Tol%) | N                                                  |
| Finition de surface                | ENIG Au: 0,05-0,10UM                               |
| Masque de soudure Sérigraphie      | Noir blanc                                         |
| Taille de carte uniquee            | Dim X (mm): 21; Dim Y (mm): 12                     |
| Panelisation                       | Dim X (mm): 90; Dim Y (mm): 68; Non d'onduleur: 16 |
| Spécial: masque pelable            | N                                                  |
| Routage / poinçonnage              | CNC                                                |

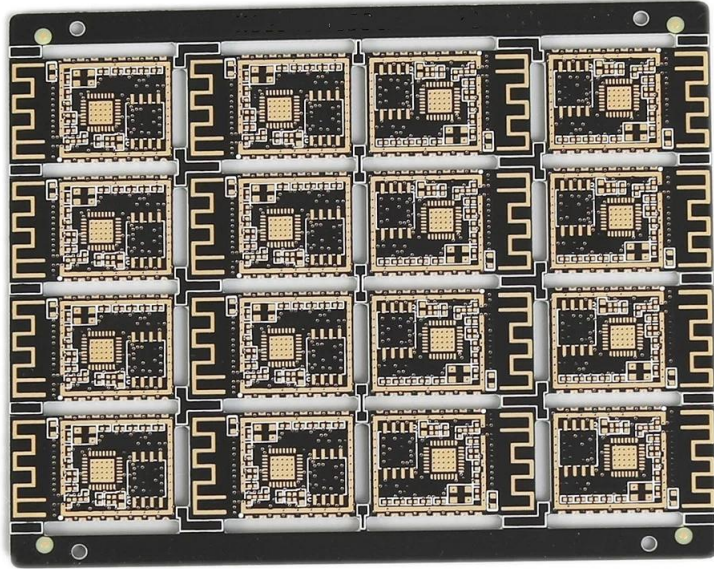

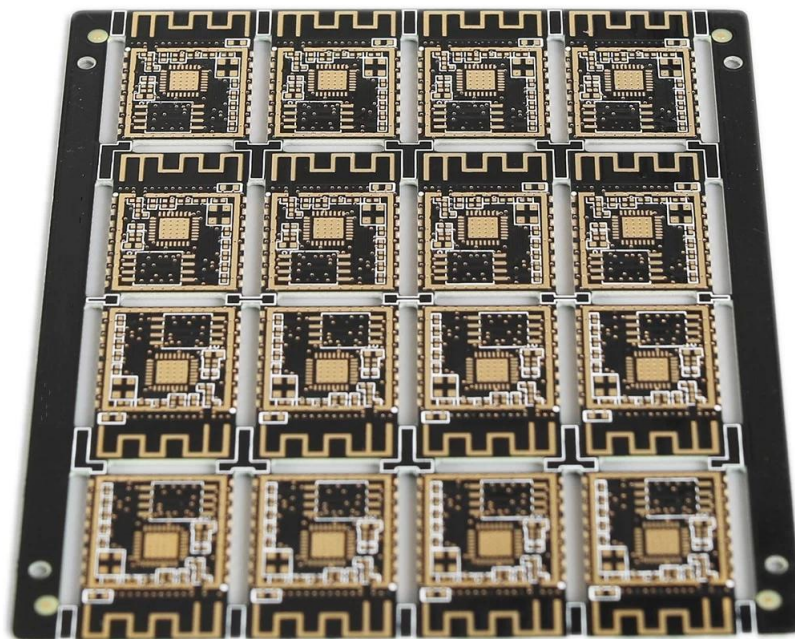

[www.o-leading.com](http://www.o-leading.com)

Notre équipe



## Factory PCB



Automatic vacuum press machine



Drilling Machine



Pattern Plating Machine



Scrubbing Machine



Developing Machine



Routing Machine



High-speed flying probe machine



E-test Machine

## Factory SMT



# Certifications





No. SZXEC1900530401

Date: 30 Mar 2019

Page 1 of 6

O-LEADING SUPPLY CHAIN (HK) CO., LIMITED

1313, FLOOR 13, FORTUNE BUILDING, DANSHUI TOWN, HUIYANG DISTRICT, HUIZHOU, GUANGDONG, CHINA

The following sample(s) was/were submitted and identified on behalf of the clients as : OSP

SGS Job No. : RP19-005089 - SZ

Date of Sample Received : 22 Mar 2019

Testing Period : 22 Mar 2019 - 30 Mar 2019

Test Requested : Selected test(s) as requested by client.

Test Method : Please refer to next page(s).

Test Results : Please refer to next page(s).

**Conclusion :** Based on the performed tests on submitted sample(s), the results of Lead, Mercury, Cadmium, Hexavalent chromium, Polybrominated biphenyls (PBBs), Polybrominated diphenyl ethers (PBDEs) and Phthalates such as Bis(2-ethylhexyl) phthalate (DEHP), Butyl benzyl phthalate (BBP), Dibutyl phthalate (DBP), and Diisobutyl phthalate (DIBP) comply with the limits as set by RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU.

Signed for and on behalf of  
SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Tina Fan  
Approved Signatory



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed and available on request or available at <http://www.burton.com> and the Company also agrees to its electronic form of documents subject to Terms and Conditions for Electronic Documents available at <http://www.burton.com> and the Company's Conditions of Documents subject to Terms and Conditions for Electronic Documents available at <http://www.burton.com>. Any holder of this document is deemed to have accepted the Company's General Conditions of Service and the Company's Terms and Conditions for Electronic Documents and the Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized reproduction, forgery or alteration of this document or the appearance of this document in any form or by any means may be prosecuted to the fullest extent of the law. Unless otherwise stated, results shown in this text report refer only to the samples tested.

\*SOS Ship No.4, Jiaxing Industrial Park, No.42, Jiaxing Road, Jiangsu District, Shanghai, China 518129 | (86-755) 26328888 | (86-755) 83106190 | [www.sgschina.com](http://www.sgschina.com) on  
 in english: [www.sgschina.com](http://www.sgschina.com)

Member of the SGS Group (SGS SA)



No. SZXEC1900530401

Date: 30 Mar 2019

Page 2 of 6

Test Results :

Test Part Description:

| Specimen No. | SGS Sample ID    | Description |
|--------------|------------------|-------------|
| SN1          | SZX19-005304.001 | Green™PCB   |

Remarks :

(1)  $1 \text{ mg/kg} = 1 \text{ ppm} = 0.0001\%$

(2) MDL = Method Detection Limit

(3) ND = Not Detected ( < MDL )

(4) "-" = Not Regulated

RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU

Test Method : With reference to IEC 62321-4:2013+A1:2017, IEC62321-5:2013, IEC62321-7-2:2017, IEC 62321-6:2015 and IEC62321-8:2017, analyzed by ICP-OES, UV-Vis and GC-MS.

| Test Item(s)                 | Limit | Unit  | MDL | Q27 |
|------------------------------|-------|-------|-----|-----|
| Cadmium (Cd)                 | 100   | mg/kg | 2   | ND  |
| Lead (Pb)                    | 1,000 | mg/kg | 2   | 8   |
| Mercury (Hg)                 | 1,000 | mg/kg | 2   | ND  |
| Hexavalent Chromium (Cr(VI)) | 1,000 | mg/kg | 8   | ND  |
| Sum of PBBs                  | 1,000 | mg/kg | -   | ND  |
| Monobromobiphenyl            | -     | mg/kg | 5   | ND  |
| Dibromobiphenyl              | -     | mg/kg | 5   | ND  |
| Tri bromobiphenyl            | -     | mg/kg | 5   | ND  |
| Tetrabromobiphenyl           | -     | mg/kg | 5   | ND  |
| Pentabromobiphenyl           | -     | mg/kg | 5   | ND  |
| Hexabromobiphenyl            | -     | mg/kg | 5   | ND  |
| Heptabromobiphenyl           | -     | mg/kg | 5   | ND  |
| Octabromobiphenyl            | -     | mg/kg | 5   | ND  |
| Nonabromobiphenyl            | -     | mg/kg | 5   | ND  |
| Decabromobiphenyl            | -     | mg/kg | 5   | ND  |
| Sum of PBDEs                 | 1,000 | mg/kg | -   | ND  |
| Monobromodiphenyl ether      | -     | mg/kg | 5   | ND  |
| Dibromodiphenyl ether        | -     | mg/kg | 5   | ND  |
| Tri bromodiphenyl ether      | -     | mg/kg | 5   | ND  |
| Tetrabromodiphenyl ether     | -     | mg/kg | 5   | ND  |
| Pentabromodiphenyl ether     | -     | mg/kg | 5   | ND  |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed and available on request or accessible at <http://www.kals.com/termsandconditions> and/or its specific Terms and Conditions for Electronic Documents at <http://www.kals.com/termsandconditions>. Terms and Conditions Document.asp. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is deemed to have accepted the Terms and Conditions of the Company and the Company's Terms and Conditions Document.asp. Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced without the prior written consent of the Company. Any unauthorized reproduction, alteration, forgery or misuse of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the samples tested.

or email: [CN.Docs@techdata.com](mailto:CN.Docs@techdata.com)  
SGS Bldg. No. 1, Jiefang Road, Phase 1, Hua-Ping District, Longgang District, Shenzhen, China 518129 t (86-755) 25328866 f (86-755) 83106190 www.sgsgroup.com.cn  
中国·深圳·龙岗区平湖街道金田一路1号SGS大厦 邮编: 518129 t (86-755) 25328866 f (86-755) 83106190  
e: [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

Member of the SGS Group (SGS SA)



## ZPMV2.E490354 - WIRING, PRINTED - COMPONENT

## Wiring, Printed - Component

See General Information for Wiring, Printed - Component

**O-LEADING SUPPLY CHAIN (HK) CO LTD**

E490354

ROOM 1205, 12/F  
TAI SANG BANK BLDG  
130-132 DES VOEUS ROAD  
CENTRAL, HONG KONG

| Type                                              | Cond Width    |               | Cond<br>Thk<br>mic(mil) | SS/<br>DS/<br>DSO | Max        |        | Max  |       | Meets |     | C |
|---------------------------------------------------|---------------|---------------|-------------------------|-------------------|------------|--------|------|-------|-------|-----|---|
|                                                   | Min           | Min           |                         |                   | Area       | Solder | Oper | Flame | UL796 |     |   |
|                                                   | mm(in)        | mm(in)        |                         |                   | Diam       | Limits | Temp | Class | DSR   |     |   |
| Multilayer (mass laminate) printed wiring boards. |               |               |                         |                   |            |        |      |       |       |     |   |
| O-LEADING-401                                     | 0.1 (0.004)   | 0.3 (0.012)   | 34 (1.34)               | DS                | 12.7 (0.5) | 260    | 10   | 130   | V-0   | -   | - |
| O-LEADING-407                                     | 0.08 (0.003)  | 0.2 (0.008)   | 17 (0.67)               | DS                | 9.7 (0.4)  | 260    | 10   | 130   | V-0   | All | - |
| Multilayer printed wiring boards.                 |               |               |                         |                   |            |        |      |       |       |     |   |
| O-LEADING-408                                     | 0.125 (0.005) | 0.125 (0.005) | 12 (0.47)<br>Int:136    | DS                | 50.8 (2.0) | 280    | 20   | 130   | V-0   | All | * |
| Single layer printed wiring boards.               |               |               |                         |                   |            |        |      |       |       |     |   |
| O-LEADING-002                                     | 0.38 (0.015)  | 1.14 (0.045)  | 34 (1.34)               | SS                | 19.1 (0.8) | 260    | 10   | 105   | V-0   | All | - |
| O-LEADING-003                                     | 0.38 (0.015)  | 1.14 (0.045)  | 34 (1.34)               | SS                | 19.1 (0.8) | 260    | 10   | 130   | V-0   | ▲   | - |
| O-LEADING-033                                     | 0.15 (0.006)  | 0.3 (0.012)   | 34 (1.34)               | SS                | 25.4 (1.0) | 260    | 10   | 120   | V-0   | All | - |
| O-LEADING-205                                     | 0.1 (0.004)   | 0.3 (0.012)   | 34 (1.34)               | DS                | 69.6 (2.7) | 260    | 10   | 130   | V-0   | All | - |
| O-LEADING-206                                     | 0.15 (0.006)  | 0.33 (0.013)  | 17 (0.67)               | DS                | 69.6 (2.7) | 260    | 10   | 130   | V-0   | All | - |
| O-LEADING-D01                                     | 0.14 (0.006)  | 0.15 (0.006)  | 33 (1.30)               | DS                | 25.4 (1.0) | 260    | 10   | 130   | V-0   | All | * |
| O-LEADING-S01                                     | 0.25 (0.010)  | 0.25 (0.010)  | 17 (0.67)               | SS                | 25.4 (1.0) | 260    | 4    | 130   | V-0   | All | * |

## WIRING, PRINTED - COMPONENT | UL Product iQ

|                      |              |              |           |    |            |     |   |     |     |     |   |
|----------------------|--------------|--------------|-----------|----|------------|-----|---|-----|-----|-----|---|
| <b>O-LEADING-S02</b> | 0.2 (0.008)  | 0.2 (0.008)  | 17 (0.67) | SS | 25.4 (1.0) | 260 | 4 | 130 | HB  | ▲   | * |
| <b>O-LEADING-S03</b> | 0.25 (0.010) | 0.25 (0.010) | 34 (1.34) | SS | 25.4 (1.0) | 260 | 4 | 130 | V-0 | All | * |

\* - CTI marking is optional and may be marked on the printed wiring board.

Marking: Company name or file number and type designation. May be followed by a suffix to denote factory identification or burning test classification.

并不是所有出现在本数据库中的公司名称和产品都满足了UL 跟踪检验服务的要求。只有带有 UL 标志的产品，才应该被视为经过UL认证，并满足UL 跟踪检验服务的要求。注意查看产品上的标志。

UL 允许在线认证目录中所含材料的复制遵循以下条件：1.指南信息、装配、构造、设计、系统和/或认证（文件）必须在不篡改任何数据（或图纸）的情况下完整且无误导性地呈现。2.“经 UL 允许从在线认证目录转载”声明必须出现在所摘取材料的邻近位置。此外，转载材料必须包含以下格式的版权声明：“© 2019 UL LLC”

## Shipping service



| Quick Turn Lead Time |          |                     |
|----------------------|----------|---------------------|
| Layer Count:         | Lead Tim | Special Requirement |
| 1L/2L                | 2-3days  | 24 Hours,48 Hours   |
| 4L                   | 3-4days  | 48 Hours            |
| 6L                   | 4-5days  | 72 Hours            |
| 8L                   | 5-6days  | NA                  |
| 10L                  | 6-7days  | NA                  |
| 12L                  | 7-8days  | NA                  |
| 14L                  | 8-9days  | NA                  |

| Standard Lead Time |                  |                        |
|--------------------|------------------|------------------------|
| Layer Count:       | Sample Lead Time | Volume order lead time |
| 2L                 | 4 days           | 10 days                |
| 4L                 | 5 days           | 11 days                |
| 6L                 | 6 days           | 12 days                |
| 8L                 | 8 days           | 14 days                |
| 10L                | 10 days          | 16 days                |
| 12L                | 12 days          | 18 days                |
| 14L                | 14 days          | 20 days                |
| 16-32L             | 18 days          | 24 days                |

## Capacité du processus

### Capacités de production de PCB

Nombre de couches: 1 couche-32 couches

Épaisseur de cuivre fini: 1 / 3oz-12oz

Largeur / espacement des lignes min. Interne: 3.0mil / 3.0mil

Largeur / espacement des lignes min externes: 4.0mil / 4.0mil

Rapport d'aspect max: 10: 1

Épaisseur du panneau: 0,2 mm à 5,0 mm

Taille maximale du panneau (pouces): 635 \* 1500 mm

Taille minimale du trou percé: 4mil

Tolérance de trou Plated: +/- 3mil

Blind / Buried Vias (types All): OUI

Via remplissage (conducteur, non conducteur): OUI

Matériau de base: FR-4, FR-4High Tg.Halogen free material, Rogers, Aluminium base,Polyimide,

Cuivre lourd

Finitions de surface: HASL, OSP, ENIG, HAL-LF, Immersion silver,Étain d'immersion, doigts d'or, encre de carbone

## **Capacités de production SMT**

Matériau PCB: FR-4, CEM-1, CEM-3, carte à base d'aluminium

Taille maximale du PCB: 510x460mm

Taille minimale du PCB: 50x50mm

Épaisseur du PCB: 0,5 mm à 4,5 mm

Épaisseur du panneau: 0,5-4 mm

Taille minimale des composants: 0201

Composant de taille de puce standard: 0603 et plus

Hauteur maximale des composants: 15 mm

Pas de plomb mini: 0,3 mm

Pas de balle BGA minimum: 0,4 mm

Précision de placement: +/- 0,03 mm