

Product Description

FINISH: THIS BOARD SHALL BE IMMERSION GOLD PLATED ACCORDING TO IPC-6012. THICKNESS SHALL BE .050uM OVER 3-6uM NICKEL.

COPPER PLATE HOLES MINIMUM .025 AVG, .020 MIN.. HOLES MAY NOT BE PLUGGED

Pack with colorless transparent bubble film ,25 PCS/ bag, put desiccant in flank, put humidity indicator card on top side

Layer structure

L1-----HOZ

- PP 0.234mm -
- -

L2-----1OZ


- CORE 0.127mm -


L3-----1OZ

- -
- PP 0.234mm -

L4-----HOZ

O-LEADING
To Be Reliable, To Be Valuable

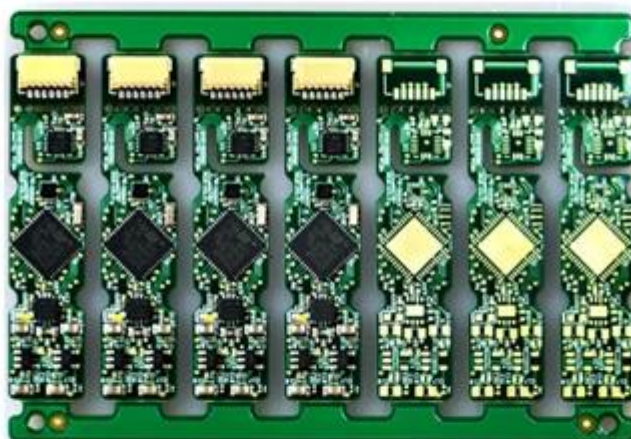

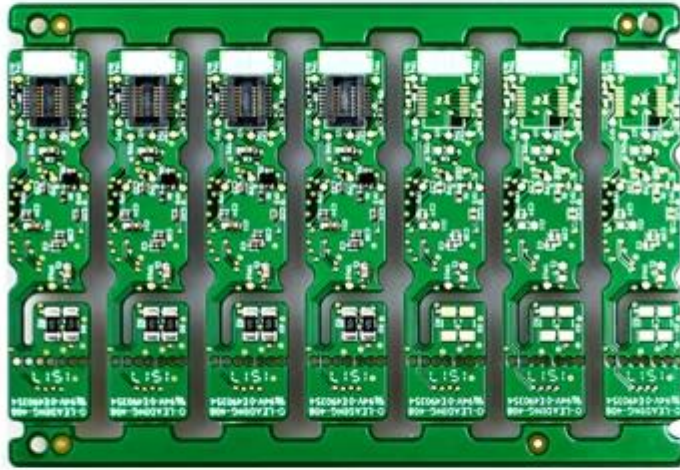

www.o-leading.com



www.o-leading.com



www.o-leading.com

[led pcb board Printed circuit board](#)