

Descrizione del prodotto

8 " Riconoscimento del viso e chiosco di misurazione della temperatura

Modello: KMT-0080U-3caw

8 " Riconoscimento del viso e chiosco di misurazione della temperatura Informazioni regolari	
Umidità lavorativa	0 ~ 90% di umidità relativa, nessuna condensa
Spruzzo salino	Livello RP6 o superiore
Proprietà antistatica	Contatta \pm 6KV, Air \pm 8KV
Energia	DC12V / 2A, 20W (max)
Apertura della colonna	36mm.
Dimensione dell'attrezzatura	252 (l) * 136 (W) * 26 (T) mm
Grandezza schermo	Schermo HD IPS da 8 pollici
Peso	1,7 kg.
Modalità di imballaggio	Imballato in tre cartoni
Luogo d'origine	Cina

[Misurazione della temperatura del viso Passeggiata attraverso il riconoscimento del viso Scanner termico](#)

Immaginati:

8" Facial Recognition and Temperature Measurement Kiosk



IP 65 waterproof
& dustproof




Infrared temperature
measurement



Alarming
system



Linux
Operating system



Accurate face
recognition



Large-capacity
face database

Contactless Infrared temperature detection



Temperature tolerance: $\pm 0.3^{\circ}\text{C}$

Temperature measurement range: $16^{\circ}\text{C} - 40^{\circ}\text{C}$


Detection distance: $\leq 30\text{cm}$

Rapid face Recognition: less than 1s

8-inch IPS full-view high-definition display, no image smearing, no delay.

Automatic gain, automatic white balance, make the true color of the image naturally restore.

Built-in black level sensor for video surveillance, low-light recognition is more accurate.

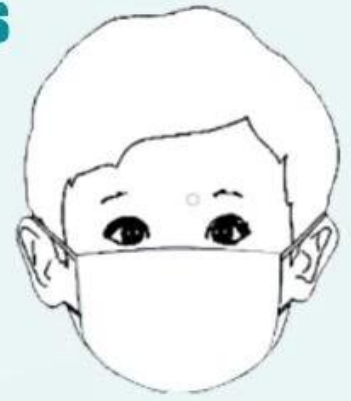






1s

**large storage capacity to meet places
with large traffic.**

24,000 face database

Support 24000+ face comparison data and 160,000 recognition records.



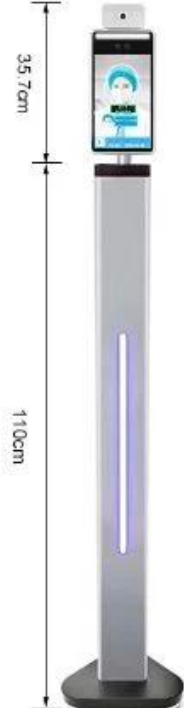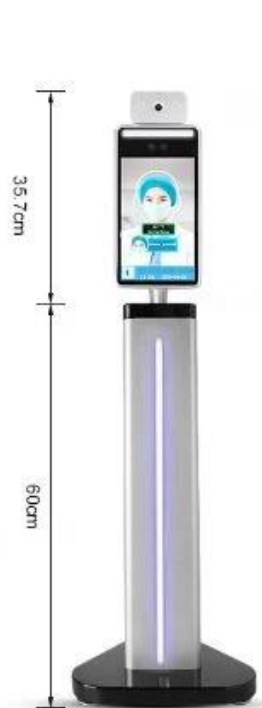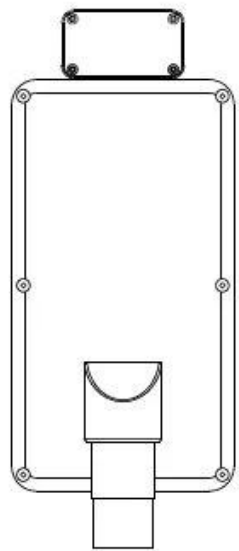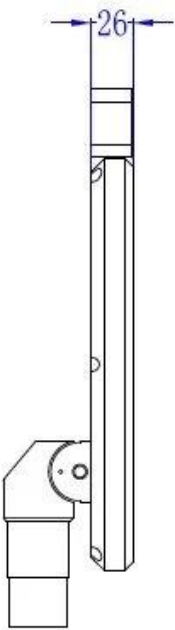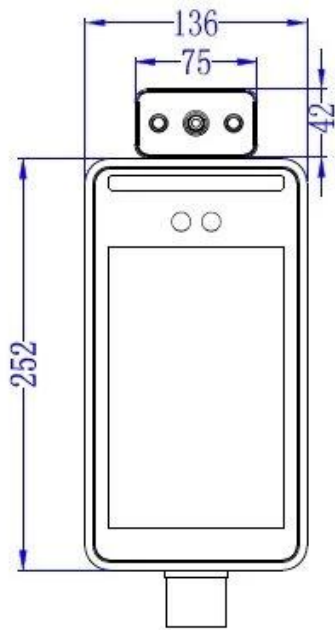

Alarm system for temperature measurement and entry management



Normal temperature: pass

abnormal temperature: can't pass



- Stranger
- Temperature measurement
- No entry



Flexible installation

Desktop



turnstile



wall mounted



Tripod



Pillar



Application

Bus, supermarket, school, government, hospital, factory



customized multiple interfaces



Immagini dettagliate

















Model	KMT-0080U-3CAW
Hardware	
Processor	Dual Core Processor+ 1G memory + 16G flash
Operating system	Linux Operating system
Storage	Support TF card storage
Viewing angle	Vertical viewing angle: 30°; Horizontal viewing angle: 30°
Sensor	1/2.8" Progressive Scan CMOS(IMX307)
Lens	6mm
Communication	Support 4G \ WIFI \ bluetooth ; can be customized
Speaker	voice playback content can be customized
Temperature measurement performance	Please find the notes on last page
Measurement range	16℃ - 40℃ (Indoor without wind)
Temperature measurement	European original lens
Sensors type	Medical grade European imported sensors
Measurement accuracy	±0.3℃
Temperature resolution	0.1℃
Temperature detection distance	≤30cm
Measurement response time	300ms
Performance	
Recognition	1.2~2.2 meters, angle adjustable
Recognition distance	0.3~1.5 meters, depends on lens
Recognition time	<0.5s
Storage capacity	160,000 capture records
Face capacity	24000pcs
Screen brightness	≥400 cd/m2
Interface	
Switching output	1 way switch output, other GPIO port can be customized
Network interface	1 RJ45 10M / 100M adaptive Ethernet port, Gigabit Ethernet port can be customized
Wiegand interface	1 Wiegand interface input/output
Communication interface	1 RS485 interface
USB interface	1 USB interface
Camera	
Camera	Dual cameras, visible and near infrared, support live detection
Effective pixels	2MP, 1920*1080
Min Illumination	Color 0.01Lux @F1.2(ICR);B/W 0.001Lux @F1.2 (ICR)
SNR	≥50db(AGC OFF)
WDR	120db, ISP algorithm face partial exposure
Function	
Web side configuration	support
remote upgrade	support
LAN/ WAN	support
Regular	
Working humidity	0~90% relative humidity, no condensation
Salt spray	level Rp6 or above
Antistatic	contact ±6KV, air ±8KV
Power	DC12V/2A , 20W(MAX)
Column aperture	36mm
Equipment size	252(L) * 136 (W) * 26 (T) mm
Screen size	8 inches IPS HD screen
Weight	1.7 kg

Imballaggio e spedizione

Confezione e consegna

Unità di vendita	Singolo articolo			
Dimensione del pacchetto singolo.	25.3x14.5x14,5 cm			
Singolo peso lordo	1.500 kg.			
tipo di pacchetto				
scatola per display	430 * 170 * 115mm, Peso: 2.1kg.			
cartone per display	500 * 195 * 425mm, 3 pz per cartone, G.W: 8,8 kg.			
Scatola di cartone della staffa	305 * 51 * 290mm, G.W: 0.3kg.			
Dimensioni del cartone per staffa	327 * 340 * 317mm, 6pcs per cartone, G.W: 18 kg.			
Dimensioni della scatola di supporto da 0,6 m	630 * 132 * 124mm, G.W: 0.3kg.			
Dimensioni del cartone dello stand a 0,6 m	650 * 280 * 260mm, 4pcs per cartone, G.W: 15 kg.			
Dimensioni del supporto da 1,1 m	1130 * 132 * 124mm, G.W: 0,5 kg.			
1.1m Stand Carton Size	650 * 280 * 260mm, 4pcs per cartone, G.W: 19.8kg.			
Tempi di consegna				
Quantità (pezzi)	1-100.	101.-500.	501-1000.	> 1000.
Est. Tempo (giorni)	3.	5.	7.	Essere negoziato

FAQ

Q.: Cosa posso ottenere il prezzo?

A: Citare di solito entro 24 ore dopo aver ricevuto la vostra richiesta. Se sei molto urgente per ottenere il prezzo, ti preghiamo di dirci nella tua e-mail in modo che consideriamo la tua richiesta come priorità.

D: Qual è la tua durata del commercio?

A: Accettiamo Exw, FOB Shenzhen o porto di destinazione CIF. Puoi scegliere quello che è il più conveniente o conveniente per te.

D: E il tempo di consegna per la produzione di massa?

A: Onestamente, dipende dalla quantità dell'ordine e dalla stagione che effettui l'ordine. L'ordine del campione è entro 2 giorni. L'ordine OEM / OEM avrà bisogno di tempo extra.

Capire di più: [**All'ingrosso della temperatura di allarme della febbre non touch**](#)