



COPPER PLATE HOLES MINIMUM .025 AVG, .020 MIN.. HOLES MAY NOT BE PLUGGED  
Special requirement:ENIG, Impedance: Tol: +/-7%, Press fit hole

Pack with colorless transparent bubble film ,25 PCS/ bag, put desiccant in flank, put humidity indicator card on top side


Layer structure

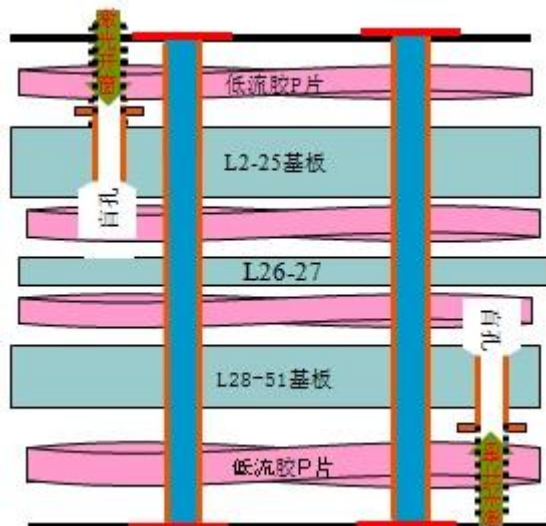


**O-LEADING**  
To Be Reliable, To Be Valuable

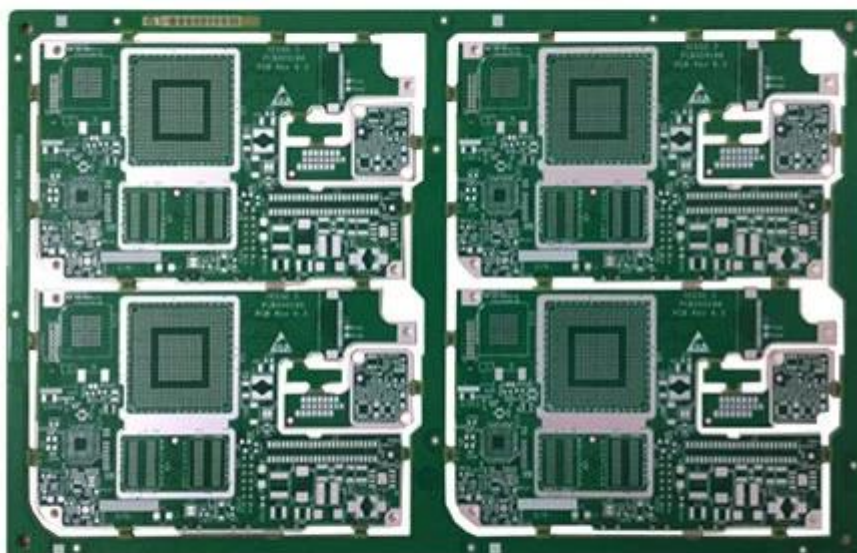

[www.o-leading.com](http://www.o-leading.com)

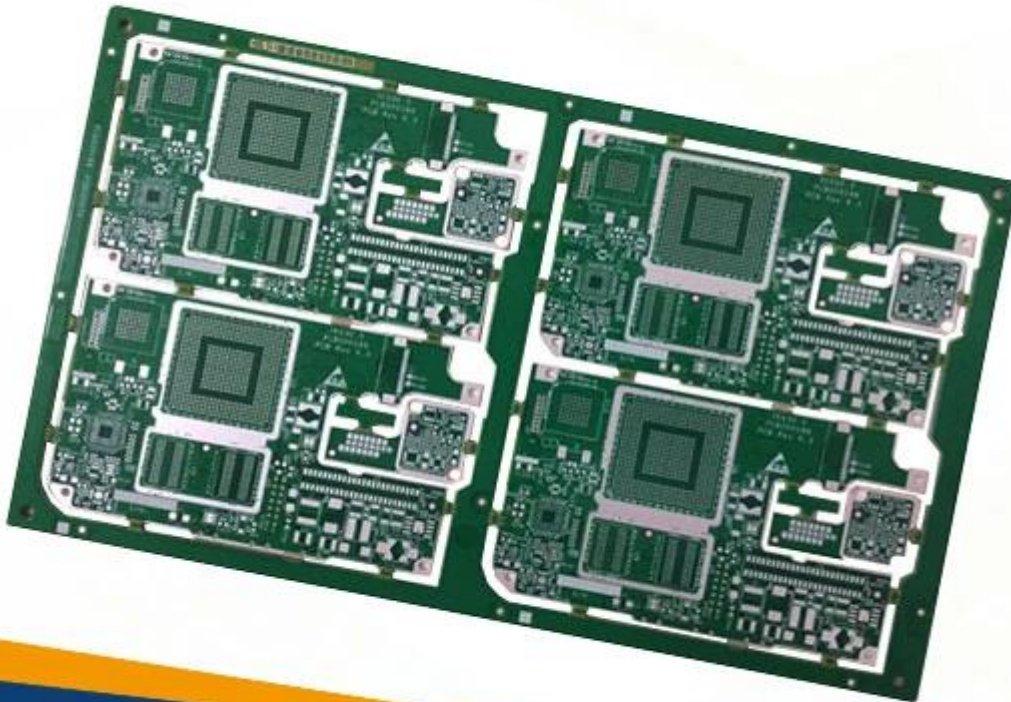

[www.o-leading.com](http://www.o-leading.com)

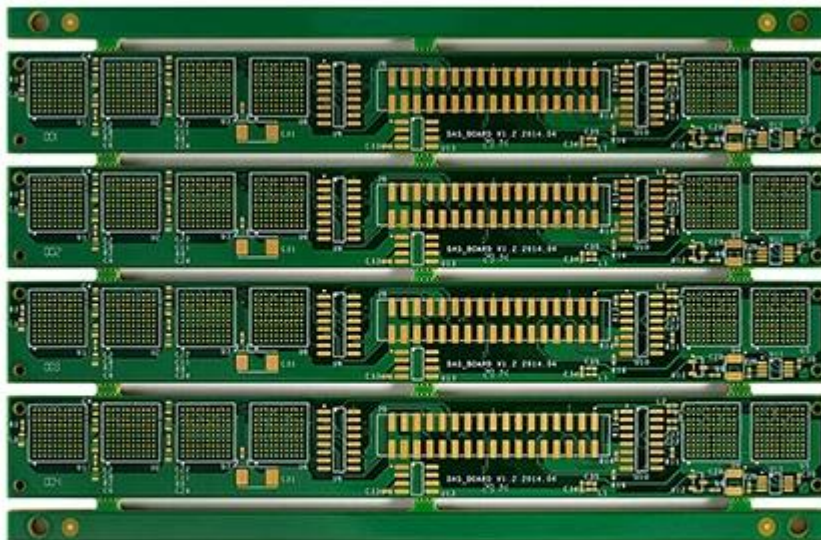

[www.o-leading.com](http://www.o-leading.com)

[PCB with imedance control, Printed circuit board in china](#)