Benvenuto in O-Leading

O-Leading si impegna per essere il partner della soluzione one stop nella catena di fornitura EMS, tra cui progettazione PCB, fabbricazione PCB e assemblaggio PCB (PCBA). Forniamo alcune delle tecnologie PCB più avanzate, tra cui PCB HDI, PCB multistrato, PCB rigidi-flessibili Siamo in grado di supportare dal prototipo a rotazione rapida alla produzione media e di massa. (**Produttore di PCB**)

In generale, i nostri clienti globali sono molto colpiti dai nostri servizi: risposta rapida, prezzo competitivo e impegno di qualità. Fornire un servizio tecnico più prezioso e una soluzione globale è il modo in cui Oleader in avanti.

Guardando al futuro, O-Leading si concentrerà sull'innovazione e sullo sviluppo della tecnologia di produzione elettronica come sempre e farà sforzi costanti sul servizio one-stop PCB e PCBA per fornire servizi di prima classe e creare più valore per i nostri clienti.

Descrizione del prodotto

FORI RAME MINIMO .025 AVG, .020 MIN .. I FORI NON POSSONO ESSERE COLLEGATI Confezione con pellicola trasparente trasparente incolore, 25 pezzi / sacchetto, mettere l'essiccante nel fianco, mettere la scheda dell'indicatore di umidità sul lato superiore

Luogo d'origine	Guangdong, Cina (continente)	Marchio	O-leader
Materiale di base	FR-4, alluminio, Rogers, rame	Spessore di rame	0,5 once-5 once
	pesante ecc.		
Min. Dimensione del	0,2 millimetri	Min. Larghezza della	0,2 millimetri
foro		linea	
		Spessore della scheda	0.1-5mm
	OSP, HASL senza piombo		
applicabile a	led, cellulare, condizionatori,	personaggio	PCB di controllo
	lavatrici		industriale
certificati	ISO9001, UL, RoHS, SGS	Q / CTN	requisito del cliente
peso	0,01 kg -5 kg	MOQ	10 pezzi
colore	blu, rosso, verde, nero. giallo	Min. Interlinea	0,2 millimetri
Numero di modello	assemblaggio pcb pcproduttore ba	prezzo	\$ 0,1- \$ 10
tipo desigh	requisito del cliente	taglia	0.01m3-10m3













www.o-leading.com












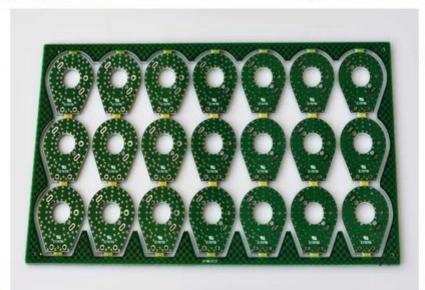

www.o-leading.com













www.o-leading.com












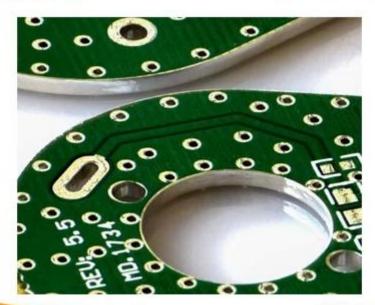

www.o-leading.com












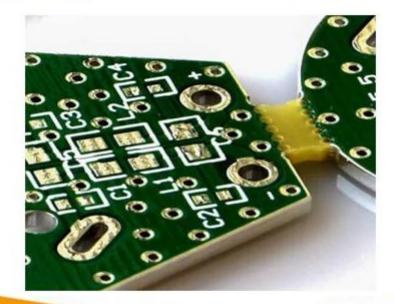

www.o-leading.com













www.o-leading.com



Factory PCB



Automatic vacuum press machine



Drilling Machine



Pattern Plating Machine



Scrubbing Machine



Developing Machine



Routing Machine



High-speed flying probe machine



E-test Machine

Factory SMT













certificazioni







Test Report

O-LEADING SUPPLY CHAIN (HK) CO., LIMITED

No. SZXEC1900530401

1313,FLOOR 13, FORTUNE BUILDING, DANSHUI TOWN, HUIYANG DISTRICT, HUIZHOU, GUANGDONG, CHINA

Date: 30 Mar 2019 Page 1 of 6

Test Report No. SZXEC1900530401 Date: 30 Mar 2019 Page 2 of 6

Test Results :

Test Part Description :

 Specimen No.
 SGS Sample ID
 Description

 SN1
 SZX19-005304.001
 Green*PCB**

(1) 1 mg/kg = 1 ppm = 0.0001% (2) MDL = Method Detection Limit

(3) ND = Not Detected (< MDL)

(4) "-" = Not Regulated

RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU

Test Method : With reference to IEC 62321-4:2013+A1:2017, IEC682321-5:2013, IEC62321-7:2:2017, IEC 62321-6:2015 and IEC62321-8:2017, analyzed by ICP-OES, UV-Vis and GC-MS.

Test Item(s)	Limit	Unit	MDL	001
Cadmium (Cd)	100	mg/kg	2	ND
Lead (Pb)	1,000	mg/kg	2	8
Mercury (Hg)	1,000	mg/kg	2	ND
Hexavalent Chromium (Cr(VI))	1,000	mg/kg	8	ND
Sum of PBBs	1.000	mg/kg		ND
Monobromobiphenyl		mg/kg	5	ND
Dibromobiphenyl	12	mg/kg	5	ND
Tribromobiphenyl	15	mg/kg	5	ND
Tetrabromobiphenyl		mg/kg	5	ND
Pentabromobiphenyl		mg/kg	5	ND
Hexabromobiphenyl		mg/kg	5	ND
Heptabromobiphenyl		mg/kg	5	ND
Octabromobiphenyl		mg/kg	5	ND
Nonabromobiphenyl	6	mg/kg	5	ND
Decabromobiphenyl		mg/kg	5	ND
Sum of PBDEs	1,000	mg/kg		ND
Monobromodiphenyl ether		mg/kg	5	ND
Dibromodiphenyl ether	12	mg/kg	5	ND
Tribromodiphenyl ether	2	mg/kg	5	ND
Tetrabromodiphenyl ether	-	mg/kg	5	ND
Pentabromodiphenyl ether		mg/kg	5	ND



in writing, this document is issued by the Company subject to its General Conditions of Service as for accessible at high civere ass convent forms and Conditions again and for electronic ternal doc fishors for Electronic Documents is inter/investage.com/lent ferms end-Conditions[Ferms-e]-Documents missiants of labelity, independentation and jurisdiction insues defined therein, any folder of this docu-

- Remark (14.0 post-times-days-scene)
(2586g to 4.1 post-times-form) (14.0 post-times-for

Member of the SGS Group (SGS SA)

The following sample(s) was/were submitted and identified on behalf of the clients as : OSP

SGS Job No. : RP19-005089 - SZ Date of Sample Received : 22 Mar 2019

22 Mar 2019 - 30 Mar 2019 Testing Period :

Test Requested : Selected test(s) as requested by client. Test Method Please refer to next page(s).

Test Results : Please refer to next page(s).

Conclusion:

Based on the performed tests on submitted sample(s), the results of Lead. Mercury, Cadmium, Hexavalent chiromium, Polybrominated biphenyls (PBBs), Polybrominated diphenyl ethers (PBBcs) and Phthalates such as Bis(2-ethylbexyl) phthalate (DBFP). Bibutyl phthalate (DBFP). Tolbutyl phthalate (DBFP), and Diisobutyl phthalate (DBFP) comply with the limits as set by RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/85/EU.

Signed for and on behalf of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

lina

Tina Fan Approved Signatory



Max

Max

UL Product iQ™



ZPMV2.E490354 - WIRING, PRINTED - COMPONENT

Wiring, Printed - Component

See General Information for Wiring, Printed - Component

Cond Width

O-LEADING SUPPLY CHAIN (HK) CO LTD

E490354

ROOM 1205, 12/F TAI SANG BANK BLDG 130-132 DES VOEUS ROAD CENTRAL, HONG KONG

		Min	Cond	SS/	Area	Solo	der	Oper		Meets	c
	Min	Edge	Thk	DS/	Diam	Lim	its	Temp	Flame	UL796	T
Type	mm(in)	mm(in)	mic(mil)	DSO	mm(in)	c	sec	c	Class	DSR	1
Multilayer (m	Multilayer (mass laminate) printed wiring boards.										
O-LEADING- 401	0.1 (0.004)	0.3 (0.012)	34 (1.34)	DS	12.7 (0.5)	260	10	130	V-0	3	50
O-LEADING- 407	0.08 (0.003)	0.2 (0.008)	17 (0.67)	DS	9.7 (0.4)	260	10	130	V-0	All	-
Multilayer pri	nted wiring bo	ards.							3		
O-LEADING- 408	0.125 (0.005)	0.125 (0.005)	12 (0.47) Int:136	DS	50.8 (2.0)	280	20	130	V-0	All	*
Single layer p	rinted wiring b	oards.							3 77	7.57	
O-LEADING- 002	0.38 (0.015)	1.14 (0.045)	34 (1.34)	SS	19.1 (0.8)	260	10	105	V-0	All	-
O-LEADING- 003	0.38 (0.015)	1.14 (0.045)	34 (1.34)	SS	19.1 (0.8)	260	10	130	V-0	A	-
O-LEADING- 033	0.15 (0.006)	0.3 (0.012)	34 (1.34)	SS	25.4 (1.0)	260	10	120	V-0	All	*
O-LEADING- 205	0.1 (0.004)	0.3 (0.012)	34 (1.34)	DS	69.6 (2.7)	260	10	130	V-0	All	-
O-LEADING- 206	0.15 (0.006)	0.33 (0.013)	17 (0.67)	DS	69.6 (2.7)	260	10	130	V-0	All	-
O-LEADING- D01	0.14 (0.006)	0.15 (0.006)	33 (1.30)	DS	25.4 (1.0)	260	10	130	V-0	All	*
O-LEADING- S01	0.25 (0.010)	0.25 (0.010)	17 (0.67)	SS	25.4 (1.0)	260	4	130	V-0	All	*

WIRING, PRINTED - COMPONENT | UL Product iQ

O-LEADING- S02	0.2 (0.008)	0.2 (0.008)	17 (0.67)	SS	25.4 (1.0)	260	4	130	НВ	A	*
O-LEADING- S03	0.25 (0.010)	0.25 (0.010)	34 (1.34)	SS	25.4 (1.0)	260	4	130	V-0	All	*

 $[\]mbox{\ensuremath{\star}}$ - CTI marking is optional and may be marked on the printed wiring board.

Marking: Company name or file number and type designation. May be followed by a suffix to denote factory identification or burning test classification.

并不是所有出现在本数据库中的公司名称和产品都满足了UL 跟踪检验服务的要求。只有带有 UL 标志的产品,才应该被视为经过UL认证,并满足UL 跟踪检验服务的要求。注意查看产品上的标志。

UL 允许在线认证目录中所含材料的复制遵循以下条件: 1.指南信息、装配、构造、设计、系统和/或认证(文件)必须在不篡攻任何数据(或图纸)的情况下完整且无误导性地呈现。2."经 UL 允许从在线认证目录转载"声明必须出现在所摘取材料的邻近位置。此外,转载材料必须包含以下格式的版权声明:"© 2019 UL LLC"

Imballaggio e consegna

Shipping service











	Quick Turn Lead Time					
Layer Count:	Lead Tim	Special Requirement				
1L/2L	2-3days	24 Hours,48 Hours				
4L	3-4days	48 Hours				
6L	4-5days	72 Hours				
8L	5-6days	NA				
10L	6-7days	NA				
12L	7-8days	NA				
14L	8-9days	NA				

	Standard Lead Time	
Layer Count:	Sample Lead Time	Volume order lead time
2L	4 days	10 days
4L	5 days	11 days
6L	6 days	12 days
8L	8 days	14 days
10L	10 days	16 days
12L	12 days	18 days
14L	14 days	20 days
16-32L	18 days	24 days

Capacità di processo

Funzionalità di produzione di PCB

Conteggio strati: 1 strato-32 strati Spessore rame finito [] 1 / 3oz-12oz

Larghezza min linea / spaziatura interna [] 3.0mil / 3.0mil Larghezza min linea / spaziatura esterna: 4.0mil / 4.0mil

Rapporto di aspetto massimo: 10: 1 Spessore della scheda ∏ 0,2 mm-5,0 mm

Dimensione massima del pannello (pollici): 635 * 1500mm

Dimensione minima del foro: 4mil Tolleranza del foro Plated: +/- 3mil Blind / Buried Vias (tipi All): Sì

Via Fill (conduttivo, non conduttivo): Sì

Materiale base: FR-4, FR-4hg Tg. Materiale privo di alogeni, Rogers, Base in alluminio, poliimmide,

Rame pesante

Finiture superficiali: HASL, OSP, ENIG, HAL-LF, argento mmmm, Immersion Tin, dita d'oro, inchiostro al

carbonio

Capacità di produzione SMT

Materiale PCB: FR-4, CEM-1, CEM-3, scheda a base di alluminio

Dimensione massima PCB: 510x460mm

Dimensioni min PCB: x 50x50mm Spessore PCB [] 0,5 mm-4,5 mm Spessore della scheda [] 0,5-4mm Dimensioni min componenti: 0201

Componente di dimensioni del chip standard: 0603 e superiori

Altezza massima componente [] 15mm Passo minimo di piombo: 0,3 mm Passo palla BGA min: 0.4mm

Precisione di posizionamento: +/- 0,03 mm