

PCB

Specification

Material	FR-4	Thickness	0.5oz~5oz
Min Thickness	0.2mm	Min Drill	0.2mm
Surface	OSP/HASL	Finish	0.1/5mm
Standards	ISO9001, UL, RoHS, SGS	Q / CTN	10PCS-100PCS
Weight	0.01kg -5kg	MOQ	10
Files	pcb, pba	Min Drill	0.2mm
Price			\$ 0.1-\$ 10
Lead Time			0.01m3-10m3


16-12days

Quantity	16
Lead Time	7-12days

16

16-12days

	2014		2015~2016		2017~2018	
	Min	Max	Min	Max	Min	Max
Thickness	32	42	38	44	42	48
Thickness/公差µm	50/50	40/45	40/45	40/40	35/40	35/35
Thickness 公差mm	0.15	0.10	0.15	0.10	0.15	0.10
PTH	14#1	16#1	16#1	18#1	18#1	20#1
N + C + N	4 + C + 4	5 + C + 5	5 + C + 5	6 + C + 6	5 + C + 5	6 + C + 6
公差	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6
公差		-		-		-
Min Thickness µm	50	40	40	30	40	30
Min Thickness µm	75	65	65	50	50	40
公差		-		-		-
Material	FR4, Megtron, Nelco, Rogers, Heavy Copper					
PCB		-		-		-
Standards	HASL, ENIG, OSP, RoHS, UL, ISO9001, SGS, ISO14001					

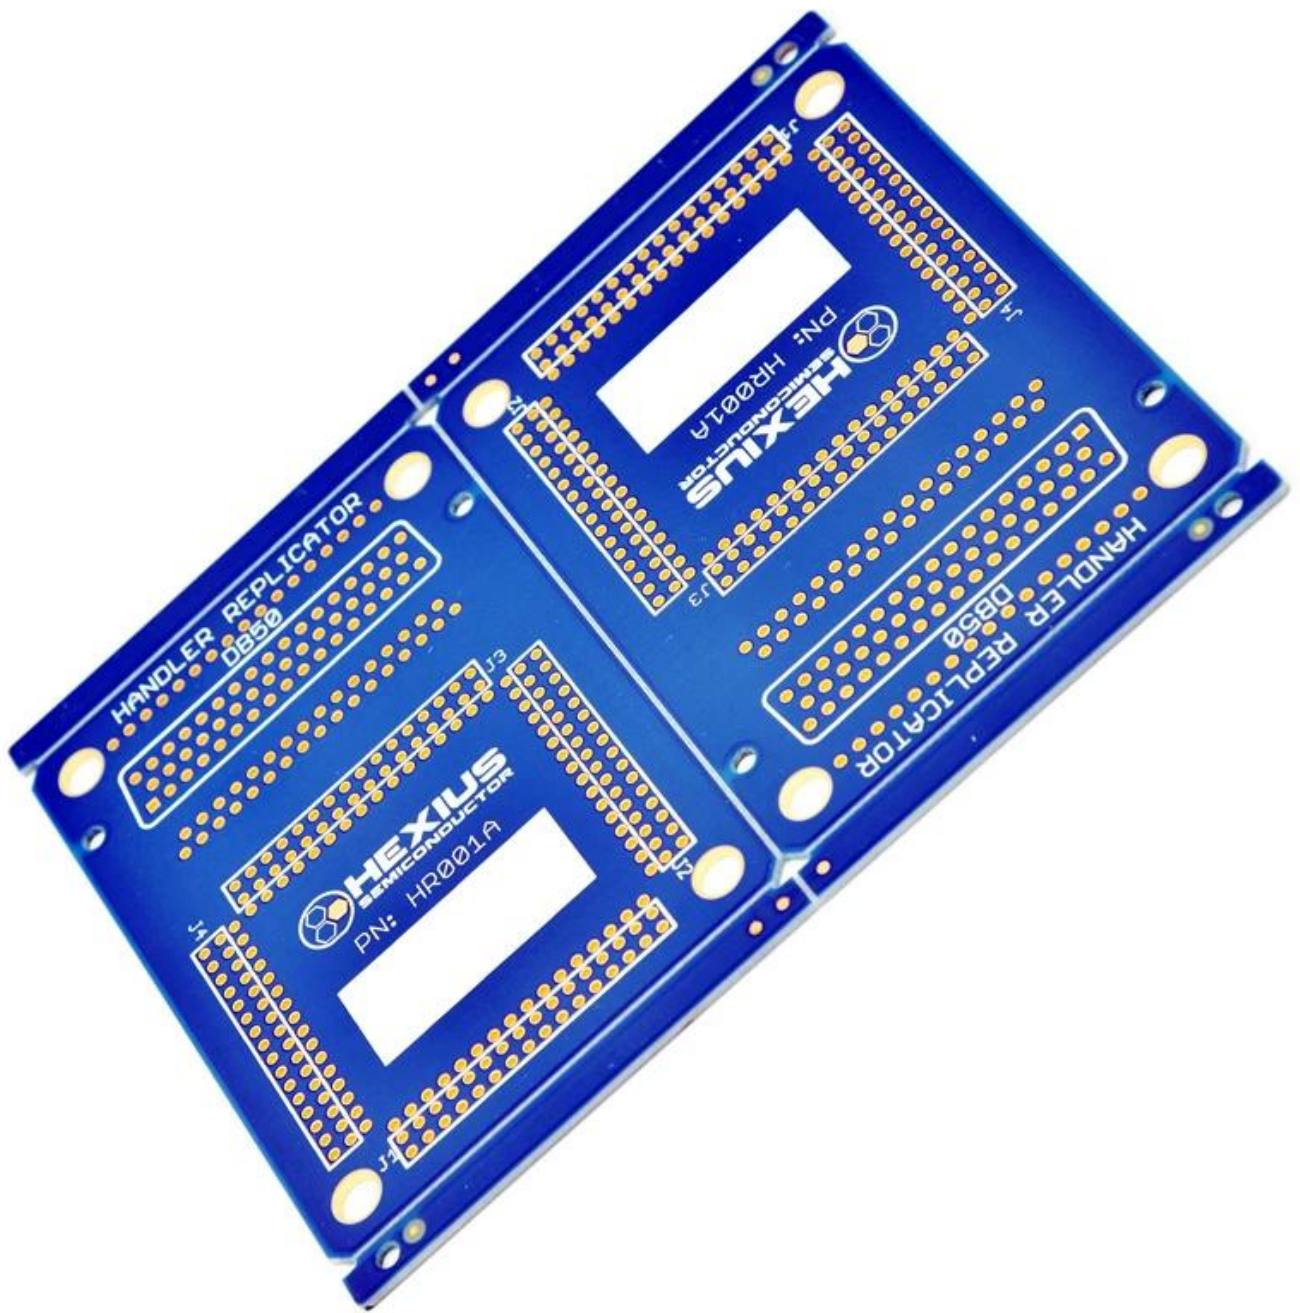


HANDLER REPLICATOR
DB50

HEXIUS
SEMICONDUCTOR
PN: HR001A

HEXIUS
SEMICONDUCTOR
PN: HR001A

HANDLER REPLICATOR
DB50

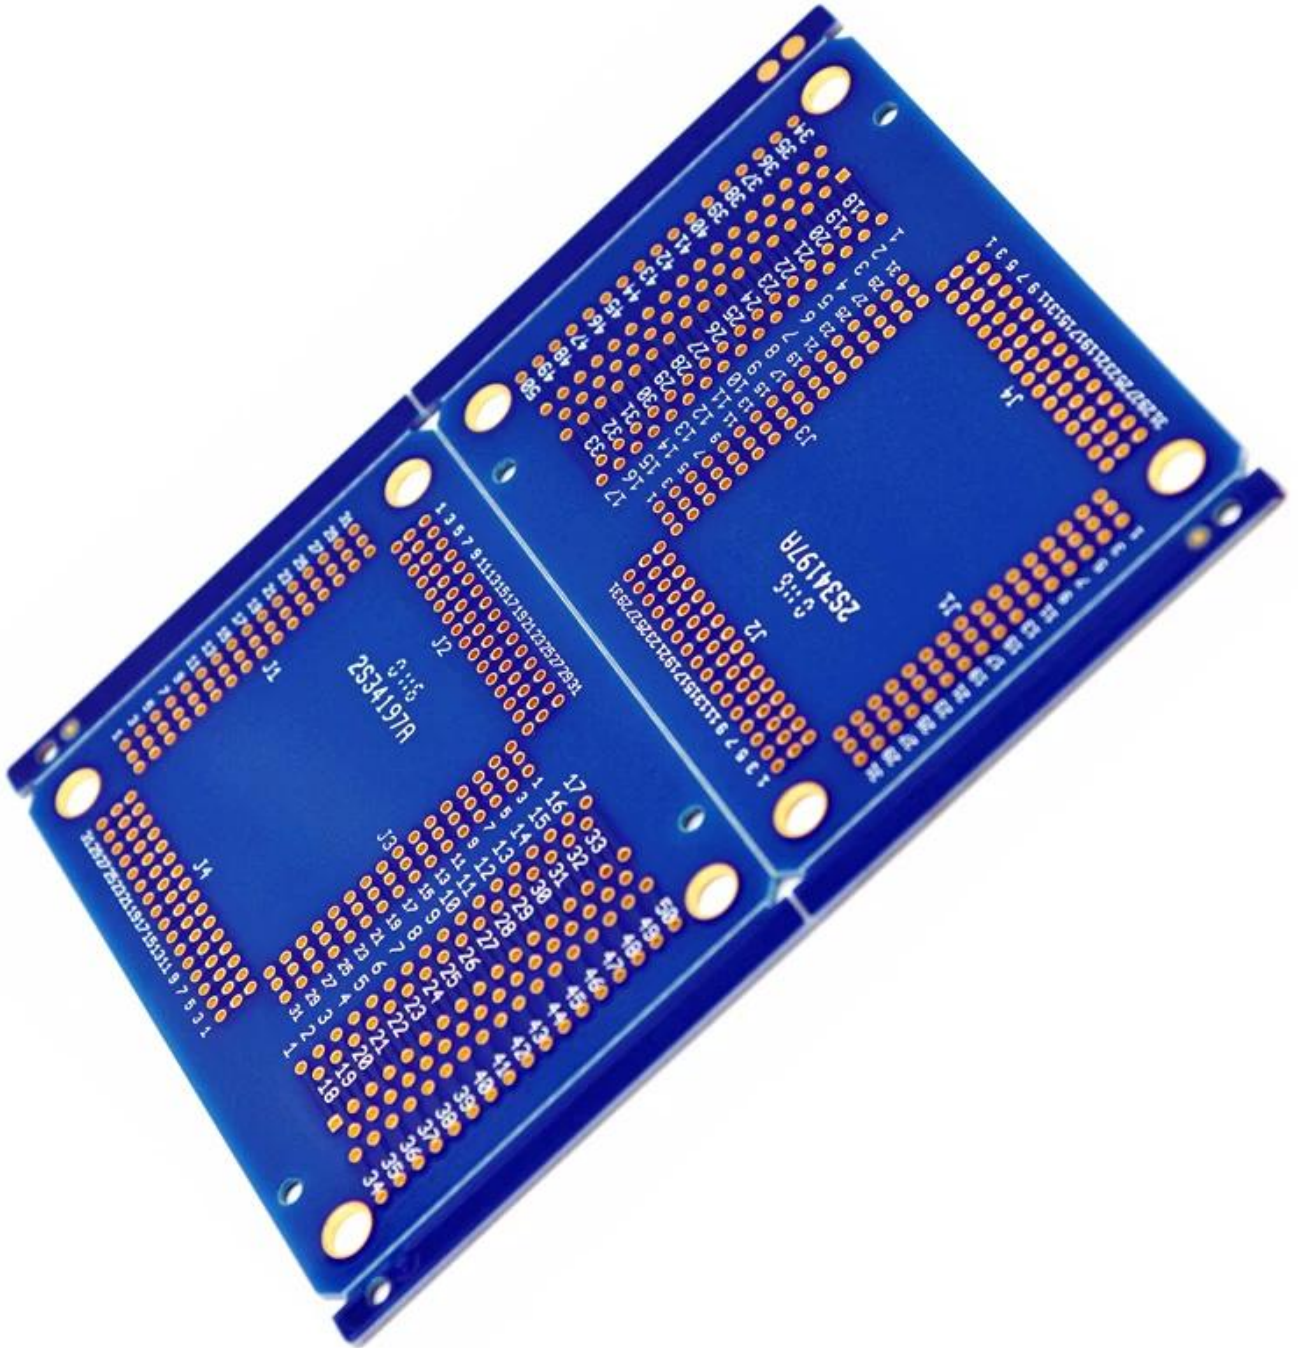

□□□□
[□□□PCB□□□□□□□□□□□□□□□□](#)