


COPPER PLATE HOLES MINIMUM .025 AVG, .020 MIN.. HOLES MAY NOT BE PLUGGED


This PN required 2/2mil fine line ; fine thin□Low Dk

Pack with colorless transparent bubble film ,25 PCS/ bag, put desiccant in flank, put humidity indicator card on top side

### Layer structure

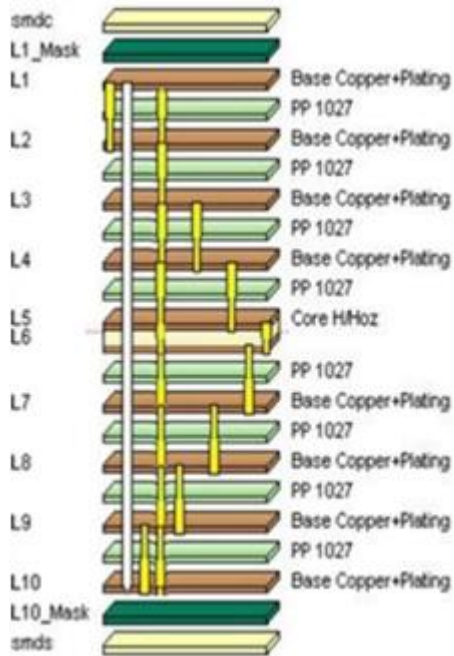


**O-LEADING**  
To Be Reliable, To Be Valuable

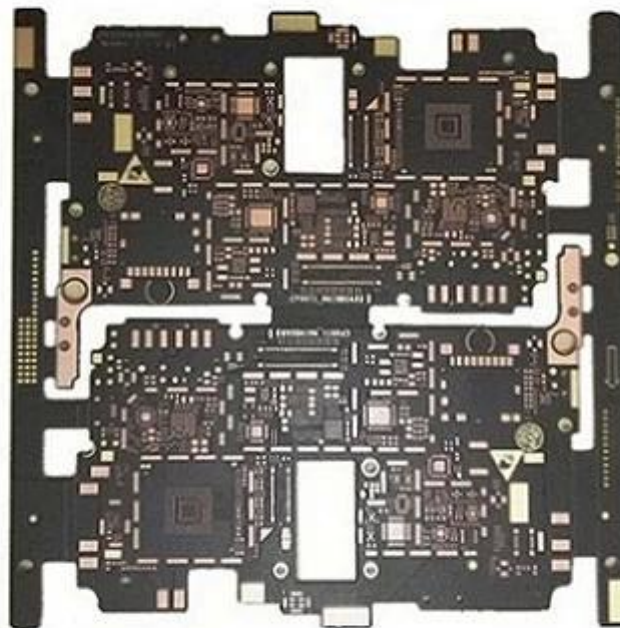

[www.o-leading.com](http://www.o-leading.com)

**O-LEADING**  
To Be *Reliable*, To Be *Valuable*

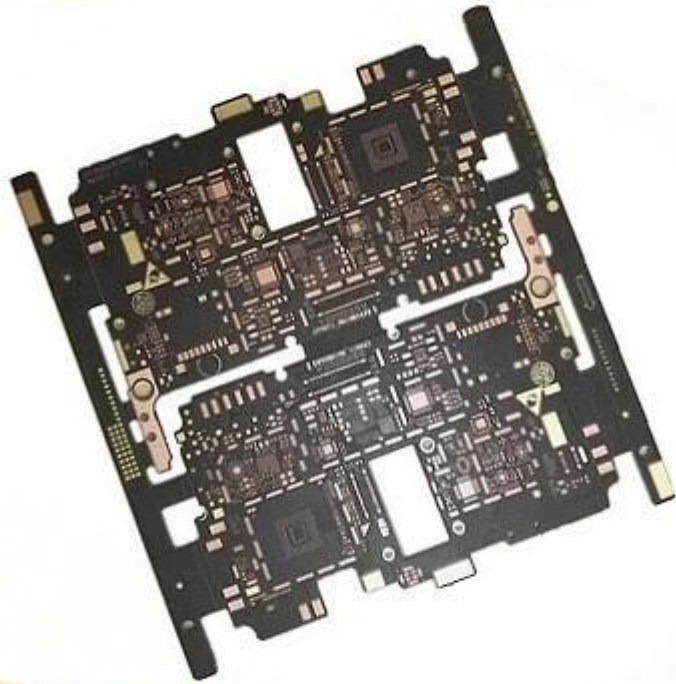

[www.o-leading.com](http://www.o-leading.com)

**O-LEADING**  
To Be *Reliable*, To Be *Valuable*



[www.o-leading.com](http://www.o-leading.com)

[Printed circuit board supplier](#) , [HDI pcb Printed circuit board](#) , [Quick turn pcb Printed circuit board](#)