

O

10PCB - PCBMCPCB
 - 24S / S48-964-8

.025 AVG.020..

25/


			O
	FR-4		0.55
	0.2mm		0.2mm
	OSPHASL		0.15mm
	LED		PCB
	ISO9001ULRoHSSG	Q / CTN	10PCS-100PCS
	0.01kg5kg	MOQ	10
			0.2mm
	PCBPCB		\$ 0.1\$ 10
			0.01m 310m 3

	16OEM PCB
	7-12

16OEM PCB

項目	2014年		2015年2016		2017年2018年	
	項目	項目	項目	項目	項目	項目
項目	32	42	38	44	42	48
項目/項目mm	50/50	40/45	40/45	40/40	35/40	35/35
項目 項目mm	0.15	0.10	0.15	0.10	0.15	0.10
項目 PTH	14±1	16±1	16±1	18±1	18±1	20±1
N + C + N	4 + C + 4	5 + C + 5	5 + C + 5	6 + C + 6	5 + C + 5	6 + C + 6

銅箔厚度mm	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6
銅厚mm	0.035	-	0.035	-	0.035	-
銅箔厚度mmμm	50	40	40	30	40	30
銅厚mmμm	75	65	65	50	50	40
銅厚mm mm/mm	0.035	-	0.035	-	0.035	-
銅箔	FR4MegtronNelcoRogersHeavy Copper					
銅厚mm	0.035	-	0.035	-	0.035	-
銅箔	銅箔HASLENIGOSP銅箔厚度mm					
	銅箔厚度mm銅箔厚度mm銅箔厚度mm銅箔厚度mm銅箔厚度mm					
	銅箔厚度mm銅箔厚度mm					

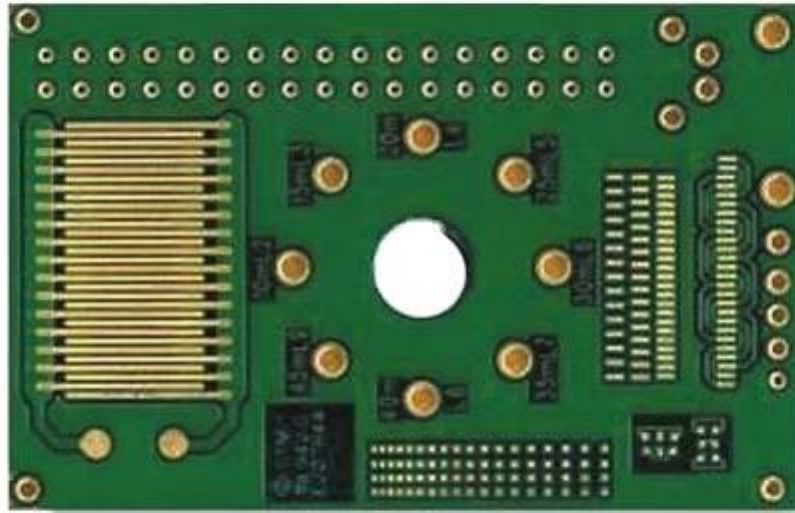

www.o-leading.com

PCB PCB PCB

PCB







2017/26 2016VZL430354 - Wiring, Printed - Component

ONLINE CERTIFICATIONS DIRECTORY

ZPMV2.E490354
Wiring, Printed - Component

For enhanced search functionality, please visit UL's [eQTM Family of Databases](#).
Click on a product designation for complete information.

[Page Bottom](#)

Wiring, Printed - Component

See General Information for Wiring, Printed - Components

O-LEADING SUPPLY CHAIN CO LIMITED
Fortune Building, Nanheng West Road
Room 1313
Huizhou, Guangdong 516211, CHINA

E490354

	Cond Width				Max				Max			
	Min	Min	Cond		SS/	Area	Solder		Oper	Flame	Heat	
	Min	Edge	Thk	DS/	Diam	Limits	Temp				UL796	
Type	mm(In)	mm(In)	mic(mil)	DSO	mm(In)	C	sec	C	Class	DSR	I	
Huileyer (mass laminate) printed wiring boards.												
O-LEADING-401												
	0.2 (0.004)	0.3 (0.012)	34 (1.34)	D6	12.7 (0.5)	260	10	230	V-0	-	-	
O-LEADING-407												
	0.08 (0.003)	0.2 (0.008)	17 (0.67)	D5	9.7 (0.4)	260	10	170	V-0	AB	-	
Huileyer printed wiring boards.												
O-LEADING-408												
	0.125 (0.005)	0.125 (0.005)	12 (0.47)	D6	50.8 (2.0)	260	20	130	V-0	AB	-	
Single layer printed wiring boards.												
O-LEADING-002												
	0.76 (0.015)	1.14 (0.045)	34 (1.34)	D5	19.1 (0.8)	260	10	105	V-0	AB	-	
O-LEADING-003												
	0.38 (0.015)	1.14 (0.045)	34 (1.34)	D5	19.1 (0.8)	260	10	130	V-0	AB	-	
O-LEADING-033												
	0.15 (0.006)	0.3 (0.012)	34 (1.34)	D5	25.4 (1.0)	260	10	120	V-0	AB	-	
O-LEADING-205												
	0.2 (0.004)	0.3 (0.012)	34 (1.34)	D6	69.8 (2.7)	260	10	130	V-0	AB	-	
O-LEADING-206												
	0.15 (0.006)	0.33 (0.013)	17 (0.67)	D5	69.8 (2.7)	260	10	130	V-0	AB	-	

* - CTI marking is optional and may be marked on the printed wiring board.

Making: Company name or file number and type designation. May be followed by a suffix to denote factory identification or burning test designation.
Last updated on 2017-01-27

Questions? Print this page Terms of Use Page Top

Implications: Using this information to identify the product is not a warranty. ZPMV2.E490354 is a wiring, printed - component. 10



Test Report

No. CAVE1805164701

Date: 03 Apr 2018

Page 2 of 8

Test Results:

Test Part Description:

Specimen No. **SGS Sample ID** **Description**
SN1 CAN18-051647.001 Green "PCB"

Remarks:

- (1) 1 mg/kg = 1 ppm = 0.0001%
- (2) MDL = Method Detection Limit
- (3) ND = Not Detected (< MDL)
- (4) "-" = Not Regulated

RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU

Test Method: With reference to IEC 62321-4:2013+A1:2017, IEC 62321-5:2013, IEC 62321-7-2:2017, IEC 62321-6:2015 and IEC 62321-8:2017, analyzed by ICP-OES, UV-Vis and GC-MS.

Test Item(s)	Limit	Unit	MDL	Det
Cadmium (Cd)	100	mg/kg	2	ND
Lead (Pb)	1,000	mg/kg	2	9
Mercury (Hg)	1,000	mg/kg	2	ND
Hexavalent Chromium (CrVI)	1,000	mg/kg	8	ND
Sum of PBBs	1,000	mg/kg	-	ND
Monobromodiphenyl ether	-	mg/kg	5	ND
Dibromodiphenyl ether	-	mg/kg	5	ND
Tribromodiphenyl ether	-	mg/kg	5	ND
Tetrabromodiphenyl ether	-	mg/kg	5	ND
Pentabromodiphenyl ether	-	mg/kg	5	ND
Hexabromodiphenyl ether	-	mg/kg	5	ND
Heptabromodiphenyl ether	-	mg/kg	5	ND
Octabromodiphenyl ether	-	mg/kg	5	ND
Nonabromodiphenyl ether	-	mg/kg	5	ND
Decabromodiphenyl ether	-	mg/kg	5	ND
Sum of PBDEs	1,000	mg/kg	-	ND
Monobromodiphenyl ether	-	mg/kg	5	ND
Dibromodiphenyl ether	-	mg/kg	5	ND
Tribromodiphenyl ether	-	mg/kg	5	ND
Tetrabromodiphenyl ether	-	mg/kg	5	ND
Pentabromodiphenyl ether	-	mg/kg	5	ND



SGS is a global leader in testing, inspection and certification services. We are committed to providing our clients with the highest quality of service and the most reliable results. Our services are recognized by the international community and are a key factor in the success of many of the world's leading companies. SGS is a member of the ISO 9001:2015 standard and is committed to continuous improvement. For more information, please visit our website at www.sgs.com.

5. PCB 制程流程图

设计 → 开料 → 钻孔 → 电镀 → AOI → 阻焊 → 贴片 → 回流 → PTH → 电镀 → 测试 → 包装
设计 → 开料 → AOI → 钻孔 → 贴片 → 回流 → E / T → 测试