

PCB
 16-layer PCB

Material	FR-4	Thickness	0.5mm - 5mm
Min Thickness	0.2mm	Min Drill	0.2mm
Surface Finish	OSP / HASL	Min Pad	0.15mm
LED	Yes	Min Hole	0.2mm
Standards	ISO9001, UL, RoHS, SGS	Q / CTN	10PCS-100PCS
Weight	0.01 kg - 5 kg	MOQ	10
PCBA	Yes	Min Pad	0.2mm
Price			\$ 0.1 - \$ 10
Design	Yes	Min Hole	0.01mm-10mm


Lead Time	16 days
Lead Time	7-12 days

PCB

PCB

	2014		2015-2016		2017-2018	
	Min	Max	Min	Max	Min	Max
Thickness	32	42	38	44	42	48
Min Thickness (µm)	50/50	40/45	40/45	40/40	35/40	35/35
PTH	00:15	00:10	00:15	00:10	00:15	00:10
N + C + N	4 + C + 4	5 + C + 5	5 + C + 5	6 + C + 6	5 + C + 5	6 + C + 6
Min Thickness (µm)	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6
Min Thickness (µm)	50	40	40	30	40	30
Min Thickness (µm)	75	65	65	50	50	40
Material	FR4, Megtron, Nelco, Rogers					
Surface Finish	OSP	-	OSP	-	OSP	-
Design	HASL, ENIG, OSP					

O-LEADING
To Be Reliable. To Be Valuable

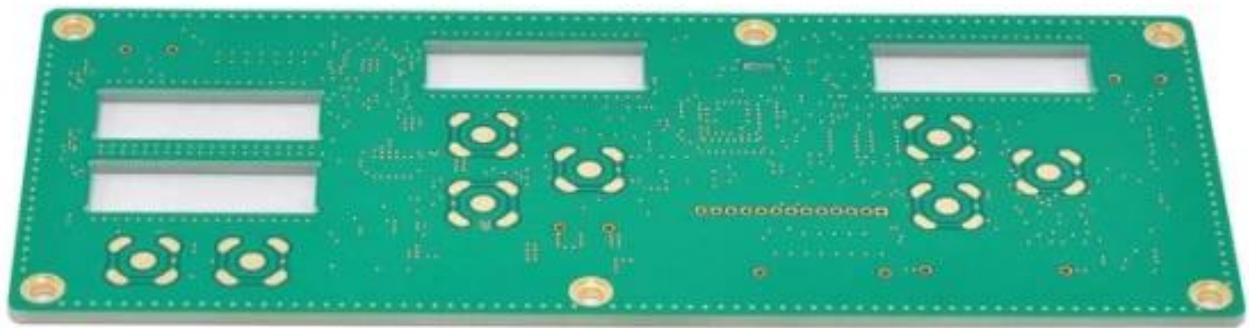

www.o-leading.com