

PCB
 16-layer PCB

Material	FR-4	Thickness	0.5mm - 5mm
Min. Thickness	0.2mm	Min. Drill	0.2mm
Surface Finish	OSP / HASL	Min. Pad	0.15mm
LED	LED compatible	Min. Annular Ring	0.1mm
Standards	ISO9001, UL, RoHS, SGS	Q / CTN	10PCS-100PCS
Weight	0.01 kg - 5 kg	MOQ	10
PCBA	PCBA / PCB	Min. Drill	0.2mm
Price		Unit Price	\$ 0.1 - \$ 10
Design	Design	Min. Drill	0.01mm-10mm


Lead Time	16-layer PCB
Lead Time	7-12days

PCB

PCB

Item	2014		2015-2016		2017-2018	
	Min	Max	Min	Max	Min	Max
Min. Drill	32	42	38	44	42	48
Min. Annular Ring	50/50	40/45	40/45	40/40	35/40	35/35
Min. Pad	00:15	00:10	00:15	00:10	00:15	00:10
PTH	14	16	16	18	18	20
N + C + N	4 + C + 4	5 + C + 5	5 + C + 5	6 + C + 6	5 + C + 5	6 + C + 6
Min. Drill	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6
Min. Pad		-		-		-
Min. Annular Ring	50	40	40	30	40	30
Min. Pad	75	65	65	50	50	40
Material	FR4, Megtron, Nelco, Rogers					
Surface Finish		-		-		-
Design	HASL, ENIG, OSP					

O-LEADING
To Be Reliable. To Be Valuable

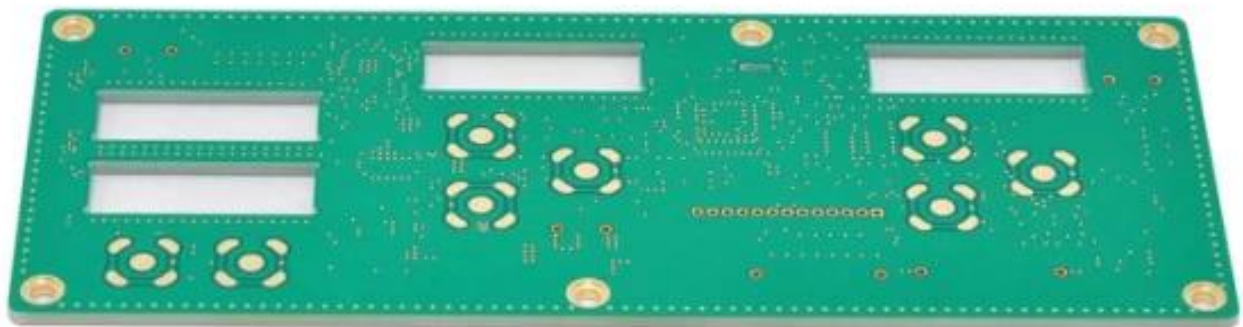

www.o-leading.com