

PCB SPECIFICATION

Material	FR-4	Thickness	0.5oz~5oz
Min. Thickness	0.2mm	Min. Drill	0.2mm
Surface Finishes	OSP, HASL	Min. Drill	0.1/5mm
Plating		Plating	
Standards	ISO9001, UL, RoHS, SGS	Q / CTN	10PCS-100PCS
Weight	0.01kg -5kg	MOQ	10/
PCB/PCBA	PCB/PCBA	Min. Thickness	0.2mm
Price		Price	\$ 0.1 / \$ 10
Dimensions		Dimensions	0.01m3-10m3

Lead Time & Delivery


Quantity	16000 OEM
Lead Time	7-12days

Notes

**160000 OEM PCB SPECIFICATION**

	2014		2015-2016		2017-2018	
	Drill	Plating	Drill	Plating	Drill	Plating
Drill	32	42	38	44	42	48
Drill/Plating μm	50/50	40/45	40/45	40/40	35/40	35/35
Drill/Plating mm	0.15	0.10	0.15	0.10	0.15	0.10
PTH	14/1	16/1	16/1	18/1	18/1	20/1
N + C + N	4 + C + 4	5 + C + 5	5 + C + 5	6 + C + 6	5 + C + 5	6 + C + 6
Drill	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6
Plating		-		-		-
Min. Drill μm	50	40	40	30	40	30
Min. Plating μm	75	65	65	50	50	40
Drill/Plating		-		-		-
Material	FR4, Megtron, Nelco, Rogers, Heavy Copper					
PCB		-		-		-
Finishes	HASL, ENIG, OSP					

**O-LEADING**  
To Be Reliable, To Be Valuable

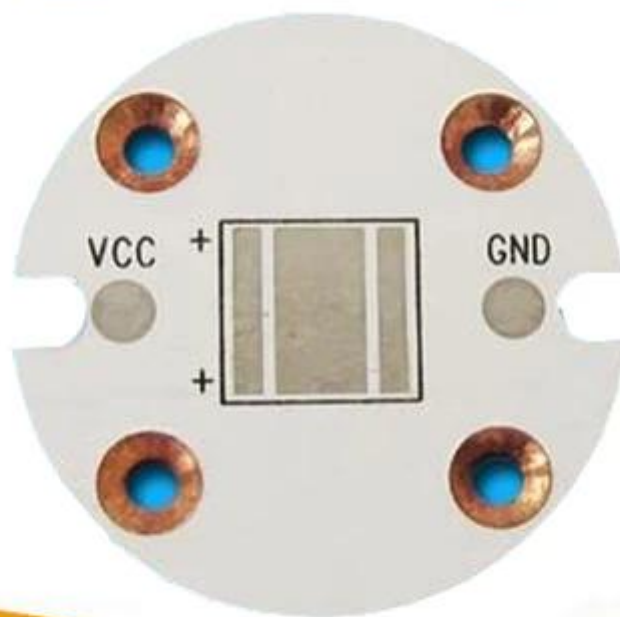

[www.o-leading.com](http://www.o-leading.com)

[OEM PCB](#) [PCB](#)