

O-leading

10 1000 1000 1000 PCB 10000000. 1000 100, 100, 100 PCB, 1000 PCB 1000 MCPCB 100000. 1000 100 1000 1000 1000 1000. 24 100 100 S / S, 48-96 100 100 1000 4-8 100.
(1000000 PCB 1000000)


1000 100 100 .025 AVG, .020 1000 1000 10000000

100 1000 100 100, 25 PCS / bag, 1000 100000 100 1000 100 1000 1000 100000

1000 1000 1000 10000000.

100 100

PCB P / N	Q501805-A
1000 100	2L
100	1000 1000
100 thk	0.50mm
100 thk	1/1 100
100 100 100 100	1.6mm
100 100 (100)	4
100 w / s	/
100000 100. Y / N (100 %)	100
100 1000	100000
100 1000 100 1000	100 100
100 100 100	1000 X (mm) : 109; 1000 Y (mm) : 50
1000	1000 X (mm) : 109; 1000 Y (mm) : 50; UPS 100 : 1
1000	100
1000 / 100	CNC

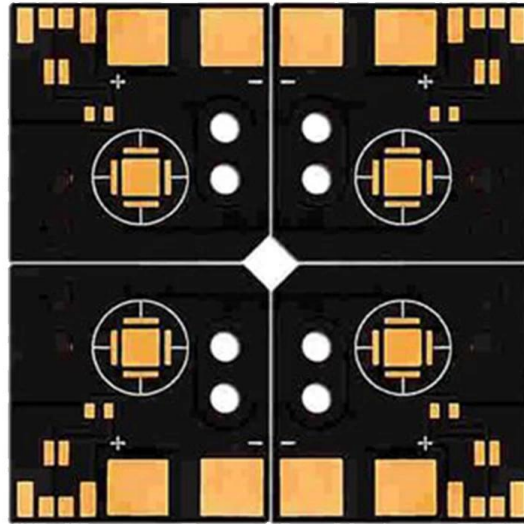

www.o-leading.com

PCB







2017/26 2016VZL430354 - Wiring, Printed - Component

ONLINE CERTIFICATIONS DIRECTORY

ZPMV2.E490354
Wiring, Printed - Component

For enhanced search functionality, please visit UL's [iQ™ Family of Databases](#).
Click on a product designation for complete information.
[Page Bottom](#)

Wiring, Printed - Component

See General Information for Wiring, Printed - Components

O-LEADING SUPPLY CHAIN CO LIMITED
Fortune Building, Nanheng West Road
Room 1313
Huizhou, Guangdong 516211, CHINA

E490354

	Cond Width				Max				Max			
	Min	Min	Cond		SS/	Area	Solder		Oper	Flame	Heat	
	Min	Edge	Thk	DS/	Diam	Limits	Temp				UL796	
Type	mm(In)	mm(In)	mic(mil)	DSO	mm(In)	C	sec	C	Class	DSR	I	
Huileyer (mass laminate) printed wiring boards.												
O-LEADING-401												
	0.2 (0.004)	0.3 (0.012)	34 (1.34)	D6	12.7 (0.5)	260	10	230	V-0	-	-	
O-LEADING-407												
	0.08 (0.003)	0.2 (0.008)	17 (0.67)	D5	9.7 (0.4)	260	10	170	V-0	AB	-	
Huileyer printed wiring boards.												
O-LEADING-408												
	0.125 (0.005)	0.125 (0.005)	12 (0.47)	D6	50.8 (2.0)	260	20	130	V-0	AB	-	
Single layer printed wiring boards.												
O-LEADING-002												
	0.76 (0.015)	1.14 (0.045)	34 (1.34)	D5	19.1 (0.8)	260	10	105	V-0	AB	-	
O-LEADING-003												
	0.38 (0.015)	1.14 (0.045)	34 (1.34)	D5	19.1 (0.8)	260	10	130	V-0	AB	-	
O-LEADING-033												
	0.15 (0.006)	0.3 (0.012)	34 (1.34)	D5	25.4 (1.0)	260	10	120	V-0	AB	-	
O-LEADING-205												
	0.2 (0.004)	0.3 (0.012)	34 (1.34)	D6	69.8 (2.7)	260	10	130	V-0	AB	-	
O-LEADING-206												
	0.15 (0.006)	0.33 (0.013)	17 (0.67)	D5	69.8 (2.7)	260	10	130	V-0	AB	-	

* - CTI marking is optional and may be marked on the printed wiring board.

Making: Company name or file number and type designation. May be followed by a suffix to denote factory identification or burning test designation.
Last updated on 2017-01-27

Questions? Print this page Terms of Use Page Top

Implications: Using this information to verify the accuracy of the data is the user's responsibility. ZPMV2.E490354 - Wiring, Printed - Component



Test Report

No. CANEC1805164701

Date: 03 Apr 2018

Page 2 of 8

Test Results:

Test Part Description:

Specimen No. **SGS Sample ID** **Description**
SN1 CAN18-051647.001 Green "PCB"

Remarks:

- (1) 1 mg/kg = 1 ppm = 0.0001%
- (2) MDL = Method Detection Limit
- (3) ND = Not Detected (< MDL)
- (4) "-" = Not Regulated

RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU

Test Method: With reference to IEC 62321-4:2013+A1:2017, IEC 62321-5:2013, IEC 62321-7-2:2017, IEC 62321-6:2015 and IEC 62321-8:2017, analyzed by ICP-OES, UV-Vis and GC-MS.

Test Item(s)	Limit	Unit	MDL	Det
Cadmium (Cd)	100	mg/kg	2	ND
Lead (Pb)	1,000	mg/kg	2	9
Mercury (Hg)	1,000	mg/kg	2	ND
Hexavalent Chromium (CrVI)	1,000	mg/kg	8	ND
Sum of PBBs	1,000	mg/kg	-	ND
Monobromodiphenyl ether	-	mg/kg	5	ND
Dibromodiphenyl ether	-	mg/kg	5	ND
Tribromodiphenyl ether	-	mg/kg	5	ND
Tetrabromodiphenyl ether	-	mg/kg	5	ND
Pentabromodiphenyl ether	-	mg/kg	5	ND
Hexabromodiphenyl ether	-	mg/kg	5	ND
Heptabromodiphenyl ether	-	mg/kg	5	ND
Octabromodiphenyl ether	-	mg/kg	5	ND
Nonabromodiphenyl ether	-	mg/kg	5	ND
Decabromodiphenyl ether	-	mg/kg	5	ND
Sum of PBDEs	1,000	mg/kg	-	ND
Monobromodiphenyl ether	-	mg/kg	5	ND
Dibromodiphenyl ether	-	mg/kg	5	ND
Tribromodiphenyl ether	-	mg/kg	5	ND
Tetrabromodiphenyl ether	-	mg/kg	5	ND
Pentabromodiphenyl ether	-	mg/kg	5	ND



SGS is pleased to announce that it has been awarded the ISO 9001:2015 certification for its Quality Management System (QMS) for the production of its products. This certification is a testament to the company's commitment to excellence in quality management and its dedication to providing high-quality products and services to its customers. The certification is valid for five years and will be renewed upon successful completion of the next audit. SGS is proud to be a member of the ISO 9001:2015 family of standards and is committed to continuous improvement and innovation in its products and services.

□□ □ □□

□□ □□ □□	16 □ □□ OEM pcb □□ □□□□
□□ □□ □□	7-12 □



□□□□ □□

1. O-Leading□ □□□ □□ □□□□□? [□□□□□□□□□□□□](#)

□□□ □□□ □□□ □□ □□□□□.

1. □□□□□ ISO 9001 : 2008 □□□ □□ □□□□ □□□□□.

□□ □□ □□□□□□□ □□□□ □□

3. □□□ □□□ □□ □ □□. □ : □□□ □□□, X-ray □□, AOI (Automated Optical Inspector) □ ICT (in-circuit testing).

4. □□ □□ □□ □□□□□ □□ □□ □□ □□ □

5. □□ □□ □□ □ □□

2. O-Leading□ □□□ □□ □□□□ □□□□□?

□□ 10 □ □□ □□ □□□ (□ : □□, □□ □□)□ □□□ □ □, □ □ □□ □ □□ □□□□□. □□ □□ □□□□ □□ □□□□ 31 % □□□□□□. □□ □□ □ □□ □□□□□. □□□ O-Leading□ □□□ □□□□□ □□□□□□. □□ □□ □□, □□□ □□ □ □□□ □□□□□ □□□ □□□ □□□□□. □□□ □□□ □□□ □□ □□□□ □□□□ □□□□ □□□□.

□□□ □□□□ □□ □□□□□ □□□□. □□□ □□□□□ □□□ □□ □ □□□ □□□ □□□□ □□ □□□ □ □□□□.

3. O-Leading□ □□ □□□ □□□ □□ □ □ □□□□?

□□ FR4, □ TG □ □ □□□ □□, Rogers, Arlon, Telfon, □□□□ / □□ □□ □□, PI □

4. PCB 圖檔 輸出 圖檔 圖檔?

Gerber 274-X 圖檔 圖檔 圖檔 圖 圖 圖檔. 圖 Cam350, CAD, Protel 99se, PADS, DXP 圖 Eagle 圖 圖 圖 圖檔.

5. 圖 PCB 圖檔 圖檔 圖 圖檔?

圖 圖 → 圖 圖 圖 → 圖 圖 → 圖 AOI → 圖 圖 → 圖 圖 圖 圖 → 圖 → PTH → 圖 圖 → 圖 圖 圖 → 圖 圖
→ 圖 圖 → 圖 AOI → 圖 圖 → 圖 圖 圖 → 圖 圖 → 圖 → E / T → 圖 圖.