

PCB

PCB Specifications

Material	FR-4, 0.2mm	Thickness	0.5oz ~ 5oz
Min. Thickness	0.2mm	Min. Drill	0.2mm
Surface Treatment	OSP, HASL	Lead Thickness	0.1-5mm
Plating	LED, Silver, Gold, Black	Plating	Various PCB
Standards	ISO9001, UL, RoHS, SGS	Q / CTN	10PCS-100PCS
Weight	0.01kg ~ 5kg	MOQ	10pcs
Min. Thickness	0.2mm	Min. Drill	0.2mm
Color	Yellow	Price	\$ 0.1 - \$ 10
Lead Time	0.01m3-10m3		


PCB & PCB

16 PCB OEM pcb	7-12
----------------	------

PCB

16 PCB OEM pcb

	2014		2015 ~ 2016		2017 ~ 2018	
	mm	mm	mm	mm	mm	mm
Thickness	32	42	38	44	42	48
Thickness / (μm)	50/50	40/45	40/45	40/40	35/40	35/35
PTH (mm)	0.15	0.10	0.15	0.10	0.15	0.10
PTH	14 : 1	16 : 1	16 : 1	18 : 1	18 : 1	20 : 1
N + C + N	4 + C + 4	5 + C + 5	5 + C + 5	6 + C + 6	5 + C + 5	6 + C + 6
Min. Thickness (μm)	50	40	40	30	40	30
Min. Thickness (μm)	75	65	65	50	50	40
Material	FR4, Megtron, Nelco, Rogers, Heavy Copper					
PCB						
Surface Treatment	HASL, ENIG, OSP, Silver, Gold, Black, Copper, Nickel, etc.					

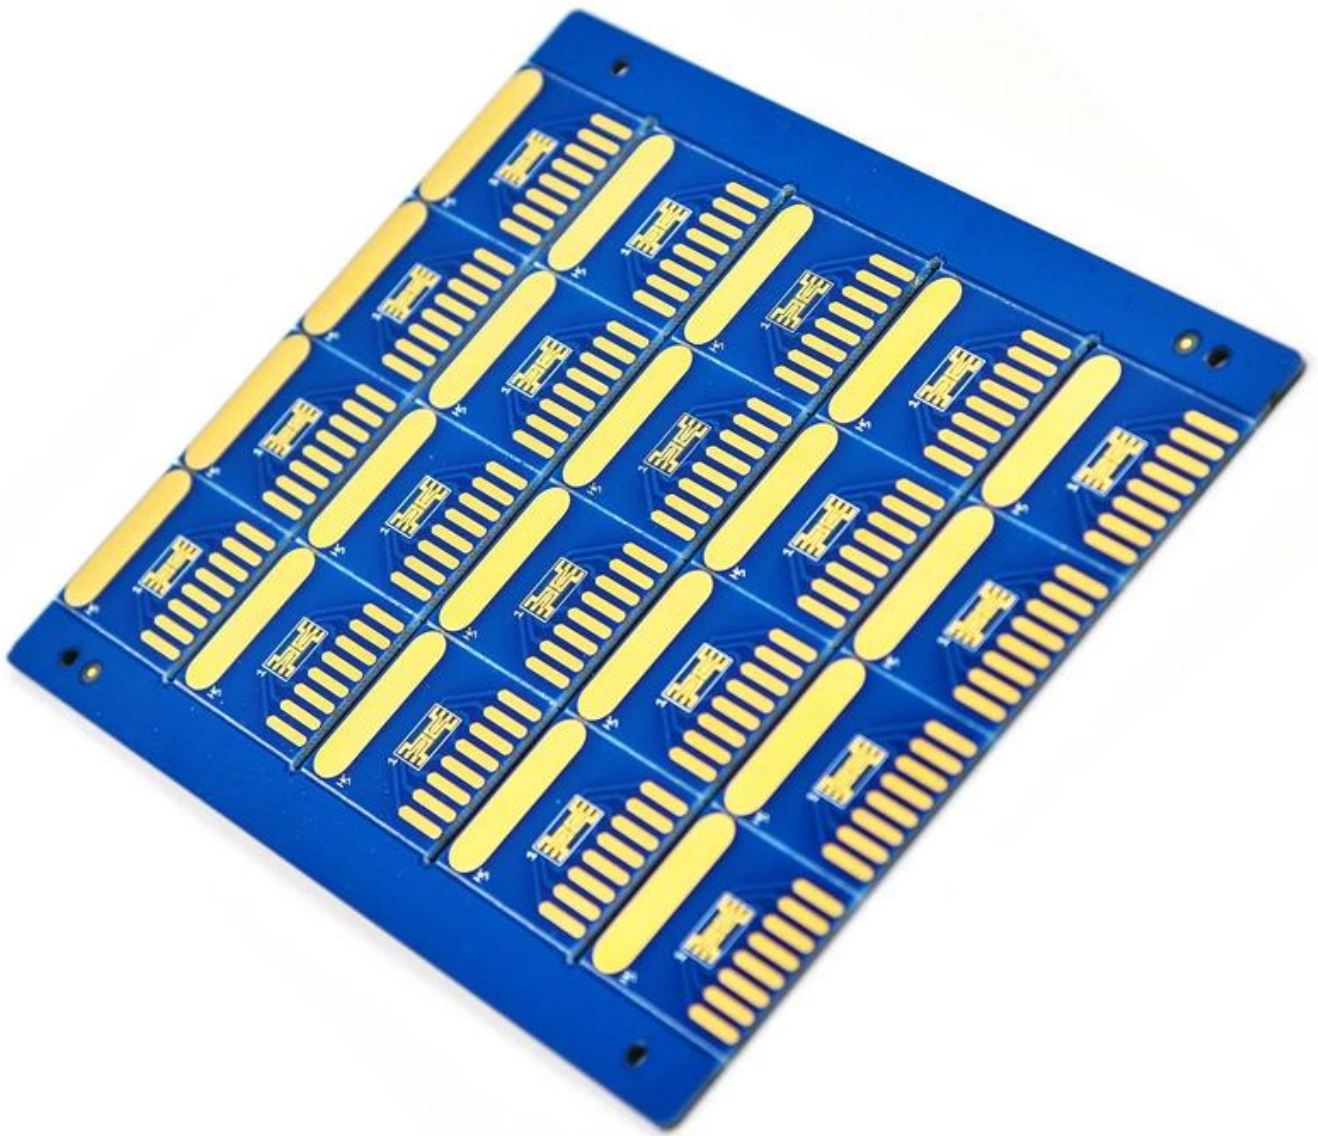

pcb, led_pcb, pcb