

PCB

PCB Specifications

Material	FR-4, 0.2mm	Thickness	0.5oz ~ 5oz
Min. Thickness	0.2mm	Min. Drill	0.2mm
Surface Finish	OSP, HASL	Lead Thickness	0.1-5mm
LED, SMD, etc.	LED, SMD, etc.	PCB Type	Single PCB
Standards	ISO9001, UL, RoHS, SGS	Q / CTN	10PCS-100PCS
Weight	0.01kg ~ 5kg	MOQ	10pcs
PCB Type	Single PCB, Double PCB	Min. Drill	0.2mm
Color	Yellow	Price	\$ 0.1 - \$ 10
Lead Time	7-12 days	Lead Time	0.01m3-10m3

PCB & Lead

16 OEM PCB	16 OEM PCB
7-12 days	


PCB : [oem pcb](#)

PCB

16 OEM PCB

	2014		2015 ~ 2016		2017 ~ 2018	
	mm	mm	mm	mm	mm	mm
Thickness	32	42	38	44	42	48
Thickness / (mm)	50/50	40/45	40/45	40/40	35/40	35/35
PTH (mm)	0.15	0.10	0.15	0.10	0.15	0.10
PTH	14 : 1	16 : 1	16 : 1	18 : 1	18 : 1	20 : 1
N + C + N	4 + C + 4	5 + C + 5	5 + C + 5	6 + C + 6	5 + C + 5	6 + C + 6
Min. Drill	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6
Min. Drill (mm)	50	40	40	30	40	30
Min. Drill (mm)	75	65	65	50	50	40
Material	FR4, Megtron, Nelco, Rogers, Heavy Copper					
PCB Type						
Surface Finish	HASL, ENIG, OSP, etc.					

O-LEADING
To Be *Reliable*, To Be *Valuable*

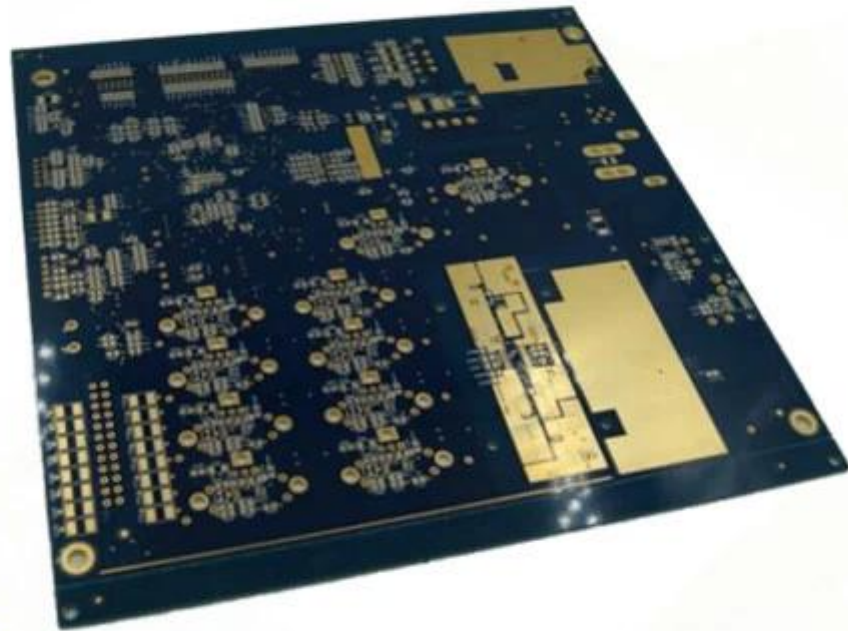

www.o-leading.com