



COPPER PLATE HOLES MINIMUM .025 AVG, .020 MIN.. HOLES MAY NOT BE PLUGGED
Special requirement:ENIG, Impedance: Tol: +/-7%, Press fit hole

Pack with colorless transparent bubble film ,25 PCS/ bag, put desiccant in flank, put humidity indicator card on top side


Layer structure

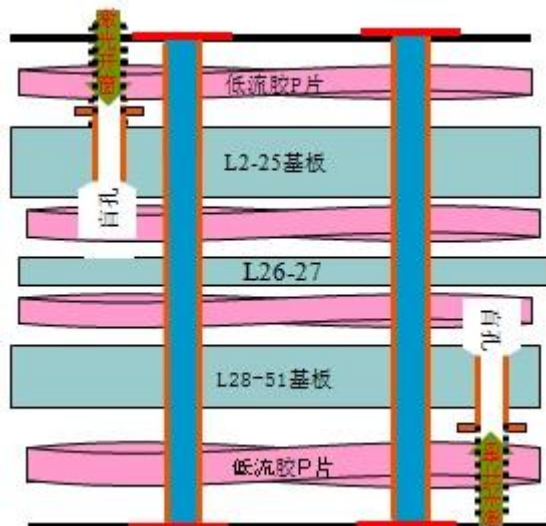


O-LEADING
To Be Reliable, To Be Valuable

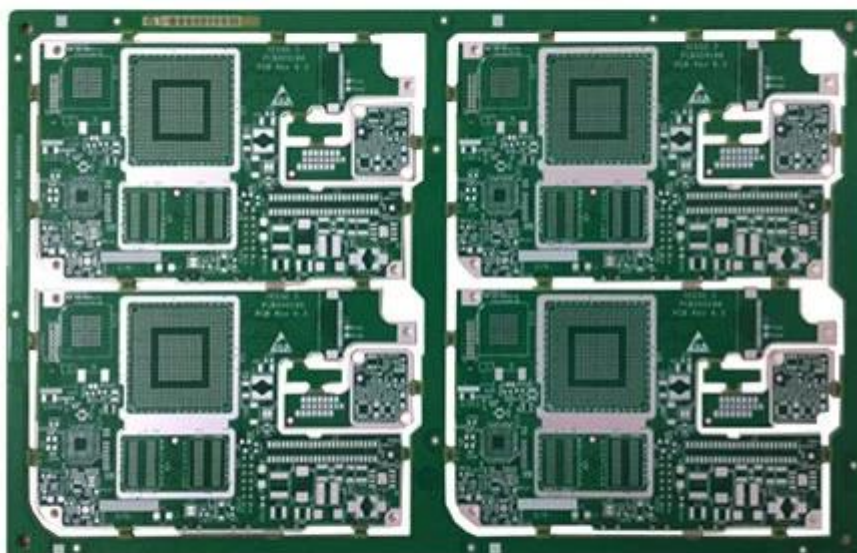

www.o-leading.com

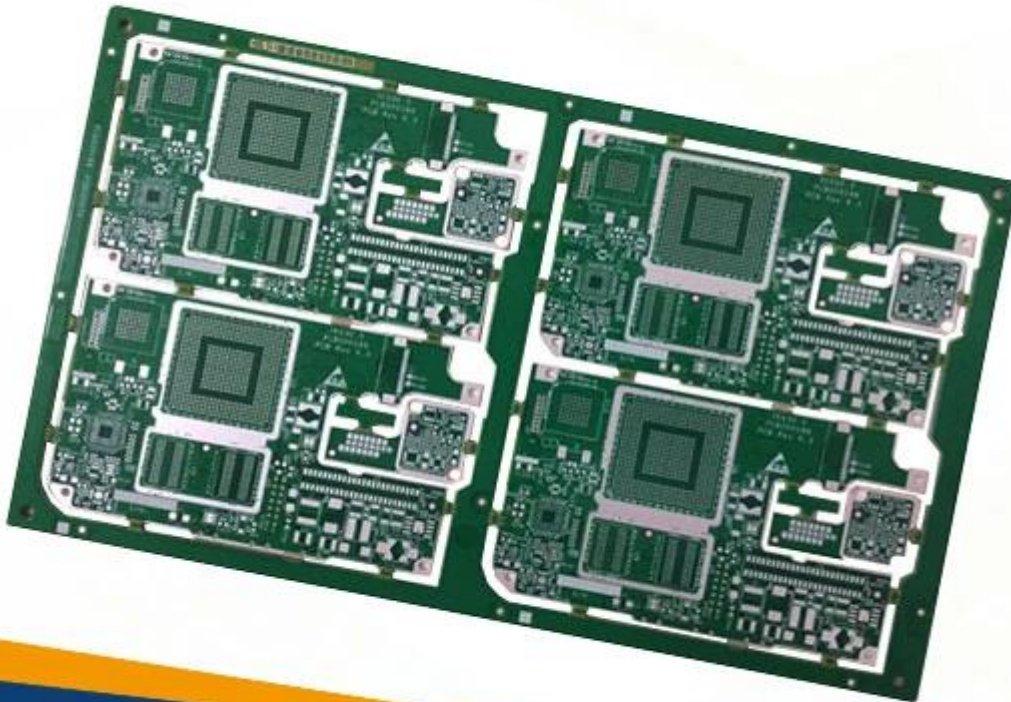

www.o-leading.com

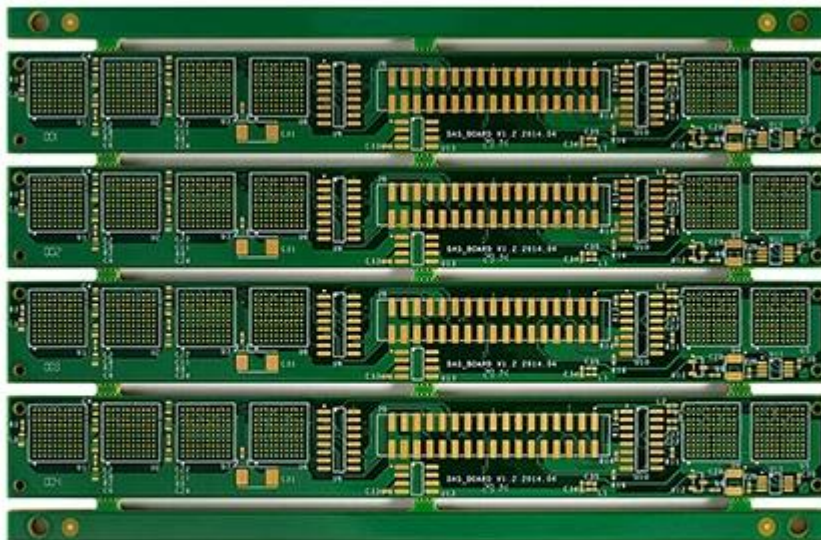

www.o-leading.com

[PCB with imedance control, Printed circuit board in china](#)