

PCB

PCB Specifications

Material	FR-4, FR-5	Thickness	0.5mm - 3.0mm
Min. Thickness	0.2mm	Min. Drill	0.2mm
Surface Finish	OSP, HASL	Panel Size	0.1-5mm
LED, SMD, BGA, etc.		PCB Type	Single / Double Sided PCB
Standards	ISO9001, UL, RoHS, SGS	Q / CTN	10PCS-100PCS
Weight	0.01kg ~ 5kg	MOQ	10pcs
PCB / PCB Assembly		Min. Drill	0.2mm
Color	Yellow, Green, Blue, Red	Price	\$ 0.1 - \$ 10
Quantity		Volume	0.01m ³ -10m ³


PCB & PCB


PCB Type	16 Layer OEM PCB
Lead Time	7-12 Days

PCB

16 Layer OEM PCB

	2014		2015 ~ 2016		2017 ~ 2018	
	mm	mm	mm	mm	mm	mm
Core Thickness	32	42	38	44	42	48
Core / Prepreg (µm)	50/50	40/45	40/45	40/40	35/40	35/35
Core / Prepreg (mm)	0.15	0.10	0.15	0.10	0.15	0.10
PTH	14 : 1	16 : 1	16 : 1	18 : 1	18 : 1	20 : 1
N + C + N	4 + C + 4	5 + C + 5	5 + C + 5	6 + C + 6	5 + C + 5	6 + C + 6
Core / Prepreg	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6
Core / Prepreg	-	-	-	-	-	-
Min. Core Thickness (µm)	50	40	40	30	40	30
Min. Prepreg Thickness (µm)	75	65	65	50	50	40
Core / Prepreg	-	-	-	-	-	-
Material	FR4, Megtron, Nelco, Rogers, Heavy Copper					
PCB Type	-	-	-	-	-	-
Surface Finish	HASL, ENIG, OSP, Electroless Ni, Electroless Ni/P, Electroless Ni/Cu, Electroless Ni/Au					

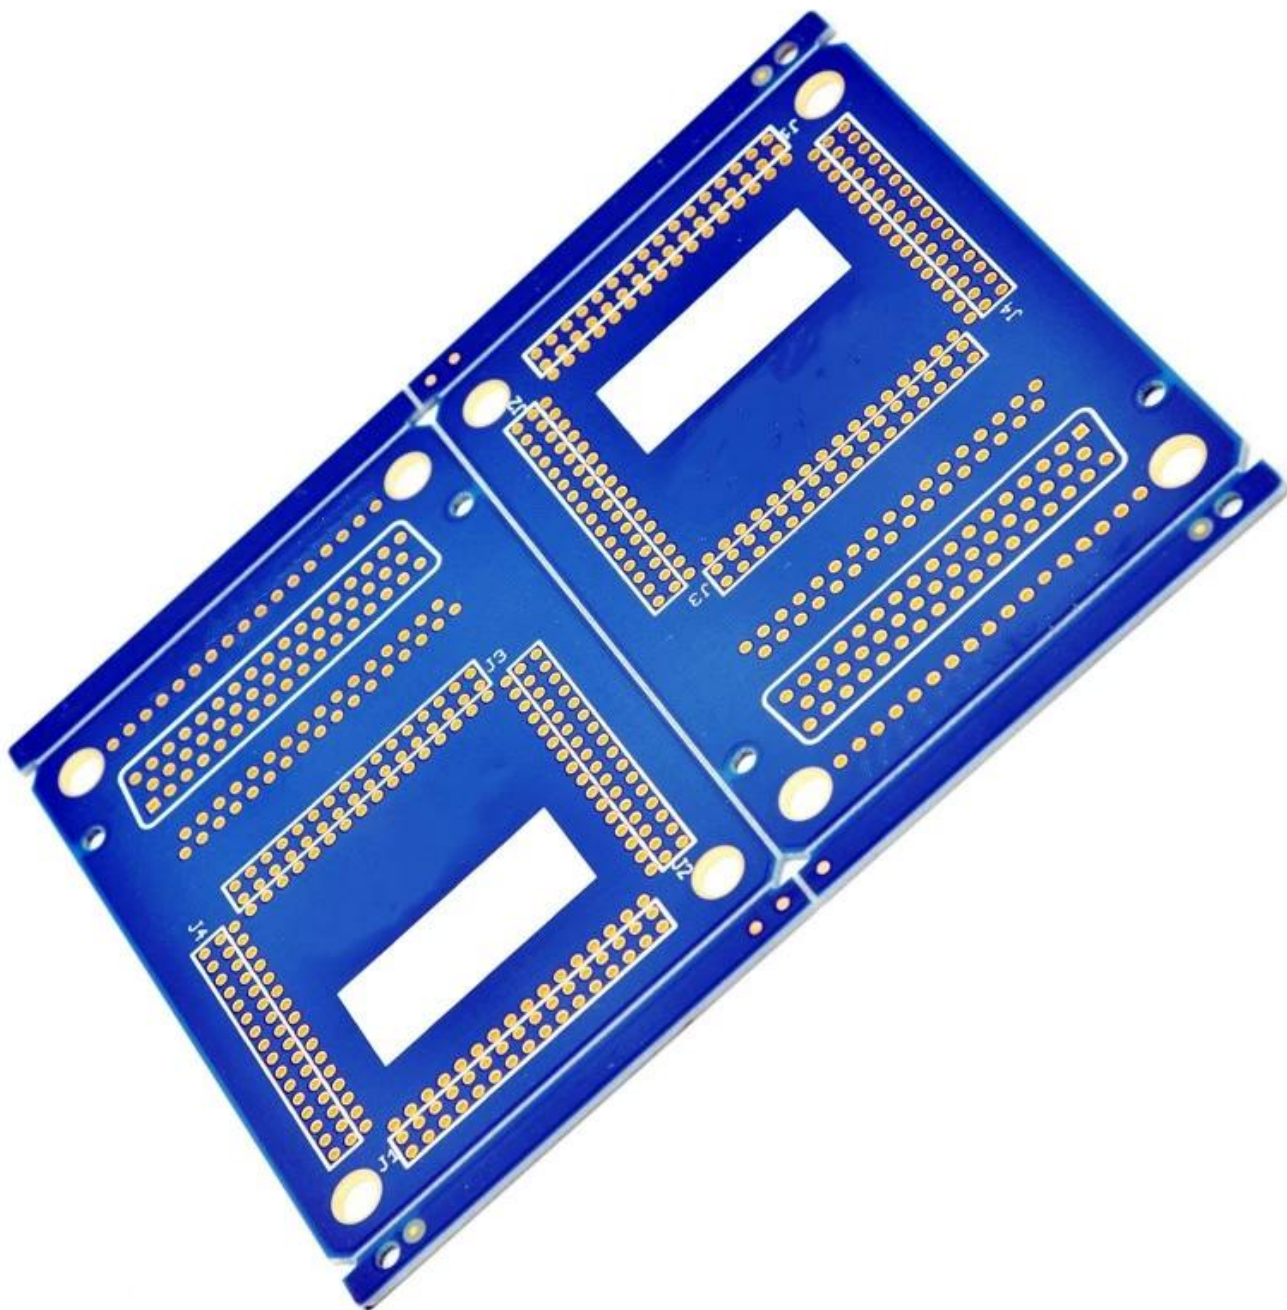

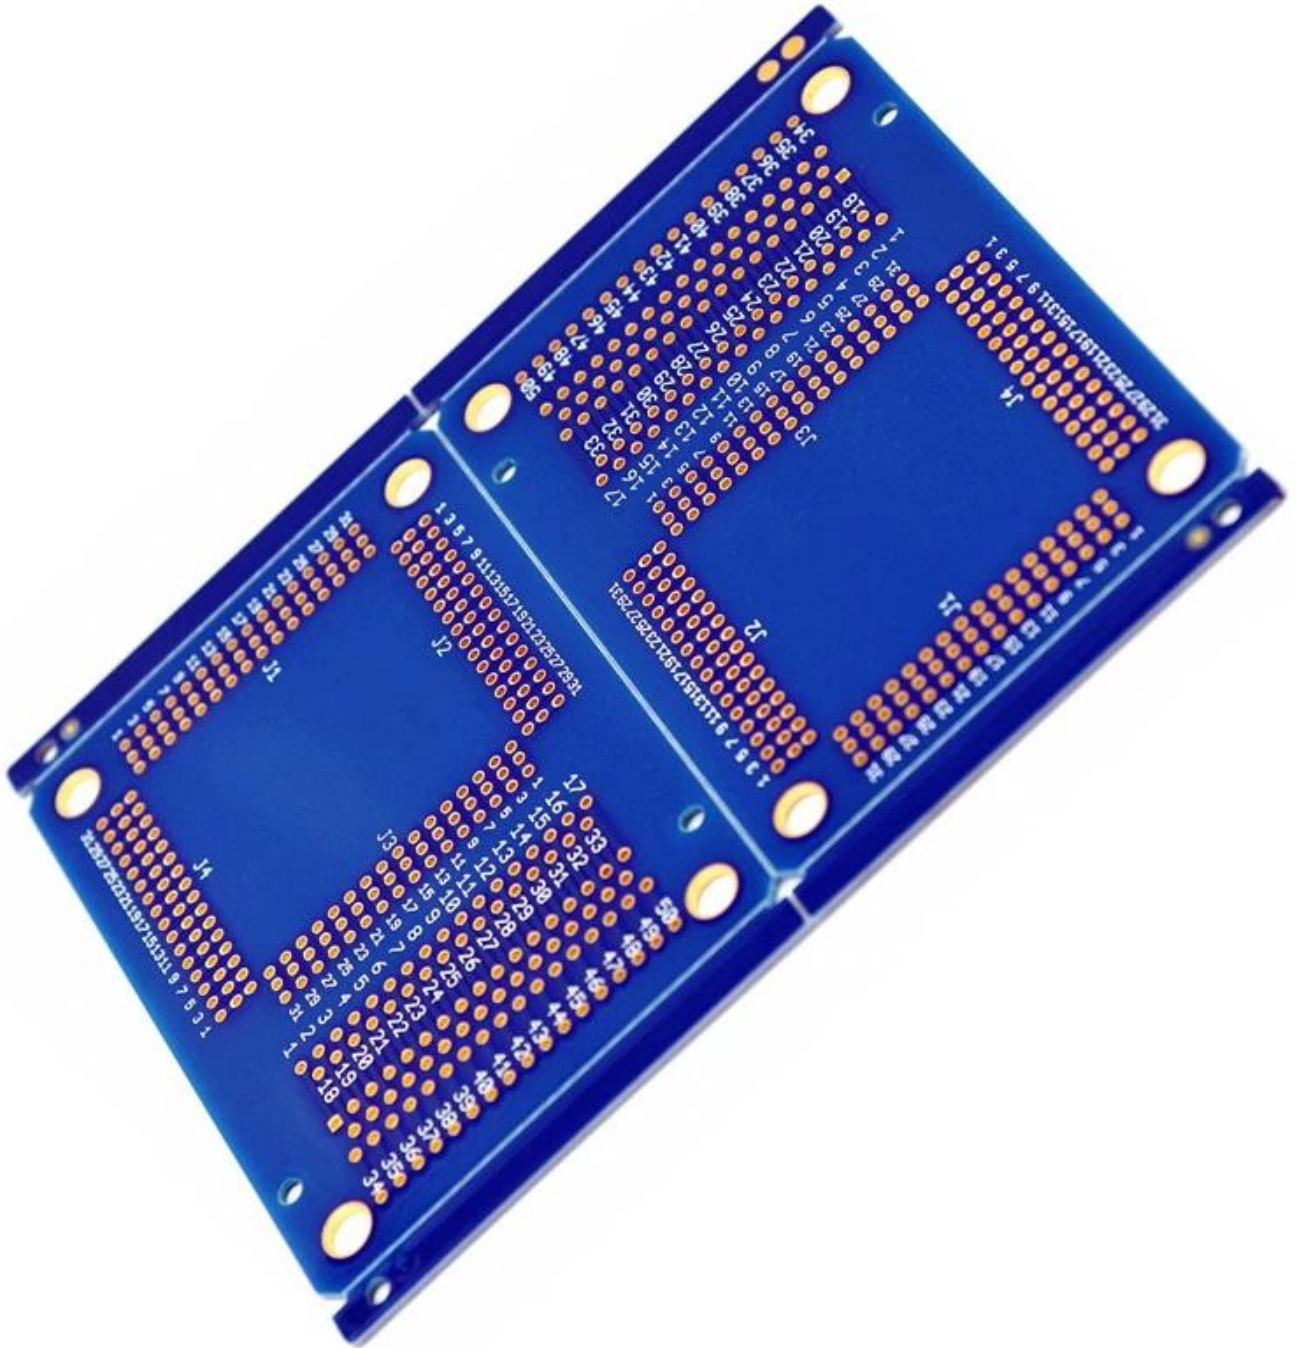

[oem_pcb](#) 00 00 00