

PCB

PCB Specifications

Material	FR-4, 2000	Thickness	0.5oz ~ 5oz
Min. Thickness	0.2mm	Min. Drill	0.2mm
Surface Treatment	OSP, HASL	Panel Size	0.1-5mm
LED, SMD, etc.	LED, SMD, etc.	PCB Type	Single PCB
Standards	ISO9001, UL, RoHS, SGS	Q / CTN	10PCS-100PCS
Weight	0.01kg ~ 5kg	MOQ	10pcs
Min. Thickness	0.2mm	Min. Drill	0.2mm
Color	.yellow	Price	\$ 0.1- \$ 10
Min. Thickness	0.01m3-10m3		


PCB & PCB


16 PCB OEM pcb	7-12
----------------	------

PCB

16 PCB OEM pcb

	2014		2015 ~ 2016		2017 ~ 2018	
	32	42	38	44	42	48
Thickness / (μm)	50/50	40/45	40/45	40/40	35/40	35/35
Thickness (mm)	0.15	0.10	0.15	0.10	0.15	0.10
PTH	14 : 1	16 : 1	16 : 1	18 : 1	18 : 1	20 : 1
N + C + N	4 + C + 4	5 + C + 5	5 + C + 5	6 + C + 6	5 + C + 5	6 + C + 6
5 + 2 + 5	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6
Min. Thickness (μm)	50	40	40	30	40	30
Min. Thickness (μm)	75	65	65	50	50	40
Material	FR4, Megtron, Nelco, Rogers, Heavy Copper					
PCB Type						
Surface Treatment	HASL, ENIG, OSP, etc.					

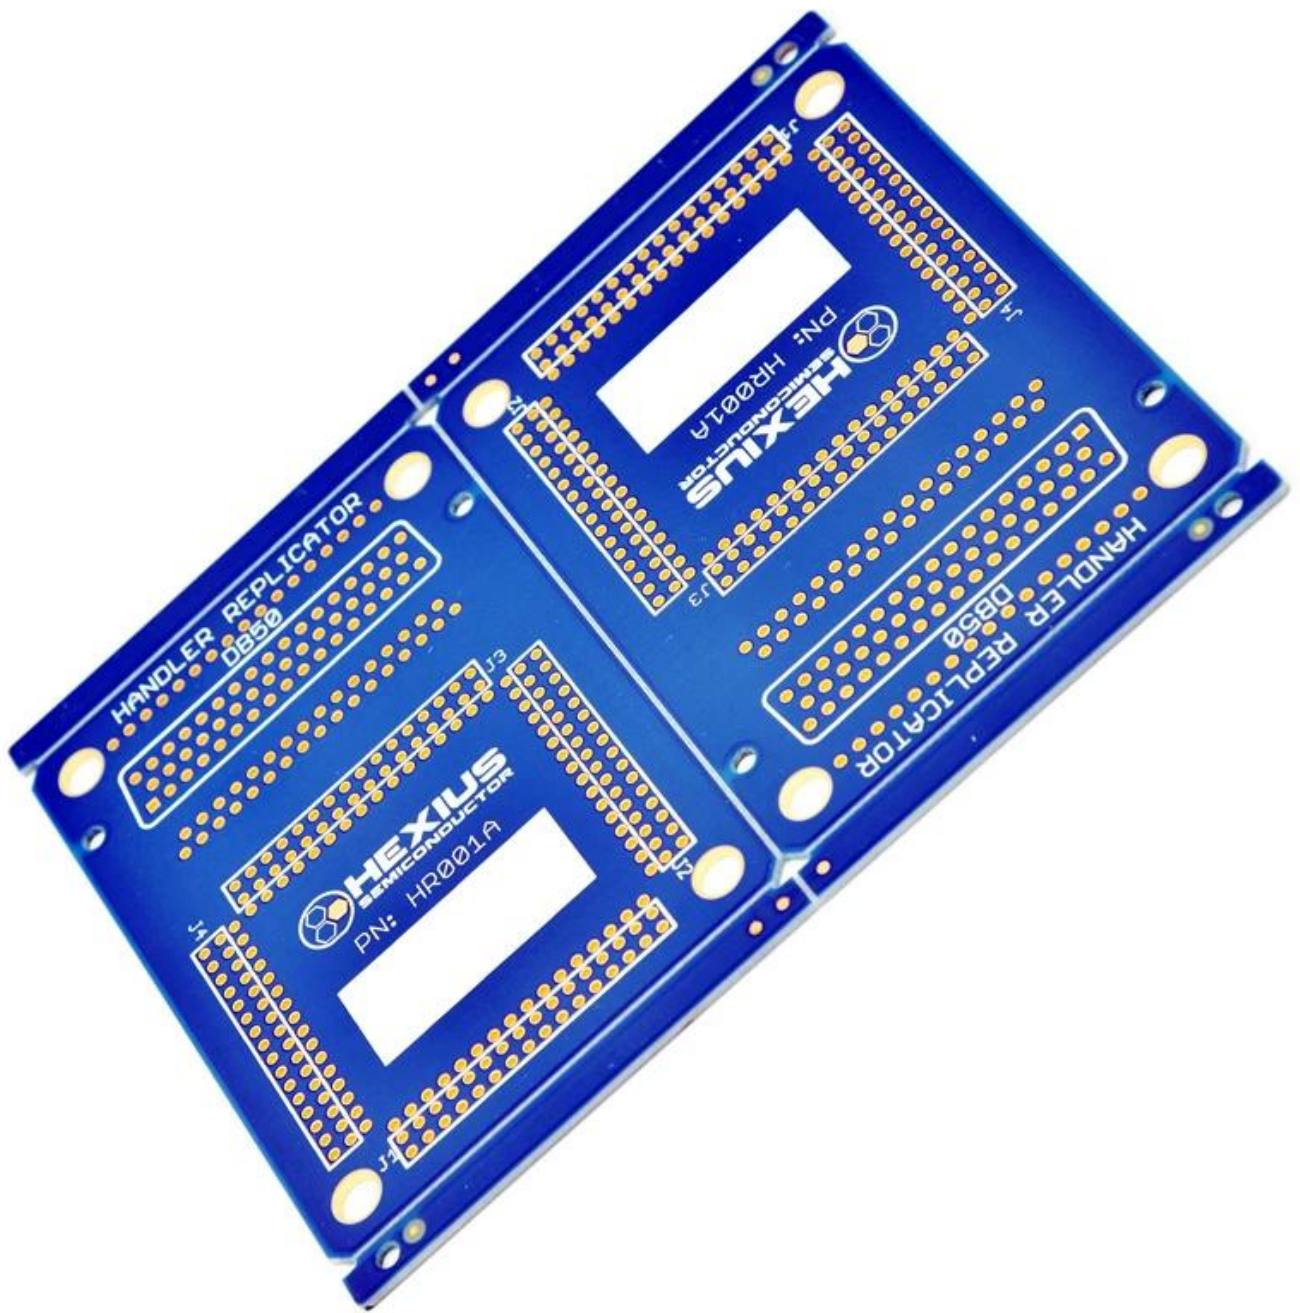

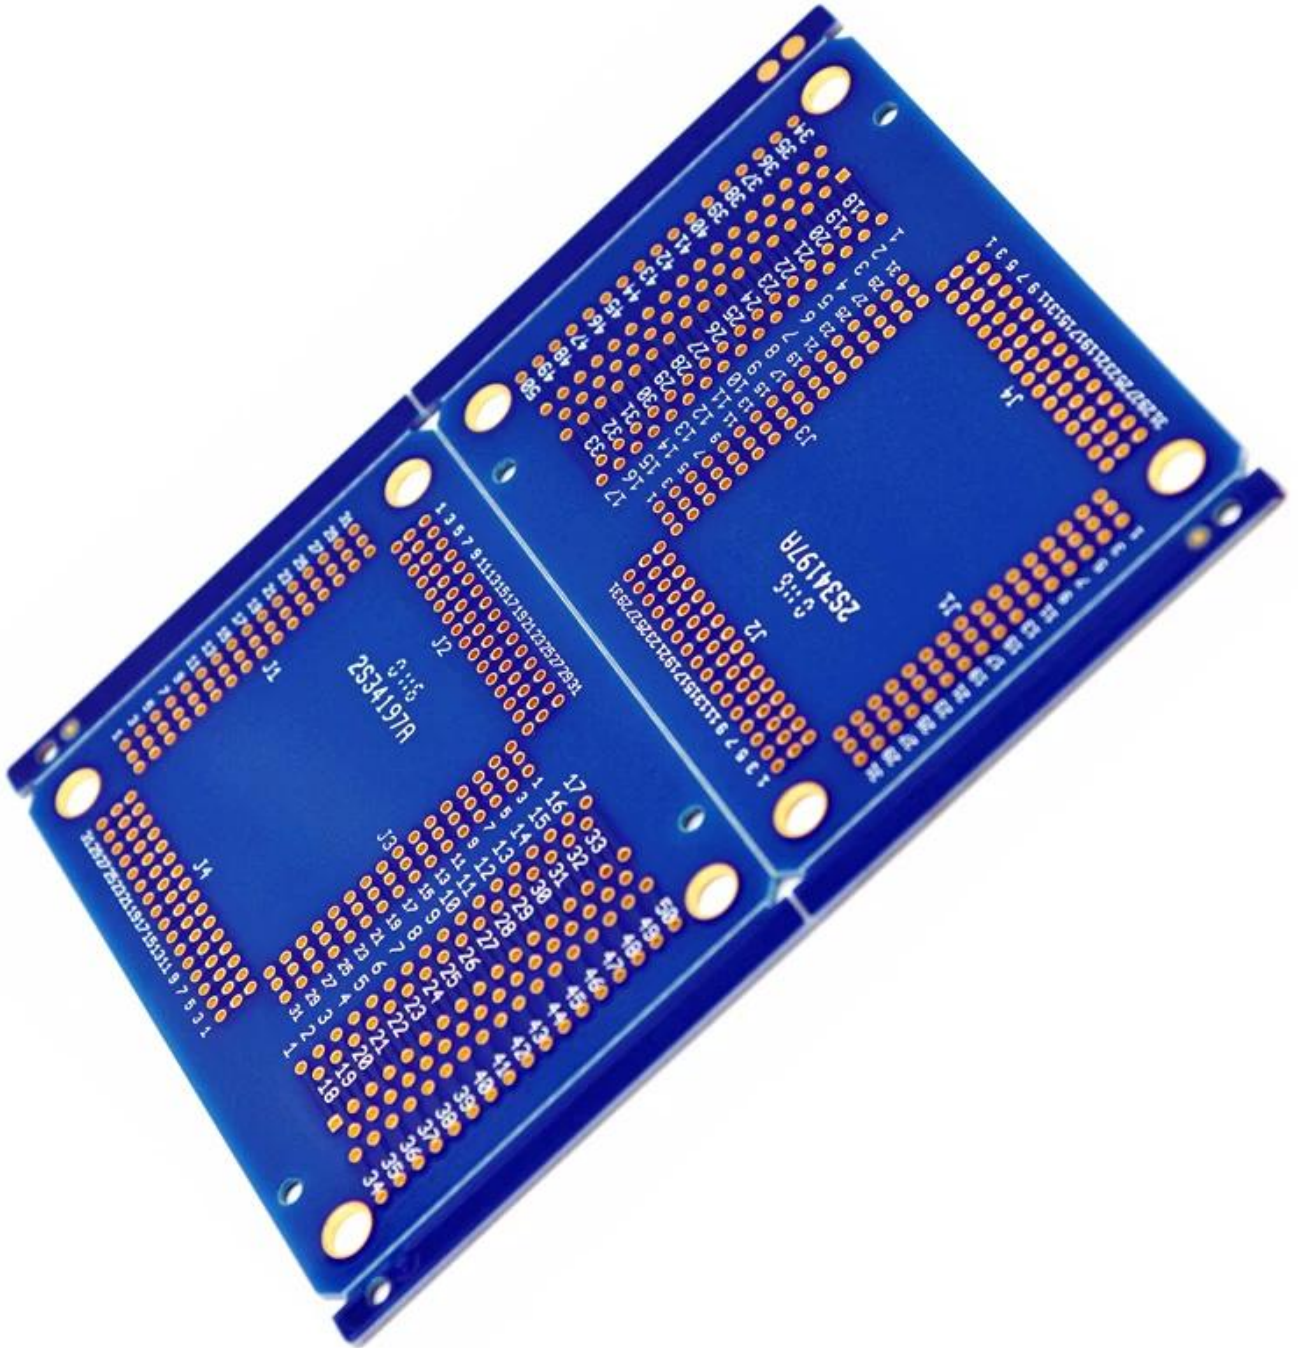

□□□ :
[□□□□□ pcb.□□□, □□ □□ □□ □□](#)