


COPPER PLATE HOLES MINIMUM .025 AVG, .020 MIN.. HOLES MAY NOT BE PLUGGED

This PN required 10% impedance, 8mil laser drill, POFV, stacked via, laser blind via drill thru 6mil dielectric and plug and plating flat via

Pack with colorless transparent bubble film ,25 PCS/ bag, put desiccant in flank, put humidity indicator card on top side

Layer structure

Custom Info Lyr	Image	Foil	Name
COMP		0.5oz	Foil 1/2oz(RTF)
6+/-0.9mil			R-5670K 1080 RC64%
			R-5670K 1080 RC64%
L2		0.5oz	Foil 1/2oz(RTF)
3.9+/-0.7mil			R-5670K 3313 RC54%
L3		0.5oz	
L4		0.5oz	R-5775K 0.200mm H/H 42.5"49"(3313*2)(RTF)
		0.5oz	
			R-5670K 1080 RC64%
6.9+/-1.5mil			R-5670K 3313 RC54%
		0.5oz	R-5775K 0.100mm H/H 42.5"49"(3313*1)(RTF)
L5		0.5oz	
L6			R-5670K 3313 RC54%
			R-5670K 1080 RC64%
6.9+/-1.5mil		0.5oz	R-5775K 0.200mm H/H 42.5"49"(3313*2)(RTF)
L7		0.5oz	
L8			R-5670K 3313 RC54%
3.9+/-0.7mil			
L9		0.5oz	Foil 1/2oz(RTF)
			R-5670K 1080 RC64%
6+/-0.9mil			R-5670K 1080 RC64%
SOLD		0.5oz	Foil 1/2oz(RTF)

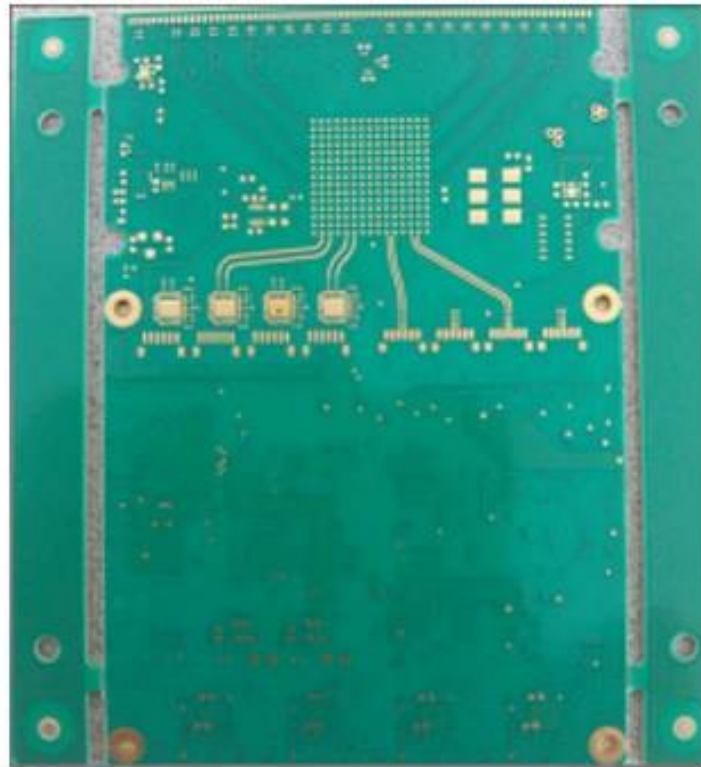



www.o-leading.com

[Printed Circuit Board PCB Manufacturing Company, Pcb prototype manufacturer china](http://www.o-leading.com)