

PCB

PCB Specifications

Material	FR-4, 2000	Thickness	0.5oz ~ 5oz
Min. Thickness	0.2mm	Min. Drill	0.2mm
Surface Treatment	OSP, HASL	Lead Thickness	0.1-5mm
LED, SMD, BGA, etc		PCB Type	Single PCB
ISO9001, UL, RoHS, SGS		Q / CTN	10PCS-100PCS
Weight	0.01kg ~ 5kg	MOQ	10pcs
PCB / pcba	Min. 0.2mm		
Color	.yellow	Price	\$ 0.1- \$ 10
Lead Time		Lead Time	0.01m3-10m3


PCB & PCB

16 PCB OEM pcb	
7-12	


PCB

16 PCB OEM pcb


	2014		2015 ~ 2016		2017 ~ 2018	
	mm	mm	mm	mm	mm	mm
32	42	38	44	42	48	
50/50	40/45	40/45	40/40	35/40	35/35	
0.15	0.10	0.15	0.10	0.15	0.10	
PTH	14 : 1	16 : 1	16 : 1	18 : 1	18 : 1	20 : 1
N + C + N	4 + C + 4	5 + C + 5	5 + C + 5	6 + C + 6	5 + C + 5	6 + C + 6
5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6	
Min. 50	40	40	30	40	30	
Min. 75	65	65	50	50	40	
	FR4, Megtron, Nelco, Rogers, Heavy Copper					
	HASL, ENIG, OSP, etc					

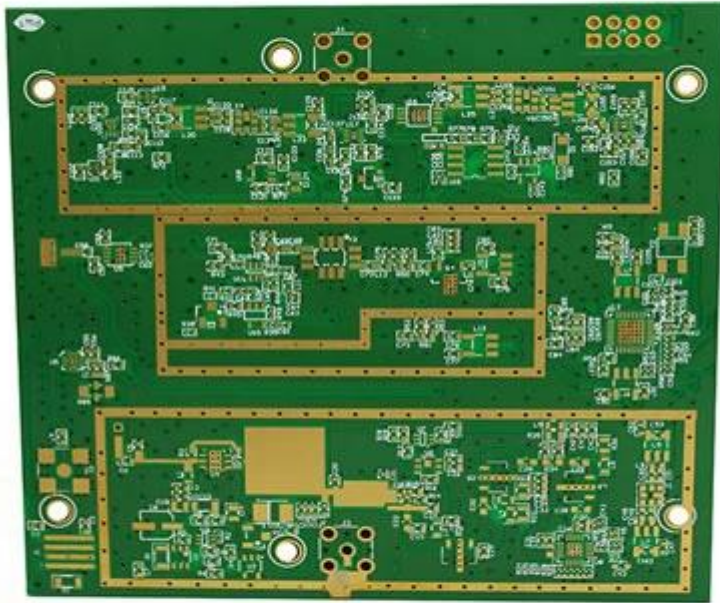

www.o-leading.com

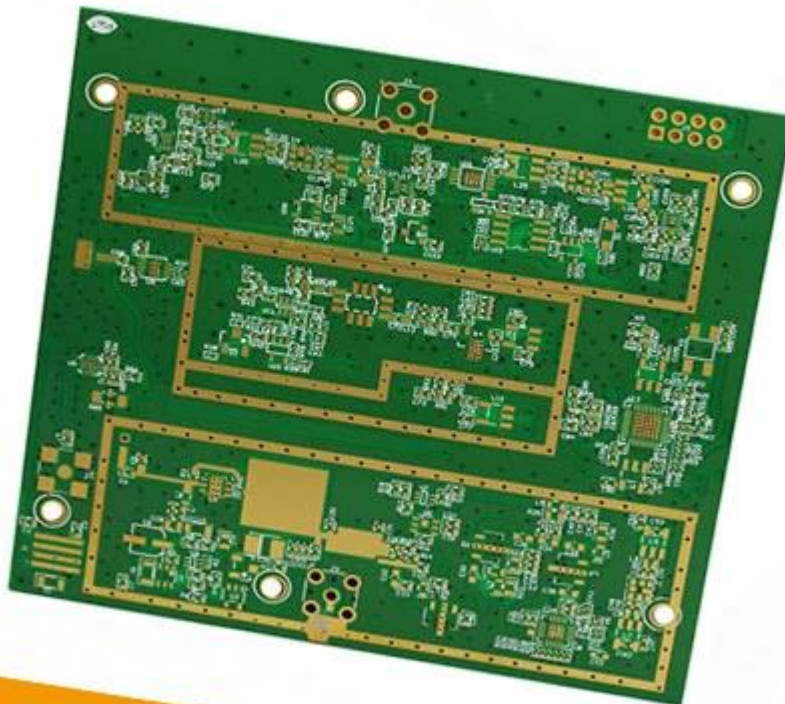

www.o-leading.com

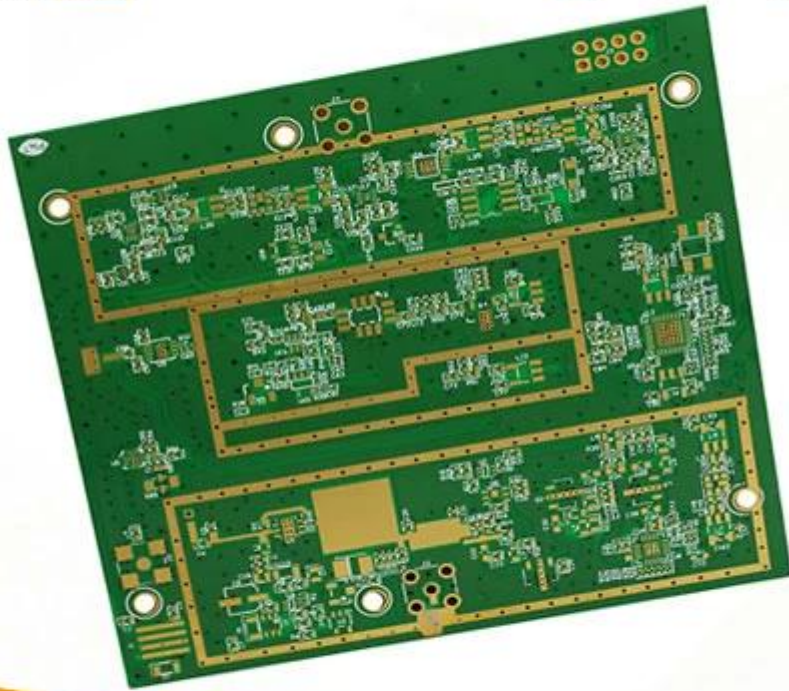

www.o-leading.com

