

O-leading

10 1000 1000 1000 PCB 10000000. 1000 1000 - 1000, 1000 1000, 1000 PCB, 1000 PCB 1000 MCPCB. 1000 1000 1000 1000 1000 1000 - 24 1000 S / S, 48-96 1000 1000 4-8 1000.


1000 1000 1000 .025 AVG, .020 MIN .. 1000 1000 1000 1000 1000

1000 1000 1000 1000, 25 PC / bag, 1000 1000 1000, 1000 1000 1000 1000

1000 1000 1000 1000 10000000 : [oem pcb 1000 1000 1000 1000](#)




PCB P / N	ENIG1000 1000 - 1000 PCB
1000 1000	4L (1000 2L + 1000 2L)
1000	FR-4 TG150
1000 1000000	0.80mm
1000 thk	1/1/1/1 1000
1000 1000 1000	0.30mm
1000 1000 (1000)	251
1000 w / s	5 / 6 1000
100000 1000. Y / N (Tol %)	1000
1000 1000	ENIG Au : 0.05-0.10UM
1000 1000 1000 1000	1000, 1000
1000 1000 1000	1000 X (mm) : 18.6; 1000 Y (mm) : 92.2
1000 1000	1000 X (mm) : 115, 1000 Y (mm) : 106.2, UPS 1000 : 5
1000 : 1000 1000 1000	1000
1000 / 1000	CNC

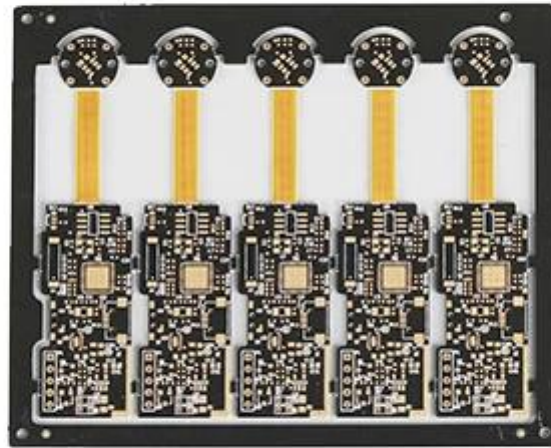

www.o-leading.com

00 - 0000 pcb 00

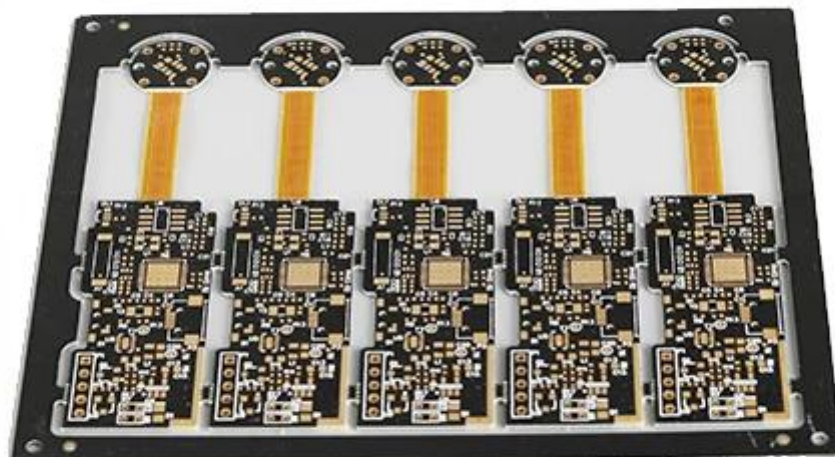

www.o-leading.com









2017/26 2016VZL430354 - Wiring, Printed - Component

ONLINE CERTIFICATIONS DIRECTORY

ZPMV2.E490354
Wiring, Printed - Component

For enhanced search functionality, please visit UL's [eCRP Family of Databases](#).
Click on a product designation for complete information.

[Page Bottom](#)

Wiring, Printed - Component

See General Information for Wiring, Printed - Components

O-LEADING SUPPLY CHAIN CO LIMITED
Fortune Building, Nanheng West Road
Room 1313
Huizhou, Guangdong 516211, CHINA

E490354

	Cond Width				Max				Max			
	Min	Min	Cond		SS/	Area	Solder		Oper	Flame	Heat	
	Min	Edge	Thk	DS/	Diam	Limits	Temp				UL796	
Type	mm(In)	mm(In)	mic(mil)	DSO	mm(In)	C	sec	C	Class	DSR	I	
Huileyer (mass laminate) printed wiring boards.												
O-LEADING-401												
	0.2 (0.004)	0.3 (0.012)	34 (1.34)	D6	12.7 (0.5)	260	10	230	V-0	-	-	
O-LEADING-407												
	0.08 (0.003)	0.2 (0.008)	17 (0.67)	D5	9.7 (0.4)	260	10	170	V-0	AB	-	
Huileyer printed wiring boards.												
O-LEADING-408												
	0.125 (0.005)	0.125 (0.005)	12 (0.47)	D6	50.8 (2.0)	260	20	130	V-0	AB	-	
Single layer printed wiring boards.												
O-LEADING-002												
	0.76 (0.015)	1.14 (0.045)	34 (1.34)	D5	19.1 (0.8)	260	10	105	V-0	AB	-	
O-LEADING-003												
	0.38 (0.015)	1.14 (0.045)	34 (1.34)	D5	19.1 (0.8)	260	10	130	V-0	AB	-	
O-LEADING-033												
	0.15 (0.006)	0.3 (0.012)	34 (1.34)	D5	25.4 (1.0)	260	10	120	V-0	AB	-	
O-LEADING-205												
	0.2 (0.004)	0.3 (0.012)	34 (1.34)	D6	69.8 (2.7)	260	10	130	V-0	AB	-	
O-LEADING-206												
	0.15 (0.006)	0.33 (0.013)	17 (0.67)	D5	69.8 (2.7)	260	10	130	V-0	AB	-	

* - CTI marking is optional and may be marked on the printed wiring board.

Making: Company name or file number and type designation. May be followed by a suffix to denote factory identification or burning test designation.
Last updated on 2017-01-27

Questions? Print this page Terms of Use Page Top

https://www.ul.com/certification/2016VZL430354-Wiring,Printed-Component



Test Report

No. CANEC1805164701

Date: 03 Apr 2018

Page 2 of 8

Test Results:

Test Part Description:

Specimen No. **SGS Sample ID** **Description**
SN1 CAN18-051647.001 Green "PCB"

Remarks:

- (1) 1 mg/kg = 1 ppm = 0.0001%
- (2) MDL = Method Detection Limit
- (3) ND = Not Detected (< MDL)
- (4) "-" = Not Regulated

RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU

Test Method: With reference to IEC 62321-4:2013+A1:2017, IEC 62321-5:2013, IEC 62321-7-2:2017, IEC 62321-6:2015 and IEC 62321-8:2017, analyzed by ICP-OES, UV-Vis and GC-MS.

Test Item(s)	Limit	Unit	MDL	Det
Cadmium (Cd)	100	mg/kg	2	ND
Lead (Pb)	1,000	mg/kg	2	9
Mercury (Hg)	1,000	mg/kg	2	ND
Hexavalent Chromium (CrVI)	1,000	mg/kg	8	ND
Sum of PBBs	1,000	mg/kg	-	ND
Monobromobiphenyl	-	mg/kg	5	ND
Dibromobiphenyl	-	mg/kg	5	ND
Trisbromobiphenyl	-	mg/kg	5	ND
Tetrabromobiphenyl	-	mg/kg	5	ND
Pentabromobiphenyl	-	mg/kg	5	ND
Hexabromobiphenyl	-	mg/kg	5	ND
Heptabromobiphenyl	-	mg/kg	5	ND
Octabromobiphenyl	-	mg/kg	5	ND
Nonabromobiphenyl	-	mg/kg	5	ND
Decabromobiphenyl	-	mg/kg	5	ND
Sum of PBDEs	1,000	mg/kg	-	ND
Monobromodiphenyl ether	-	mg/kg	5	ND
Dibromodiphenyl ether	-	mg/kg	5	ND
Trisbromodiphenyl ether	-	mg/kg	5	ND
Tetrabromodiphenyl ether	-	mg/kg	5	ND
Pentabromodiphenyl ether	-	mg/kg	5	ND



SGS is pleased to announce the launch of its new SGS Certification Services. SGS Certification Services are the only ones in the world that provide a full range of certification services for the automotive, aerospace, medical, food, and other industries. SGS Certification Services are the only ones in the world that provide a full range of certification services for the automotive, aerospace, medical, food, and other industries. SGS Certification Services are the only ones in the world that provide a full range of certification services for the automotive, aerospace, medical, food, and other industries.

□□ & □□

□□ □□ □□	16 □ □□ OEM pcb □□ □□ □□
□□ □□ □□	7-12 □



□□□□ □□

1. O-Leading□ □□□ □□□□□□?

□□□ □□□ □□□ □□ □□□□□.

1.□ □□□□□ ISO 9001 : 2008 □□□ □□ □□□ □□□□□.

2. □□ □□ □□□□□ □□□□□□ □□□□ □□

3.State-of-art □□□ □□ □ □□. □ : □□□ □□□, X □ □□, AOI (□□ □□ □□□) □ ICT (□□ □ □□□).

4. □□ □□ □□ □□□□□ □□ □ □□ □□ □□ □

5. □□□□ □□ □□ □ □□

2. O-Leading□ □□ □□□□ □□□ □□□□□?

□□ 10 □ □□ □□ □□□ (□ : □□, □□ □□)□ □□□ □ □, □ □ □□ □ □ □□□□□□. □□ □□ □□□□ □□ □□ 31 %□ □□□ □□□. □□ □□□□ □□ □ □□□□□. □□□□ O-Leading□ □□□ □□□□□□ □□□□□□. □□ □□ □□, □□□ □□ □ □□□ □□□ □□ □□□ □□□ □□ □□□□. □□□ □□□ □□ □□ □□□ □□ □□□□ □□ □□□□ □□□□.

□□□ □□□□ □□ □□□ □□□□. □□□ □□□□□ □□□ □□ □ □ □□□ □□□□□ □□ □□□ □ □□□□.

3. O-Leading □□□□□ □□ □□□ □□□ □ □ □□□□?

□□□□ FR4, □ TG □ □□□ □□ □□, Rogers, Arlon, Telfon, □□□□ / □□ □□ □□, PI □

4. PCB □□□ □□□ □□□□ □□□□□?

Gerber 274-X 檔案 檔案 檔案 檔案 檔案. 檔案 Cam350, CAD, Protel 99se, PADS, DXP 檔案 Eagle 檔案 檔案 檔案 檔案.

5. 檔案 PCB 檔案 檔案 檔案 檔案?

檔案 檔案 → 檔案 檔案 檔案 → 檔案 檔案 → 檔案 AOI → 檔案 檔案 → 檔案 → 檔案 → 檔案 → PTH → 檔案 → 檔案 檔案 檔案 → 檔案 檔案 → 檔案 檔案 → 檔案 AOI
→ 檔案 檔案 → 檔案 檔案 → 檔案 檔案 → 檔案 → E / T → 檔案 檔案.