

Productomschrijving

8 " gezichtsherkenning en temperatuurmeetkiosk

Model: KMT-0080U-3CAW

8 " gezichtsherkenning en temperatuurmeetkiosk Regelmatige info	
Werkende vochtigheid	0 - 90% relatieve vochtigheid, geen condensatie
Zout spray	Level Rp6 of hoger
Antistatische eigenschap	Contact $\pm$ 6KV, lucht $\pm$ 8KV
Kracht	DC12V / 2A, 20W (MAX)
Kolom diafragma	36mm
Uitrustingsgrootte	252 (L) * 136 (W) * 26 (T) mm
Scher姆 grootte	8 inch IPS HD-scher姆
Gewicht	1,7 kg
Wijzen van verpakking	Verpakt in drie dozen
Plaats van herkomst	China

Gedetailleerde afbeeldingen:

[Koorts alarm temperatuur zonder aanraking](#)

8" Facial Recognition and Temperature Measurement Kiosk



IP 65 waterproof
& dustproof




Infrared temperature
measurement



Alarming
system



Linux
Operating system



Accurate face
recognition



Large-capacity
face database

Contactless Infrared temperature detection



Temperature tolerance: $\pm 0.3^{\circ}\text{C}$

Temperature measurement range: $16^{\circ}\text{C} - 40^{\circ}\text{C}$

Detection distance: $\leq 30\text{cm}$

Rapid face Recognition: less than 1s

8-inch IPS full-view high-definition display, no image smearing, no delay.

Automatic gain, automatic white balance, make the true color of the image naturally restore.

Built-in black level sensor for video surveillance, low-light recognition is more accurate.




1s

**large storage capacity to meet places
with large traffic.**

24,000 face database

Support 24000+ face comparison data and 160,000 recognition records.



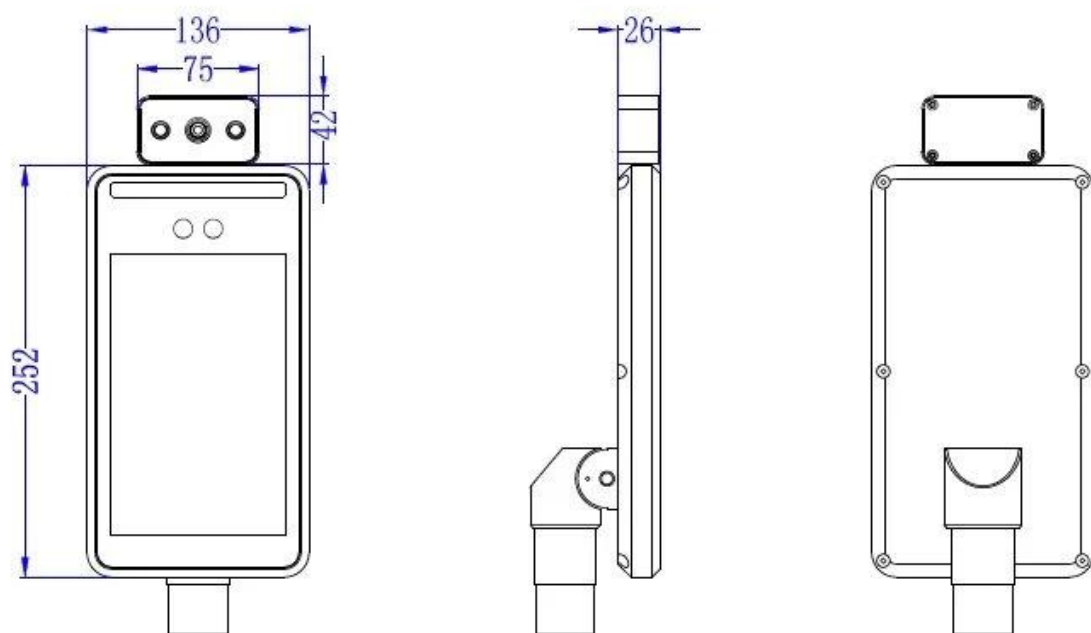

Alarm system for temperature measurement and entry management



Normal temperature: pass

abnormal temperature: can't pass



- Stranger
- ☒ Temperature measurement
- ☒ No entry



Flexible installation

Desktop



turnstile



wall mounted



Tripod



Pillar



Application

Bus, supermarket, school, government, hospital, factory




customized multiple interfaces



Gedetailleerde afbeeldingen





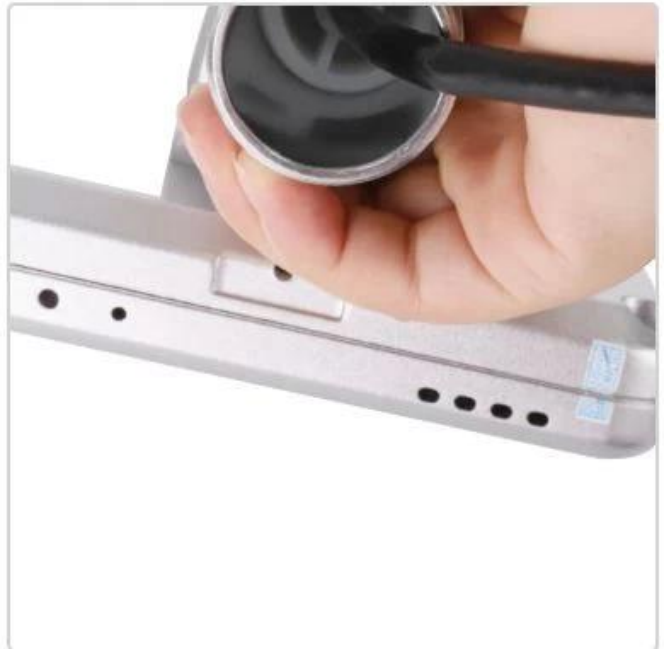











Model	KMT-0080U-3CAW
Hardware	
Processor	Dual Core Processor+ 1G memory + 16G flash
Operating system	Linux Operating system
Storage	Support TF card storage
Viewing angle	Vertical viewing angle: 30°; Horizontal viewing angle: 30°
Sensor	1/2.8" Progressive Scan CMOS(IMX307)
Lens	6mm
Communication	Support 4G \ WIFI \ bluetooth ; can be customized
Speaker	voice playback content can be customized
Temperature measurement performance	Please find the notes on last page
Measurement range	16℃ - 40℃ (Indoor without wind)
Temperature measurement	European original lens
Sensors type	Medical grade European imported sensors
Measurement accuracy	± 0.3℃
Temperature resolution	0.1℃
Temperature detection distance	≤30cm
Measurement response time	300ms
Performance	
Recognition	1.2~2.2 meters, angle adjustable
Recognition distance	0.3~1.5 meters, depends on lens
Recognition time	<0.5s
Storage capacity	160,000 capture records
Face capacity	24000pcs
Screen brightness	≥400 cd/m2
Interface	
Switching output	1 way switch output, other GPIO port can be customized
Network interface	1 RJ45 10M / 100M adaptive Ethernet port, Gigabit Ethernet port can be customized
Wiegand interface	1 Wiegand interface input/output
Communication interface	1 RS485 interface
USB interface	1 USB interface
Camera	
Camera	Dual cameras, visible and near infrared, support live detection
Effective pixels	2MP, 1920*1080
Min Illumination	Color 0.01Lux @F1.2(ICR);B/W 0.001Lux @F1.2 (ICR)
SNR	≥50db(AGC OFF)
WDR	120db, ISP algorithm face partial exposure
Function	
Web side configuration	support
remote upgrade	support
LAN/ WAN	support
Regular	
Working humidity	0~90% relative humidity, no condensation
Salt spray	level Rp6 or above
Antistatic	contact ±6KV, air ±8KV
Power	DC12V/2A , 20W(MAX)
Column aperture	36mm
Equipment size	252(L) * 136 (W) * 26 (T) mm
Screen size	8 inches IPS HD screen
Weight	1.7 kg

Verpakking en verzending

Verpakking en levering

Verkoopeenheden				Enkel voorwerp
Enkele pakketgrootte				25.3X14.5X14.5 cm
Enkel brutogewicht				1.500 kg
Pakkettype				
vak voor weergave				430 * 170 * 115 mm, gewicht: 2,1 kg.
doos voor weergave				500 * 195 * 425 mm, 3 stuks per doos, GW: 8,8 kg.
Beugel kartonnen doos				305 * 51 * 290 mm, GW: 0,3 kg.
Kartongrootte voor beugel				327 * 340 * 317 mm, 6 stuks per doos, GW: 18 kg.
0,6 m standaard box maat				630 * 132 * 124 mm, GW: 0,3 kg.
0,6 m standaard doosformaat				650 * 280 * 260 mm, 4 stuks per doos, GW: 15 kg.
1,1 m standaard formaat				1130 * 132 * 124 mm, GW: 0,5 kg.
1,1 m standaard doosformaat				650 * 280 * 260 mm, 4 stuks per doos, GW: 19,8 kg.
Doorlooptijd				
Aantal (stuks)	1-100	101-500	501-1000	> 1000
Est. Tijd (dagen)	3	5	7	Moet worden onderhandeld

FAQ

Q: Wat kan ik voor de prijs krijgen?

A: We citeren meestal binnen 24 uur nadat we uw aanvraag hebben ontvangen. Als u zeer dringend bent om de prijs te krijgen, vertel het ons dan in uw e-mail zodat we uw aanvraag als prioriteit beschouwen.

Vraag: Wat is uw handelsleveringstermijn?

A: Wij accepteren EXW, FOB Shenzhen of CIF-bestemmingspoort. U kunt degene kiezen die de ismeest handig of kostenbesparend voor u.

Vraag: Hoe zit het met de doorlooptijd voor de massaproductie?

A: Eerlijk gezegd hangt het af van de bestelhoeveelheid en het seizoen waarin u de bestelling plaatst. Sample order is binnen 2 dagen. OEM / OEM-bestelling heeft extra tijd nodig.