

**Product Description:
brief information**

Place of origin	Guangdong China (Mainland)	Brand name	O-Leading
Basic Material	EM-370(5) Mid-TG	Copper thickness	1oz
Minimum Hole Size	0.1mm	Minimum Line width	0.2mm
Surface treatment	Immersion gold, OSP	Plate thickness	0.1-5mm
Applicable to	Lead, mobile phone, air Air conditioners, washing machines	character	Industrial controller
Certificates	ISO9001, UL, RoHS, SGS	Q / CTN	10pcs-100pcs
the weight	0.01kg-5kg	MOQ	10 pieces
Model number	Assembling the power bank pcb pcba manufacturer	Minimum Line spacing	0.2mm
Colour	black	price	\$ 0.1- \$ 10
Type design	Customer requirement	the size	0.01m3-10m3

Packing & Delivery


Packaging Details	16-year-old professional OEM client Board Manufacturer
Delivery detail	7-12days.

Packing & Delivery


Packaging Details: 16-year-old professional OEM client Board Manufacturer

Delivery detail: 7-12days.


paragraph	2017		2018 ~ 2020		2021 ~ 2023	
	Amount	Sample	Amount	Sample	Amount	Sample
Number of layers	32	42	38	44	42	48
Min. Line / Spacing (µm)	50/50	40/45	40/45	40/40	35/40	35/35
Min. Drilling hole Diameter (mm)	0,15	0.10	0,15	0.10	0,15	0.10
Aspect Ratio PTH	14: 1	16: 1	16: 1	18: 1	18: 1	20: 1
N + C + N,	4 + C + 4	5 + C + 5	5 + C + 5	6 + C + 6	5 + C + 5	6 + C + 6
Any layer Relationship	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6
Filling of plates through	YES	-	YES	-	YES	-
Minimum Core Thickness (Excluding copper) (µm)	50	40	40	thirty	40	thirty
Minimum Laser Drill Diameter (µm)	75	65	65	50	50	40
Via at the Funeral Hole / styling through	YES	-	YES	-	YES	-
material	FR4, Megtron, Nelco, Rogers, Heavy Copper, etc.					
Built-in capacitor printed circuit board	YES	-	YES	-	YES	-
Surface process	Lead-free HASL, ENIG, OSP, silver with immersion, tin of immersion, Flash of gold, Golden finger coating, Selective solid gold coating, Flaking solder mask, carbon ink					

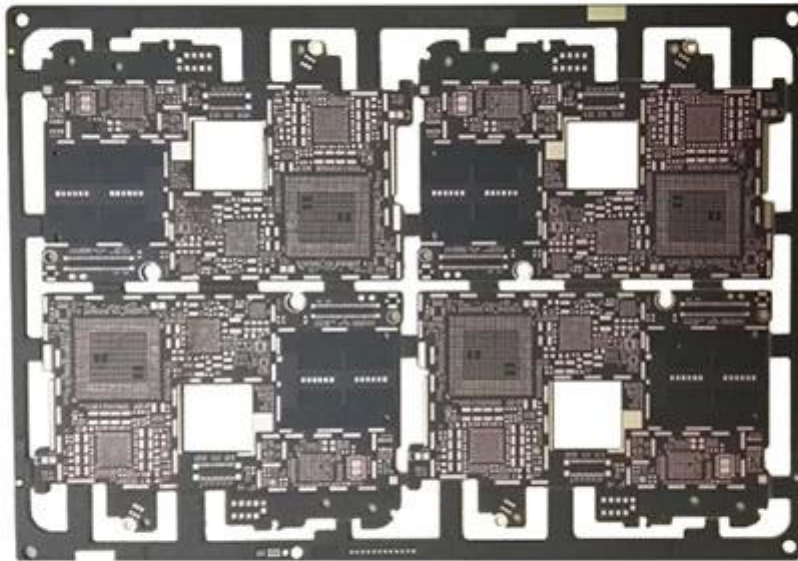

www.o-leading.com

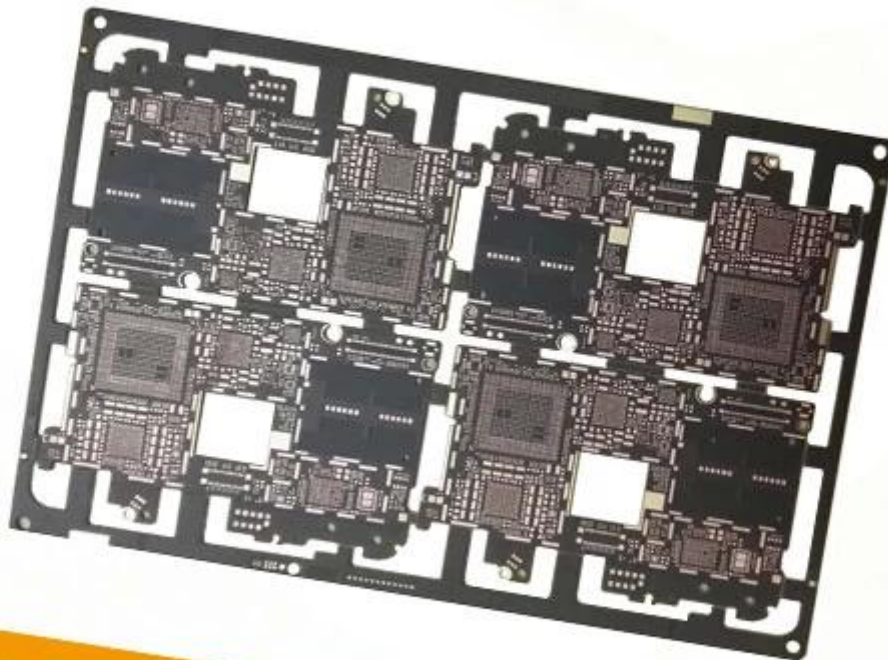

www.o-leading.com

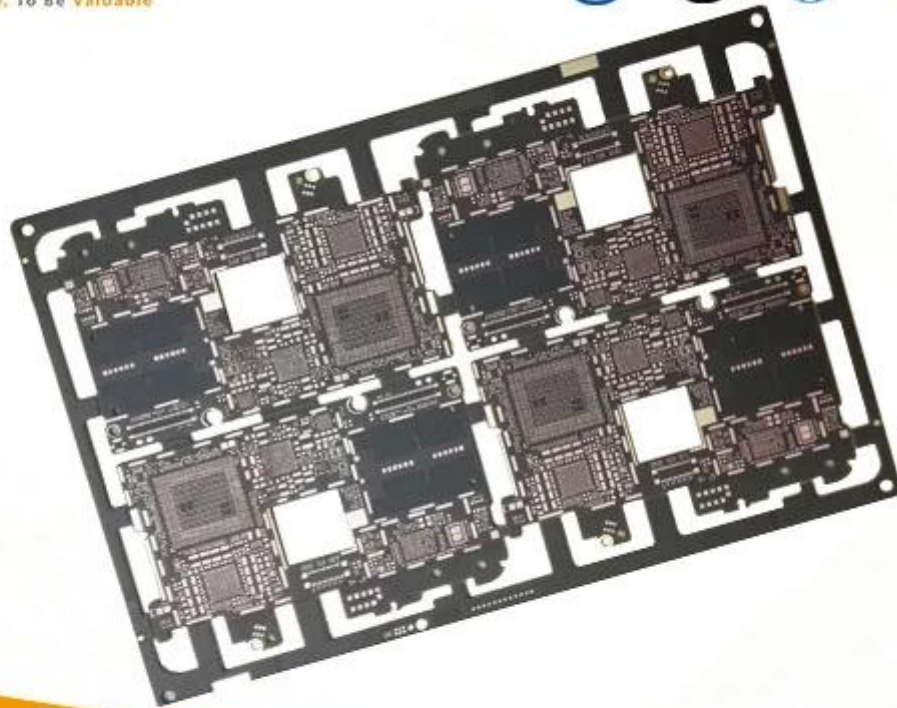

www.o-leading.com

[HDI pcb Printed Circuit Board, led pcb board manufacturer](#)