


COPPER PLATE HOLES MINIMUM .025 AVG, .020 MIN.. HOLES MAY NOT BE PLUGGED
Special requirement:ENIG, Impedance: Tol: +/-7%, Press fit hole


Pack with colorless transparent bubble film ,25 PCS/ bag, put desiccant in flank, put humidity indicator card on top side

Layer structure

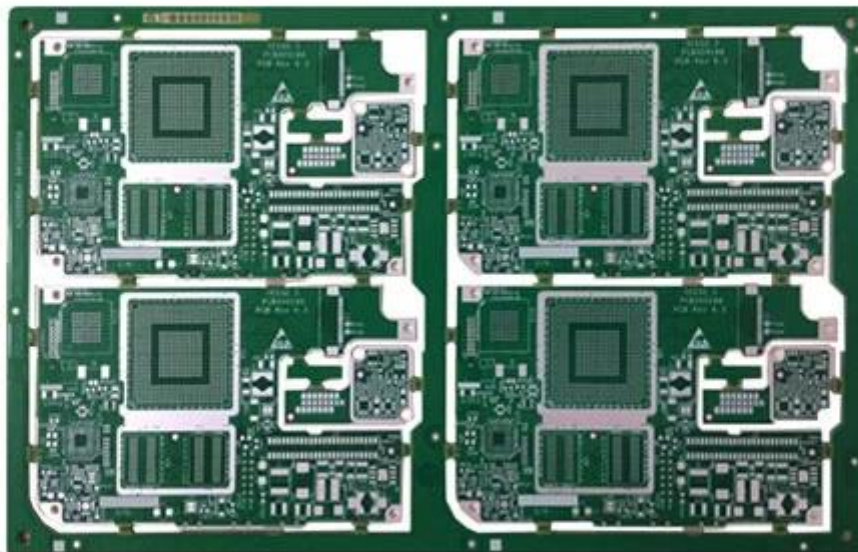

www.o-leading.com

O-LEADING
To Be **Reliable**, To Be **Valuable**

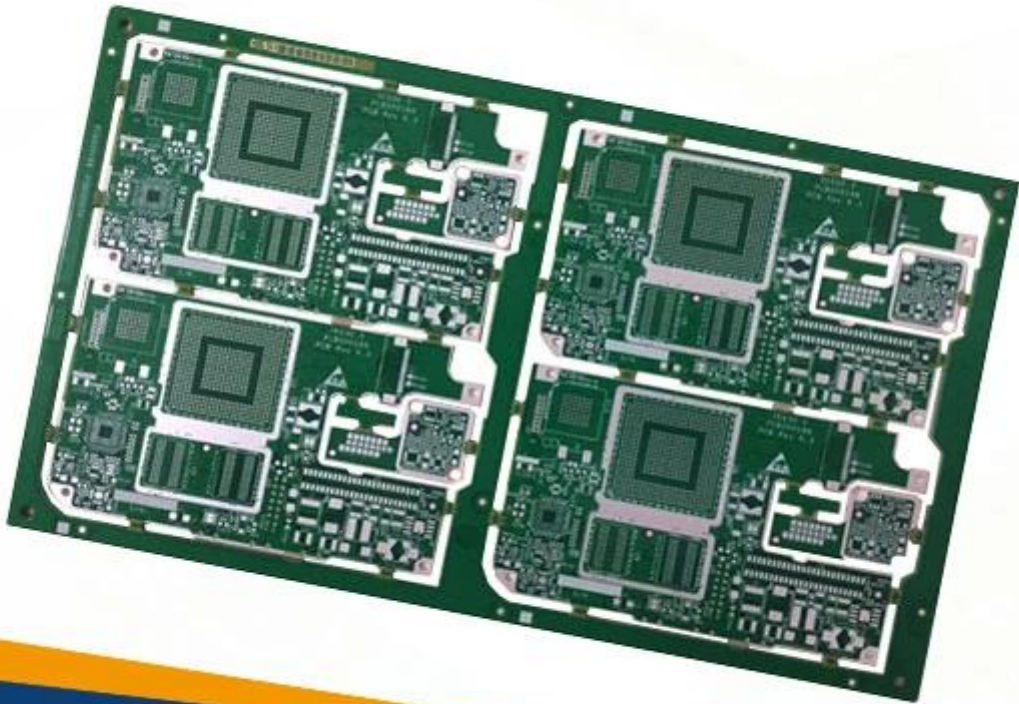

www.o-leading.com

O-LEADING
To Be **Reliable**, To Be **Valuable**



www.o-leading.com

[Printed circuit board company, PCB with impedance control, Small volume pcb manufacturer](#)