


COPPER PLATE HOLES MINIMUM .025 AVG, .020 MIN.. HOLES MAY NOT BE PLUGGED


This PN required 2/2mil fine line ; fine thin□Low Dk

Pack with colorless transparent bubble film ,25 PCS/ bag, put desiccant in flank, put humidity indicator card on top side

Layer structure

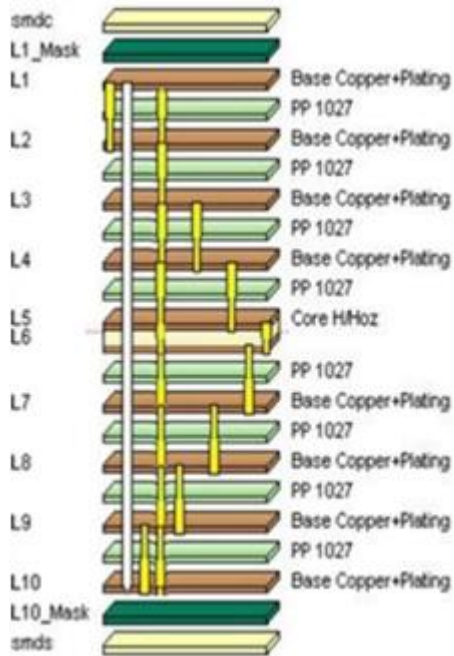


O-LEADING
To Be Reliable, To Be Valuable

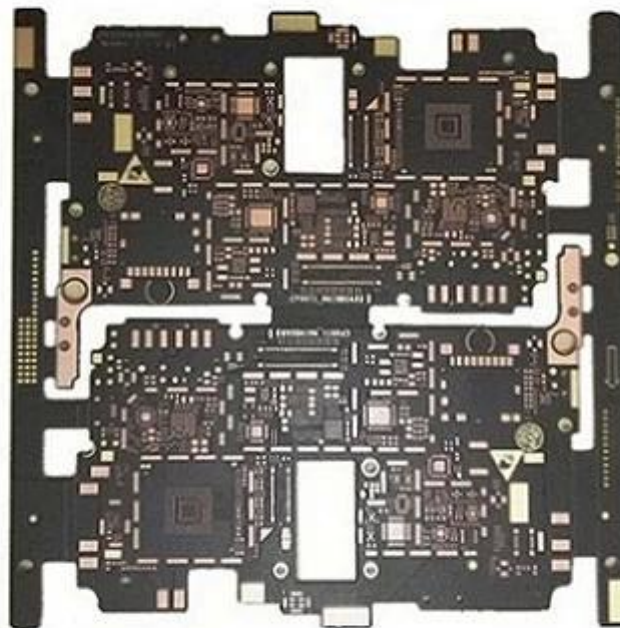

www.o-leading.com

O-LEADING
To Be *Reliable*, To Be *Valuable*

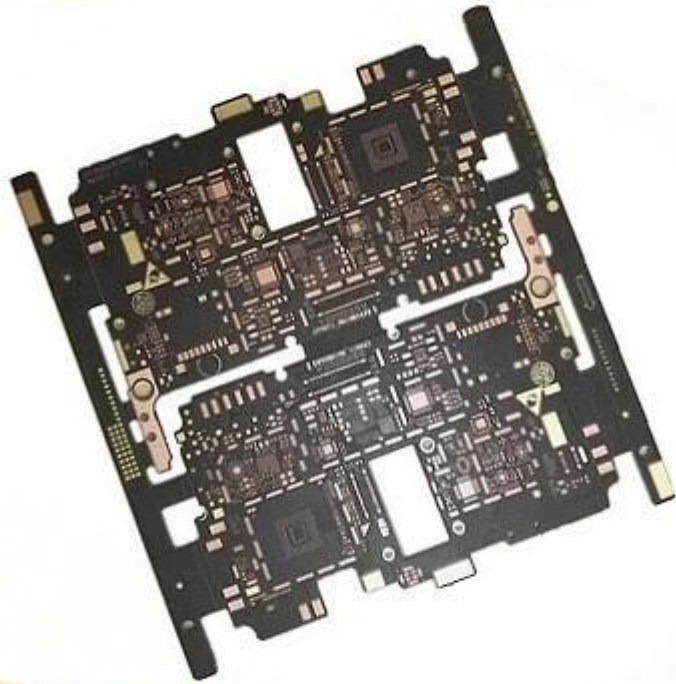

www.o-leading.com

O-LEADING
To Be *Reliable*, To Be *Valuable*



www.o-leading.com

[Printed circuit board supplier](#) , [HDI pcb Printed circuit board](#) , [Quick turn pcb Printed circuit board](#)