

# Willkommen bei o-führend

O-Lead ist einst bemüht, Ihr One-Stop-Lösungspartner in der EMS-Lieferkette zu sein, einschließlich PCB-Design, PCB-Fabrikation und PCB-Baugruppe (PCBA). Wir bieten einigen der fortschrittlichsten PCB-Technologie, einschließlich HDI-Leiterplatten, mehrschichtige Leiterplatten, steif-flexible PCBs Wir können von einem schnellen Turn-Prototyp zur mittleren & Massenproduktion unterstützen. [Doppelseitiger PCB-Hersteller China](#)

Im Allgemeinen sind unsere globalen Kunden sehr beeindruckt von unseren Diensten: Schnelle Reaktion, wettbewerbsfähiger Preise und Qualitätszusagen. Provovieren mehr wertvoller technischer Service und allgemeine Lösung ist der Weg, der nach vorne führt. [Leiterplatte in China](#)

Wenn Sie auf die Zukunft suchen, wird sich o-führend auf die Innovation und Entwicklung der Elektronikfertigungstechnologie wie immer konzentrieren und anhaltende Anstrengungen für den PCB- und PCBA-One-Stop-Service erstellen, um erstklassige Dienste und CRE anbieten zu können. mehr Wert für unsere Kunden.

Bitte klicken Sie auf diese, um weitere Informationen zu erhalten: [Leiterplattenfirma](#)

## Produktbeschreibung

### Schnelle Details


Herkunftsort	Guangdong China (Festland)	Markenname	O-führend
Basismaterial	FR-4, Aluminium	Kupferdicke.	0,5z-5oz.
Mindest. Lochgröße	0,2 mm	Mindest. Linienbreite	0,2 mm
Oberflächenveredelung.	Immersionsgold, OSP, Bleifrei HASL	Boarddicke.	0,1-5 mm
anwendbar auf	LED, Mobiltelefon, Klimaanlage, Waschmaschinen	Charakter	Industrielle Steuerung PCB.
Zertifikate	ISO9001, UL, ROHS, SGS	Q / ctn.	10pcs-100pcs.
Gewicht	0,01 kg -5kg.	Moq.	10pcs.
Modell-Nr	Power Bank PCB-Baugruppe PCBA-Hersteller	Preis	\$ 0,1- \$ 10
Farbe	blau, rot, grün, schwarz.	Mindest. Zeilenabstand	0,2 mm
Desique-Typ.	Kundenanforderung.	Größe	0,01 m-10m3.

### Produktbeschreibung

#### 16 Jahre professionelle OEM-Leiterplattenbrettherstellung

Artikel	2014.		2015 ~ 2016.		2017 ~ 2018.	
	Volumen	Stichprobe	Volumen	Stichprobe	Volumen	Stichprobe
Schichtzählung	32.	42.	38.	44.	42.	48.
Min Zeile / Raum (µm)	50/50.	40/45.	40/45.	40/40.	35/40.	35/35.
Mindestbohrloch Durchmesser (mm)	0,15.	0,10.	0,15.	0,10.	0,15.	0,10.

Seitenverhältnis von Pth	14: 1	16: 1	16: 1	18: 1.	18: 1.	20: 1
N + c + n	4 + c + 4	5 + c + 5	5 + c + 5	6 + c + 6	5 + c + 5	6 + c + 6
Jede Schichtverbindung	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6	5 + 2 + 5	6 + 2 + 6
Plattenfüllung via.	JA	-	JA	-	JA	-
Mindest. Kernstärke (Kupfer ausschließen) (µm)	50.	40.	40.	30.	40.	30.
Mindest. Laserbohrerdurchmesser (µm)	75.	65.	65.	50.	50.	40.
Via auf begraben Loch / gestapelt über	JA	-	JA	-	JA	-
Material	FR4, MEGTRON, Nelco, Rogers, schweres Kupfer usw.					
Eingebettete Kondensator PCB.	JA	-	JA	-	JA	-
Oberflächenprozess	Bleifreier Hasl, enig, osp, Immersion Silber, Tauchzinn, Blitzgold, Goldfingerplattierung, selektive harte Goldplattierung, Abziehbare Lötmaske, Carbon-Tinte					

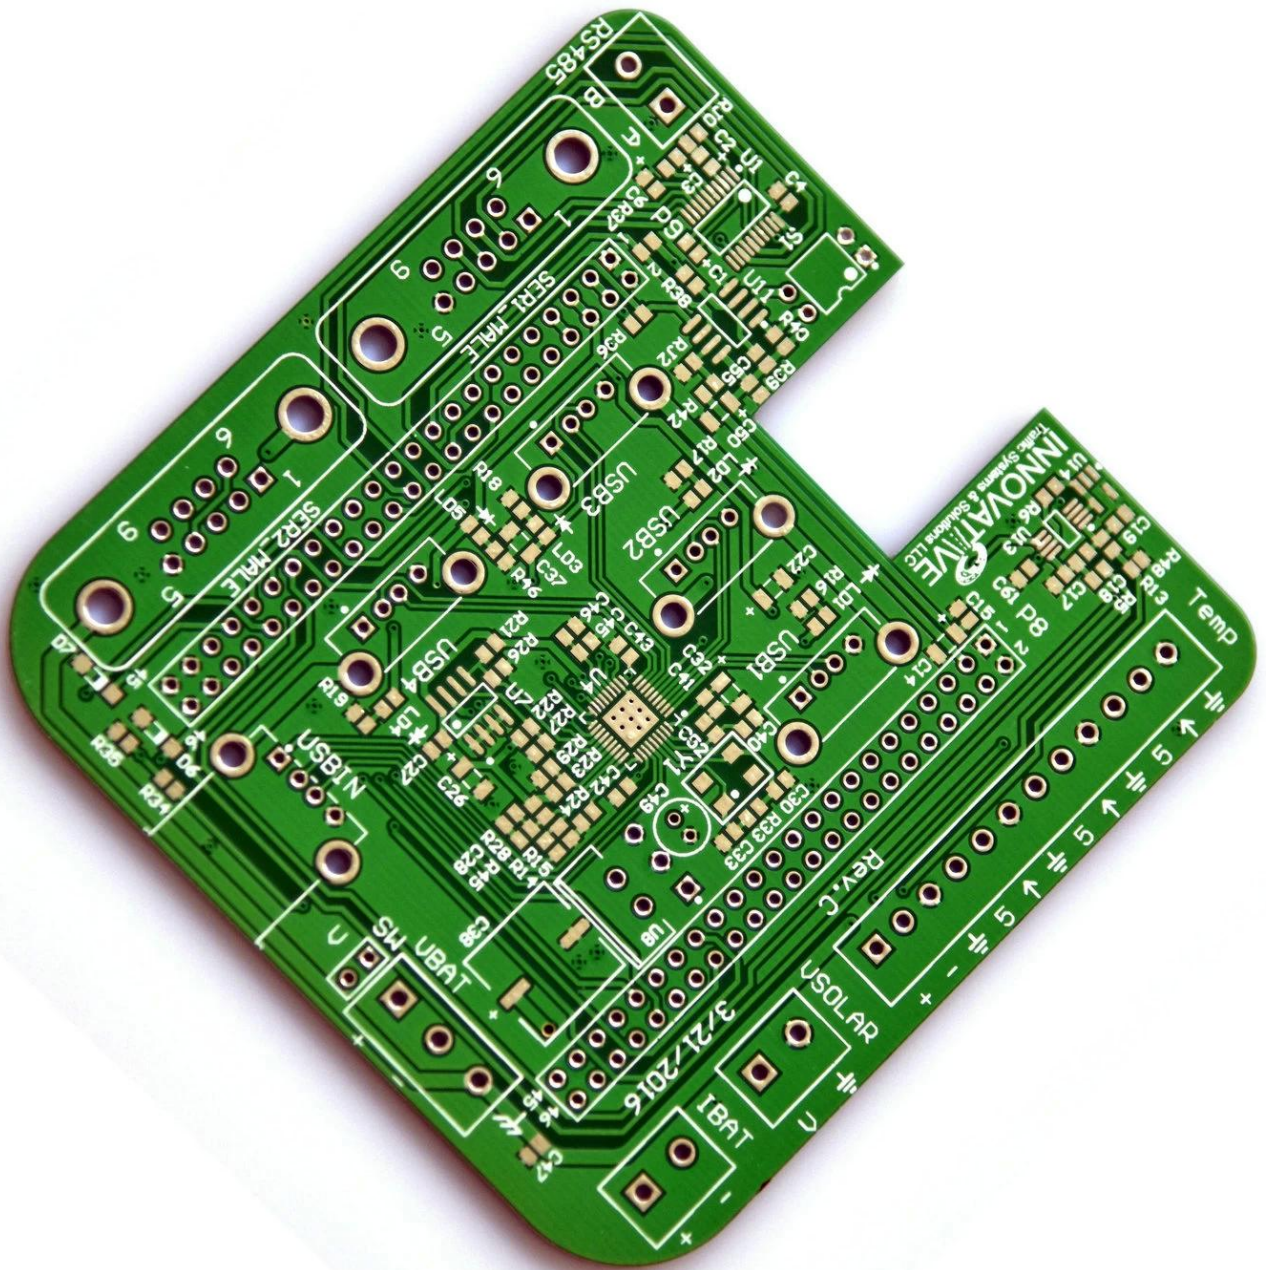

**INNOVATIVE**  
TECHNOLOGIES & SOLUTIONS  
SOLUTIONS, LLC

3/21/2016

USOLAR

IBAT

UBAT

SH

Temp

Rev. C

USB3

USB2

USB1

USB4

USB1N

SER1\_MALE

SER2\_MALE

RS485

RS485A

RS485B

RS485C

RS485D

RS485E

RS485F

RS485G

RS485H

RS485I

RS485J

RS485K

RS485L

RS485M

RS485N

RS485O

RS485P

RS485Q

RS485R

RS485S

RS485T

RS485U


RS485V

RS485W

RS485X

RS485Y

RS485Z

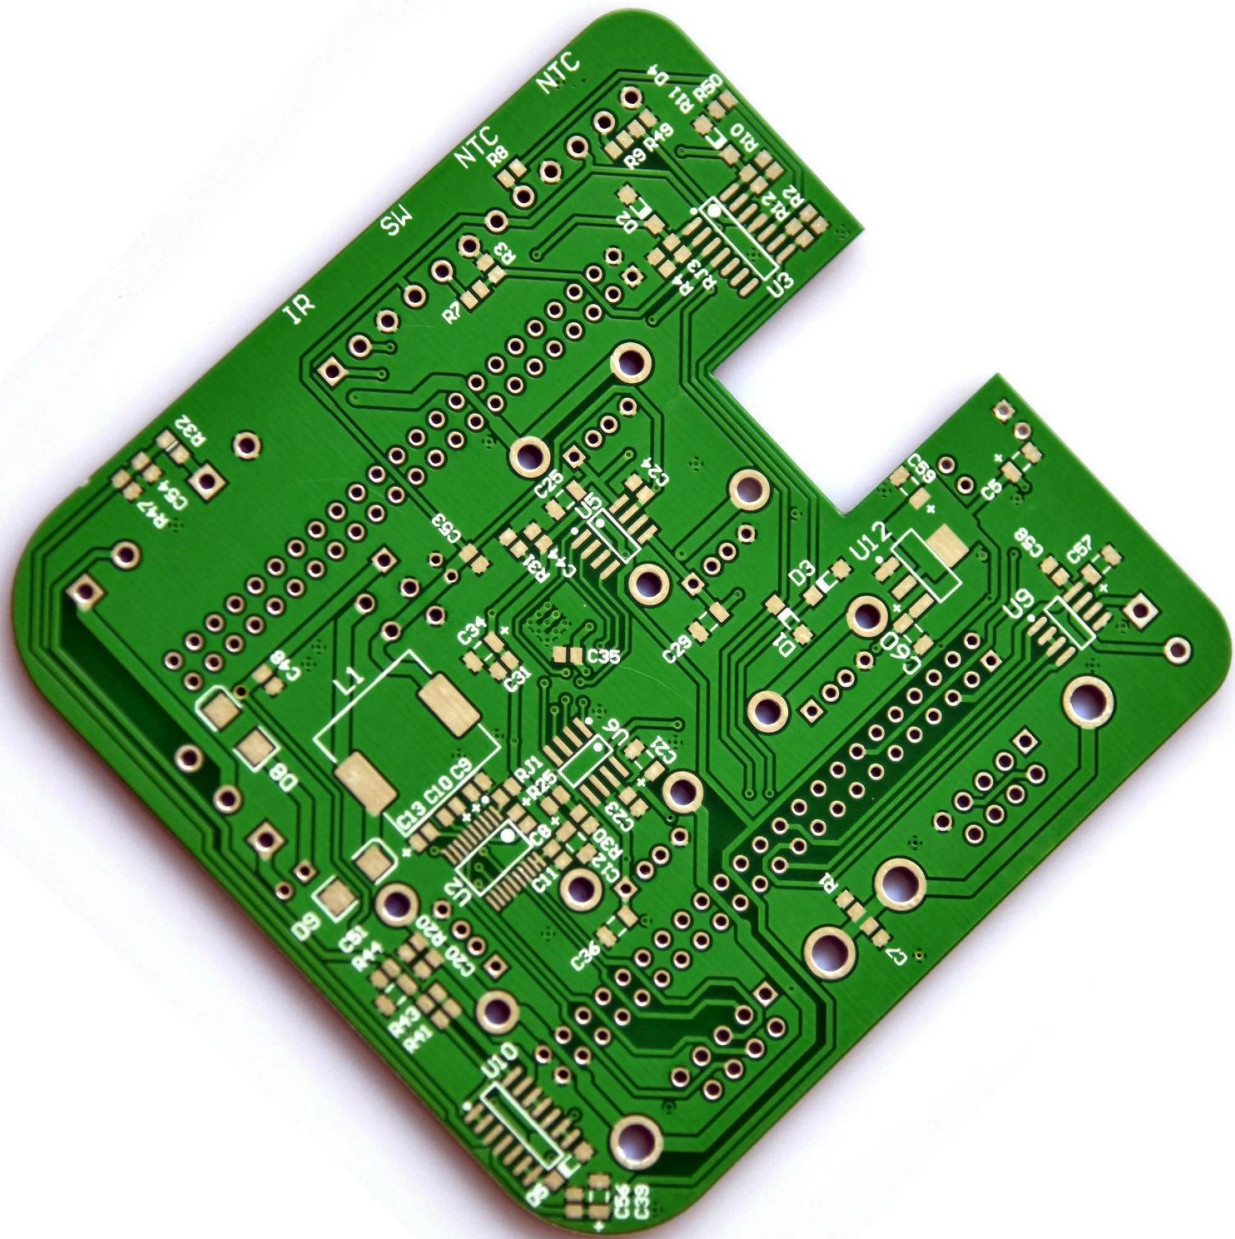

Unser Team



---

Factory PCB

---



Automatic vacuum press machine



Drilling Machine



Pattern Plating Machine



Scrubbing Machine



Developing Machine



Routing Machine



High-speed flying probe machine



E-test Machine

---

Factory SMT

---



# Zertifizierungen

CICC INSPECTION CERTIFICATION



**嘉泰认证**

**QUALITY MANAGEMENT SYSTEM CERTIFICATE**  
Certificate No: 18118Q10347R05

**We hereby certify that**  
**O-LEADING SUPPLY CHAIN(HK) CO.,LIMITED**  
Credit No: 61691591-000-07-18-7  
Registration Add: FLAT/RM 1205 12/F TAI SANG BANK BUILDING 130-132 DES VODEUS ROAD CENTRAL HK  
Business Add: 1213, Floor 13, Fortune Building, Danshui Town, Huiyang District, Huizhou, Guangdong, China

Has implemented and maintains a **Quality Management System** Which fulfills the requirements of the following standards  
GB/T19001-2016 idt ISO9001:2015

**Scope of certification**  
Sales of printed circuit boards

Initial issuance period: February 27, 2018  
Renewal date: April 22, 2019  
This certificate is valid during: April 22, 2019 – February 26, 2021  
This certificate is invalid without CICC qualified label in the following period

First supervision and audit	Second supervision and audit	Qualified mark
-----------------------------	------------------------------	----------------

The certification registration number does not include those production sites which fail to be covered by the relevant effective administrative procedures and qualification procedures stipulated by the state. The effectiveness of this certificate shall be restricted to those certification units of CICC the certificate shall be valid when used together with the qualified mark issued.

The initial issuance of this certification can be searched on the portal of CICC [www.cicc.com.cn](http://www.cicc.com.cn) by the site of inquiry [www.cicc.com.cn](http://www.cicc.com.cn).






CICC INSPECTION CERTIFICATION



**嘉泰认证**

**质量管理体系认证证书**  
证书号: 18118Q10347R05

**兹证明**  
**诚领供应链（香港）有限公司**  
统一社会信用代码: 61691591-000-07-18-7  
注册地址: 香港中環德輔道中 130-132 號大生銀行大廈 1205 室  
经营地址: 广东惠州惠阳淡水南亨西路财富大厦 13 楼 1313

建立的质量管理体系符合  
GB/T19001-2016 idt ISO9001:2015 质量标准适用条款的要求

**认证范围**  
印刷线路板的销售

初次获证日期: 2018年02月27日  
换证日期: 2019年04月22日  
证书有效期: 自2019年04月22日至2021年02月26日  
在下列期限内, 未经 CICC 黏贴合格标贴, 本证书无效

第一次监督	第二次监督	黏贴处
-------	-------	-----

本证书认证范围不包括未取得有效的国家规定的行政许可、资质许可的产品/服务范围; 本证书通过 CICC 定期监督审核保持, 与年度《保持认证通知书》共同方为有效; 本证书信息可在国家认监委网站: [www.cnca.gov.cn](http://www.cnca.gov.cn) 及 CICC 网站 [www.cicc.com.cn](http://www.cicc.com.cn) 查询。








Test Report

No. SZXEC1900530401 Date: 30 Mar 2019 Page 1 of 6

O-LEADING SUPPLY CHAIN (HK) CO., LIMITED

1313.FLOOR 13, FORTUNE BUILDING, DANSHUI TOWN, HUIYANG DISTRICT, HUIZHOU, GUANGDONG, CHINA

The following sample(s) was/were submitted and identified on behalf of the clients as : OSP

SGS Job No. : RP19-005089 - SZ
Date of Sample Received : 22 Mar 2019
Testing Period : 22 Mar 2019 - 30 Mar 2019
Test Requested : Selected test(s) as requested by client.
Test Method : Please refer to next page(s).
Test Results : Please refer to next page(s).

Conclusion : Based on the performed tests on submitted sample(s), the results of Lead, Mercury, Cadmium, Hexavalent chromium, Polybrominated biphenyls (PBBs), Polybrominated diphenyl ethers (PBDEs) and Phthalates such as Bis(2-ethylhexyl) phthalate (DEHP) , Butyl benzyl phthalate (BBP), Dibutyl phthalate (DBP) , and Diisobutyl phthalate (DIBP) comply with the limits as set by RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU.

Signed for and on behalf of
SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Tina
Tina Fan
Approved Signatory



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/terms-and-conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/terms-and-conditions/Electronic-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that unless he/she expressly agrees to the Company's liability at the time of its intended use, the limits of the Company's liability are restricted to the extent of the Company's liability under the transaction documents. This document cannot be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this report refer only to the samples tested.

Member of the SGS Group (SGS SA)



Test Report

No. SZXEC1900530401 Date: 30 Mar 2019 Page 2 of 6

Test Results :

Test Part Description :

Table with 3 columns: Specimen No., SGS Sample ID, Description. Row 1: SN1, SZX19-005304.001, Green"PCB"

Remarks :

- (1) 1 mg/kg = 1 ppm = 0.0001%
(2) MDL = Method Detection Limit
(3) ND = Not Detected (< MDL)
(4) "-" = Not Regulated

RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU

Test Method : With reference to IEC 62321-4:2013+A1:2017, IEC 62321-5:2013, IEC 62321-7-2:2017, IEC 62321-6:2015 and IEC 62321-8:2017, analyzed by ICP-OES, UV-Vis and GC-MS.

Table with 5 columns: Test Item(s), Limit, Unit, MDL, 0/1. Lists various heavy metals and brominated compounds with their respective limits and detection results.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/terms-and-conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/terms-and-conditions/Electronic-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that unless he/she expressly agrees to the Company's liability at the time of its intended use, the limits of the Company's liability are restricted to the extent of the Company's liability under the transaction documents. This document cannot be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this report refer only to the samples tested.

Member of the SGS Group (SGS SA)





## ZPMV2.E490354 - WIRING, PRINTED - COMPONENT

## Wiring, Printed - Component

See General Information for Wiring, Printed - Component

**O-LEADING SUPPLY CHAIN (HK) CO LTD**

E490354

ROOM 1205, 12/F  
TAI SANG BANK BLDG  
130-132 DES VOEUS ROAD  
CENTRAL, HONG KONG

Type	Cond Width			SS/ DS/ DSO	Max	Max			Meets UL796	C T	
	Min	Cond	SS/ DS/ DSO		Area	Solder	Oper	Flame			
	mm(in)	Edge			Thk	Diam	Limits				Temp
<b>Multilayer (mass laminate) printed wiring boards.</b>											
<b>O-LEADING-401</b>	0.1 (0.004)	0.3 (0.012)	34 (1.34)	DS	12.7 (0.5)	260	10	130	V-0	-	-
<b>O-LEADING-407</b>	0.08 (0.003)	0.2 (0.008)	17 (0.67)	DS	9.7 (0.4)	260	10	130	V-0	All	-
<b>Multilayer printed wiring boards.</b>											
<b>O-LEADING-408</b>	0.125 (0.005)	0.125 (0.005)	12 (0.47) Int:136	DS	50.8 (2.0)	280	20	130	V-0	All	*
<b>Single layer printed wiring boards.</b>											
<b>O-LEADING-002</b>	0.38 (0.015)	1.14 (0.045)	34 (1.34)	SS	19.1 (0.8)	260	10	105	V-0	All	-
<b>O-LEADING-003</b>	0.38 (0.015)	1.14 (0.045)	34 (1.34)	SS	19.1 (0.8)	260	10	130	V-0	▲	-
<b>O-LEADING-033</b>	0.15 (0.006)	0.3 (0.012)	34 (1.34)	SS	25.4 (1.0)	260	10	120	V-0	All	-
<b>O-LEADING-205</b>	0.1 (0.004)	0.3 (0.012)	34 (1.34)	DS	69.6 (2.7)	260	10	130	V-0	All	-
<b>O-LEADING-206</b>	0.15 (0.006)	0.33 (0.013)	17 (0.67)	DS	69.6 (2.7)	260	10	130	V-0	All	-
<b>O-LEADING-D01</b>	0.14 (0.006)	0.15 (0.006)	33 (1.30)	DS	25.4 (1.0)	260	10	130	V-0	All	*
<b>O-LEADING-S01</b>	0.25 (0.010)	0.25 (0.010)	17 (0.67)	SS	25.4 (1.0)	260	4	130	V-0	All	*

## WIRING, PRINTED - COMPONENT | UL Product iQ

<b>O-LEADING-S02</b>	0.2 (0.008)	0.2 (0.008)	17 (0.67)	SS	25.4 (1.0)	260	4	130	HB	▲	*
<b>O-LEADING-S03</b>	0.25 (0.010)	0.25 (0.010)	34 (1.34)	SS	25.4 (1.0)	260	4	130	V-0	All	*

\* - CTI marking is optional and may be marked on the printed wiring board.

Marking: Company name or file number and type designation. May be followed by a suffix to denote factory identification or burning test classification.

并不是所有出现在本数据库中的公司名称和产品都满足了UL跟踪检验服务的要求。只有带有UL标志的产品，才应该被视为经过UL认证，并满足UL跟踪检验服务的要求。注意查看产品上的标志。

UL 允许在线认证目录中所含材料的复制遵循以下条件：1.指南信息、装配、构造、设计、系统和/或认证（文件）必须在不篡改任何数据（或图纸）的情况下完整且无误导性地呈现。2.经UL允许从在线认证目录转载“声明必须出现在所摘录材料的邻近位置。此外，转载材料必须包含以下格式的版权声明：“© 2019 UL LLC”

## Shipping service



Quick Turn Lead Time		
Layer Count:	Lead Tim	Special Requirement
1L/2L	2-3days	24 Hours,48 Hours
4L	3-4days	48 Hours
6L	4-5days	72 Hours
8L	5-6days	NA
10L	6-7days	NA
12L	7-8days	NA
14L	8-9days	NA

Standard Lead Time		
Layer Count:	Sample Lead Time	Volume order lead time
2L	4 days	10 days
4L	5 days	11 days
6L	6 days	12 days
8L	8 days	14 days
10L	10 days	16 days
12L	12 days	18 days
14L	14 days	20 days
16-32L	18 days	24 days

## Prozessfähigkeit

### PCB-Produktionsfunktionen

Layer Count: 1LAYER-32LAYER

Fertigkupferdicke: 1 / 3Oz-12Oz

Min Linienbreite / Abstand intern: 3.0mil / 3,0mil

Min Linie Breite / Abstand External: 4.0mil / 4.0mil

Max-Seitenverhältnis: 10: 1

Boarddicke: 0,2 mm-5,0 mm

Max-Panel-Größe (Zoll): 635 \* 1500mm

Minimum Bohrlochgröße: 4mil

Platt-Lochtoleranz: +/- 3mil

Blind / begrabene Vias (All-Typen): Ja

Via Fill (leitfähig, nicht leitend): Ja

Basismaterial: FR-4, FR-4HIGH TG.halogenfreies Material, Rogers, Aluminiumbasis,Polyimid,

Schweres Kupfer

Oberflächenoberflächen: HASL, OSP, Riesen-, Hal-LF, Linssion Silber,Linssion Zinn, Goldfinger,

Kohlenstofffarbe

## **SMT-Produktionsfunktionen**

PCB-Material: FR-4, CEM-1, CEM-3, Bord von Aluminiumbasis

MAX PCB Größe: 510x460mm

MIN Leiterplattengröße: 50x50mm

PCB-Dicke: 0,5 mm-4,5 mm

Boarddicke: 0,5-4 mm

MIN-Komponenten Größe: 0201

Standard-Chipgröße-Komponente: 0603 und größer

Component max Height: 15mm

Min-Lead-Pitch: 0,3 mm

Min BGA Ball Pitch: 0,4 mm

Platzierung Präzision: +/- 0,03 mm